

# Pirna


An irregularly coursed natural stone masonry wall. Pirna is often used on bridge abutments and piers.

Liner is irregularly jointed. This can be extended in the A and/or B direction as required.

## Mat sizes

Article number	564910
Weight	35.00 kg/m <sup>2</sup>
Mat thickness	35 mm

A	5000 mm
B	1250 mm

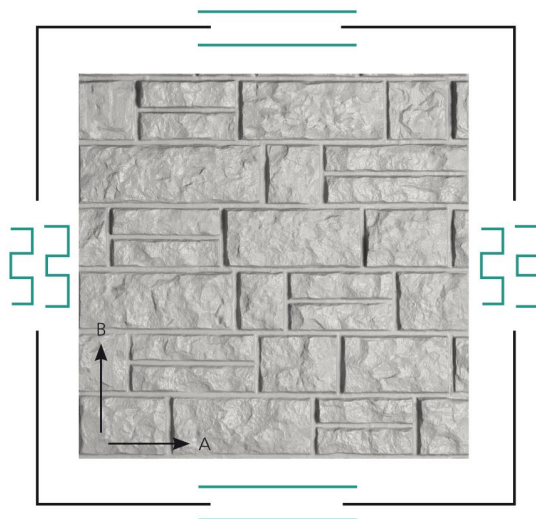

## Dimensional tolerances

A/B	± 1.00 %
Mat thickness	± 2.00 mm
Shore Hardness A	65-70
Heat resistance	+ 80.00 °C

