## NOUVEAU NIEUW ast | Masonry desigr NIEUW NEU NINOE - **Д** BrickFix IIEUW NEU **NEW** NIEUW **NOUVEAU** NIEUW NEU NEU NEW NEW **NOUVEAU** NIEUW NEW NEU **NOUVEAU NIEUW NEU** NEW NIEUW


This textured formliner is really something quite special. It does not simply form a texture on the surface of the concrete. Instead, hard-fired clay bricks are placed into it and the concrete cast on them. This creates a durable connection between the concrete and the artificial stone. The finished panels are very suitable for facades where a traditional hard-fired clay brick appearance is required.


Only for inlaying bricks, liner does not produce a patterned profiled concrete finish.

Total thickness 16mm

Joint depth 10mm

## Mat sizes

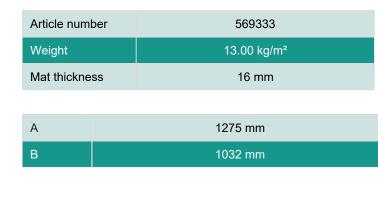



## **Dimensional tolerances**

A/B	± 1.00 %
Mat thickness	± 2.00 mm
Shore Hardness A	65-70
Heat resistance	+ 80.00 °C

