




This Utrecht structure is often used when a deliberately “raw” concrete character is desired. The rib spacing of 20/24 mm ensures balanced proportions that create an impressive effect both up close and from a distance.

Mat sizes

Article number	569386
Weight	25.80 kg/m ²
Mat thickness	28 mm

A	1188 mm
B	6000 mm

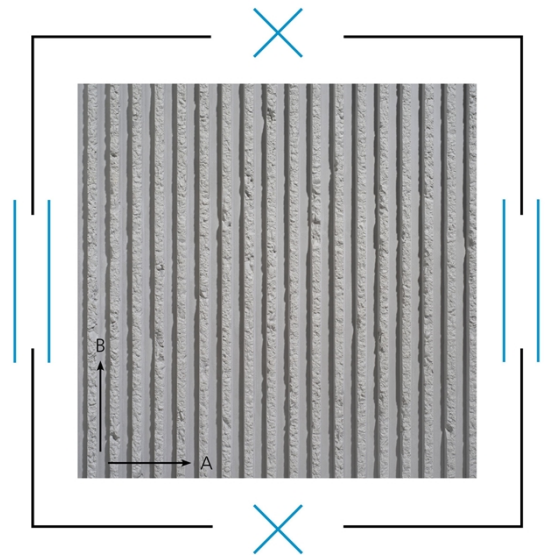

Dimensional tolerances



A/B	± 1.00 %
Mat thickness	± 2.00 mm
Shore Hardness A	65-70
Heat resistance	+ 80.00 °C

