

NOE parts list

Dated: 07.2025

Table of Contents

For the delivery of the parts listed in this list only apply "General NOE Terms and Conditions".

We accept no liability for any printing errors.



Technical representations and information as well as illustrations are non-binding. Technical changes reserved.

Systeme	pages
NOEtop4	1-16
NOEtop	17-47
NOEalu XLS / NOEalu L	48-59
NOE support bracket	60-71
NOE stabilizers and push-pull braces	72-77
NOEtop circular formwork	78-101
NOE column formwork	102-116
NOE deck formwork	117-153
NOE scaffolding	154-172
NOE shoring	173-182
NOE formwork and scaffolding accessories	184-219



Index

Description	220-225
Part No.	225-234

NOEtop4 panels with NOEform facing

	Description	Width mm	Height mm	Surface m ²	Weight approx. kg	Part No.
	NOEtop4 panels	2400	3600	8,64	609,3	165020
	3600 mm high,	1200	3600	4,32	334,0	165022
	with 21 mm NOEform facing,	900	3600	3,24	255,3	165024
	galvanised	600	3600	2,16	181,5	165026
		450	3600	1,62	152,0	165028
		300	3600	1,08	118,6	165030
	NOEtop4 panels	2400	3000	7,20	508,1	165040
	3000 mm high,	1200	3000	3,60	278,9	165042
	with 21 mm NOEform facing,	900	3000	2,70	199,7	165044
	galvanised	600	3000	1,80	149,1	165046
		450	3000	1,35	123,6	165048
		300	3000	0,90	98,2	165050
	NOEtop4 panels	2400	900	2,16	172,5	165060
	900 mm high,	1200	900	1,08	93,5	165062
	with 21 mm NOEform facing,	900	900	0,81	80,3	165064
	galvanised	600	900	0,54	57,5	165066
		450	900	0,41	46,1	165068
		300	900	0,27	35,0	165070

NOEtop4 panels with NOEecopan facing


	Description	Width mm	Height mm	Surface m ²	Weight approx. kg	Part No.
	NOEtop4 panels	2400	3600	8,64	586,8	165120
	3600 mm high,	1200	3600	4,32	322,3	165122
	with NOEecopan facing,	900	3600	3,24	246,4	165124
	galvanised	600	3600	2,16	175,4	165126
		450	3600	1,62	144,8	165128
		300	3600	1,08	115,2	165130
	NOEtop4 panels	2400	3000	7,20	489,7	165140
	3000 mm high,	1200	3000	3,60	269,0	165142
	with NOEecopan facing,	900	3000	2,70	192,5	165144
	galvanised	600	3000	1,80	144,0	165146
		450	3000	1,35	119,4	165148
		300	3000	0,90	95,1	165150
	NOEtop4 panels	2400	900	2,16	167,0	165160
	900 mm high,	1200	900	1,08	89,2	165162
	with NOEecopan facing,	900	900	0,81	79,8	165164
	galvanised	600	900	0,54	51,0	165166
		450	900	0,41	45,6	165168
		300	900	0,27	31,7	165170

NOEtop4 corner solutions


	Description	Width mm	Height mm	Surface m ²	Weight approx. kg	Part No.
	Aluminium external corner	110	3600		23,3	850050
	angle 90°	110	3000		19,5	850051
		110	900		5,8	850052
	aluminium					
	90° internal corner	300	3600	2,16	137,0	165090
	with 4° stripping play and stop for	300	3000	1,80	116,4	165092
	easy erection and stripping, with	300	900	0,54	44,2	165094
	21 mm NOEform facing, galvanised					
	90° internal corner	300	3600	2,16	132,6	165190
	with 4° stripping play and stop for	300	3000	1,80	112,7	165192
	easy erection and stripping, with	300	900	0,54	41,3	165194
	NOEecopan facing, galvanised					

	Description	Width mm	Height mm	Surface m ²	Weight approx. kg	Part No.
	External corner angle 90° 150mm	272	3600	1,80	158,5	165080
	with 21 mm NOEform facing,	272	3000	0,90	132,6	165082
	steel, galvanised	272	900	0,27	43,4	165084
	External corner angle 90° 150mm	150	3600	1,08	155,0	165180
	with NOEecopan facing, steel,	150	3000	0,90	129,5	165182
	galvanised	150	900	0,27	42,2	165184
	NOEtop4 adjustable external corner	120	3600			137865
		120	3000			137864
	usable as an external corner of 60-180°, with durably elastic, soiling-resistant PU strip in the corner zone, galvanised	120	900			137863
	NOEtop 4 adjustable internal corner	120	3600			137812
		120	3000			137848
	usable as an internal corner of 60-180°, with durably elastic, soiling-resistant PU strip in the corner zone, galvanised	120	900			137847


NOEtop4 one-sided tension Ø 20 mm

	Description	Length mm	Width mm	Height mm	Weight approx. kg	Surface m ²	Part No.
	NOEtop4 conical anchor rods for wall thicknesses of 15 - 30 cm, Ø 20 mm, galvanised	655			2,6		850008
	NOEtop4 conical anchor rods for wall thicknesses of 25 - 40 cm, Ø 20 mm, galvanised	755			3,0		850009
	NOEtop4 adjuster nut, For adjusting the wall thickness, galvanised, 1 securing bracket (part no. 850013) is required for securing	214	55		1,8		850006
	NOEtop4 Fix Support For use in formwork, galvanised 1 NOEtop4 Safety Bolt (part no. 850012) + cotter pin (part no. 913303) is required for securing	90	54		0,9		850007
	NOEtop4 securing bracket for securing NOEtop4 adjuster nut, galvanised	56	84		0,1		850013
	NOEtop4 Safety Bolt For securing NOEtop4 Fix Support and locking pin , galvanised	136			0,1		850012
	NOEtop4 distance protection galvanised				0,7		850011
	NOEtop4 locking pin galvanised	128	30		0,6		928012
	NOEtop4 spring pin galvanised						913303
	NOEtop4 PU exposed concrete cone with magnet				0,2		850055


Tie rod Ø 20 mm

	Description	Length mm	Width mm	Height mm	Surface m ²	Weight kg / m ²	Part No.
	Tying nut Ø 20 mm Galvanised					0,5	680009
	Waling plate Ø 20 mm galvanised	140	110			0,7	691509
	Waling plate with wing nut galvanised	140	110			1,1	691600
	Round calotte plate DW20, D130 mm					1,8	691601
	Tie rod Ø 20 mm	950				2,4	670959
	galvanised	1250				3,2	671259

NOEtop clamps


	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
	NOE Toplock for panel connections and longitudinal compensations up to 42 mm, permissible tensile load 15 kN, galvanised				3,7	137976
	NOE Toplock X				4,3	137960
	NOE Toplock H for panel connections and longitudinal compensations up to 100 mm, permissible tensile load 20 kN, galvanised				4,4	137970
	Alignment clamp for use on large areas of formwork to create butt joints capable of transferring bending moments, galvanised				19,8	135309
	Extension clamp for on-site extensions using formwork boards up to max. 200 mm, galvanised Can not be used with crane hook. Instead use 2x ring bolts M 16 (821110), 2x safety nuts M 16 (373013) and spacer washer for M 16 (314600).				3,2	137850

NOEtop longitudinal compensation

	Description	Width mm	Height mm	Surface m ²	Weight approx. kg	Part No.
	Compensation channel 410 mm long, galvanised				9,4	135109
	Extension channel 1000 mm long, GR 35, for aligning formwork at compensation panels and timber compensation pieces, galvanised				15,5	135208
	Alignment channel 1425 mm long, galvanised				21,5	135210
	Extension clamp for on-site extensions using formwork boards up to max. 200 mm, galvanised Can not be used with crane hook. Instead use 2x ring bolts M 16 (821110), 2x safety nuts M 16 (373013) and spacer washer for M 16 (314600).				3,2	137850
	NOEtop4 Safety Bolt For heavy-duty attachment of stabilisers and alignment rails to NOEtop4. 1 L-pin, part no. 697010 + 1 spring pin, part no. 913304 required for securing. galvanised				0,7	850014
	Waling plate with wing nut bearing area 140x100 mm, galvanised	140			1,4	691700
	L-pin Ø 16 yellow passivated galvanized				0,3	697010
	Spring pin Ø 4 mm galvanised				0,0	913304

	Description	Width mm	Height mm	Surface m ²	Weight approx. kg	Part No.
	Hammer-head bolt with handle integrated Sprint nut 230 mm long, clamp length 125 mm, permissible tensile load =18.8 kN, galvanised				1,2	319338
	Hammer-head bolt with handle Integrated Sprint nut 330 mm long, clamp length 205 mm, permissible tensile load = 18.8 kN, galvanised				1,2	319339
	Hammer-head bolt with handle KL 230	230			1,3	319343
	Sprint nut galvanised	80	60		0,7	680580

Accessories for special tasks

	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
	NOEtop Connection screw 250 with tie-rod thread DW 15 mm, length 280 mm, thread length 250 mm, galvanised	285			0,5	135019
	NOEtop stop-end support for Ø 15 mm tie rods, galvanised				0,7	164032
	NOEtop stop-end support for Ø 15 mm tie rods, galvanised				2,1	164036
	Bolt M 18x160 with nut and 4 washers, galvanised Hire only! For purchase see price list for formwork and scaffold accessories.				0,5	318900
	Bolt M 18x100 With nut and 3 washers, galvanised Hire only! For purchase see price list for formwork and scaffold accessories.				0,4	318801
	L-pin Ø 16 yellow passivated galvanised				0,3	697010
	Spring pin Ø 4 mm galvanised				0,0	913304


NOEtop4 stripping corners

	Description	Length mm	Width mm	Height mm	Surface m ²	Weight approx. kg	Part No.
	NOEtop4 stripping corners		320	3600			137868
			320	3000			137869
			320	900			137870
	Magnet set for stripping corners a magnet set consists of 4 cast-in magnets and one retrieval magnet, brass housing, retrieval magnet with internal thread M 6 attachment force 450 N for 25 mm Ø, 700 N for 32 mm Ø			35		1,1	694981
				40		1,2	694982
	NOE lever arm for stripping the NOEtop stripping corner, galvanised					3,9	398202
	Lever head galvanized					5,9	924950
	Prop support for providing horizontal support to Europrops and NOEprops on shaft formwork, galvanised. 1 hammerhead bolt with handle (Part No. 319338) is required for attaching.	335	70	150		1,8	890845
	Bolt M 18x160 with nut and 4 washers, galvanised Hire only! For purchase see price list for formwork and scaffold accessories.					0,5	318900
	Bolt M 16x40 with nut and washer, galvanised Hire only! For purchase see price list for formwork and scaffold accessories.					0,1	313400
	Waling plate for hammer-head bolt 319343	180	120	10		1,6	319350


Transport aids

	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
	Lifting pin with trap. Moving single panels requires 4 lifting pins, P = 5 kN, galvanised				0,7	136808
	Crane hook for NOEtop profile, with suspension chain, load 2000 kg for vertical tension, for use see operating instructions, galvanised				6,4	135905
	NOE transport hanger for NOEtop load 2000 kg				12,8	922910

NOE foundation ties

	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
	Foundation clamp for use with perforated steel strap, galvanised				1,5	137297
	Tying claw a method of connecting over the top of the panel if not using the tie rod holes, galvanised				1,4	137500
	Perforated steel strap permissible tensile load 16 kN supplied in 50-m rolls				24,0	108031

NOEtop scaffold

	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
	Top walkway bracket usable with end-on and side-on panels, each Top walkway bracket requires 1 handrail tube (Part No. 111403), without nail core, galvanised		1000		12,4	552204
	Handrail tube 1060 1060 mm high, tube Ø 33.7 mm, galvanised **hire only **			1060	4,0	111400
	Handrail tube 1380 H 1380 mm high, tube Ø 33.7 mm, galvanised			1380	5,0	111403
	NOEtop clamp support handrail tube allows a guard rail to be attached to provide anti-fall protection on the opposite side of the formwork, max. guard rail post inclination 14°, Plug (T.-Nr. 890834), galvanised, is required to attach the guard rail tube				3,1	552214
	LG-W 200 plug 9 mm galvanized				0,1	890834


	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
	NOETop4 Hinged scaffold steel		1200			522545
	galvanised		2400			522504
	NOETop4 Hinged scaffold steel with hatch galvanised		2400			522503

Stabilizers and push-pull braces NOEtop



Individual parts

	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
	NOEtop stabilizer connector galvanised				3,0	697032
	Push-pull prop 5.00-7.50 m Extension 5000-7500 mm Load: 20-11.1 kN	5000-7500			60,8	697133
	Push/pull brace Push/pull 2.77-5.00 m ext. length 2770-5000 mm load: 29.5-6.1 kN	2770-5000			25,7	697028
	Push/pull brace Push/pull 2.10-3.65 m ext. length 2100-3650 load: 19.7-6.3 kN	2100-3650			19,1	697027
	Push/pull brace Push/pull 1.00-1.51 m ext. length 1000-1510 mm load: 19.7 kN	1000-1510			9,4	697026
	Supporting plate for push/pull brace/raking props/stabilizers				3,8	697014
	L-pin Ø 16 yellow passivated galvanized				0,3	697010
	Spring pin Ø 4 mm galvanised				0,0	913304

NOEtop formwork support



	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
	NOEtop formwork support for the support of the NOEtop wall formwork where space is tight. Adjustment range ± 75 mm, galvanized	200	165	360	9,8	164700
	NOEtop Bolt 76 with tie-rod thread DW 15 mm, Length 105 mm, thread length 76 mm, galvanized	105			0,3	164704
	NOE anchor cap D 15 Polyamide, FMFA approved, for tie rod $\varnothing 15$ mm Packaging Unit: 50 pieces				3,4	694901
						
	NOE plug D 15 Polyamide Packaging Unit: 50 pieces				0,1	694904
	NOE nailing plate D 15 Polyamide Packaging Unit: 50 pieces				0,4	694903
	NOE nailing plug D 15 Polyamide Packaging Unit: 50 pieces				0,2	694902
	Washer shape A 17 DIN 125, galvanised, packaging unit 250 No.				2,8	380026

NOEtop large panel with integral bracing system, with NOEform facing (purchase only)



	Description	Width mm	Height mm	Surface m ²	Weight approx. kg	Part No.
	NOEtop large panels (with cantilever)	5300	2650	14,05	932,5	168067
		3310	2650	8,77	589,9	168066
	with predrilled and bushed tie bar holes, with 21 mm NOEform facing, formwork facing continuous, galvanised	2650	2650	7,02	478,7	168065
	NOEtop large panels (compatible with NOE Top 2000)	5300	2650	14,05	941,4	168062
		3310	2650	8,77	598,7	168061
	with predrilled and bushed tie bar holes, with 21 mm NOEform facing, formwork facing continuous, galvanised	2650	2650	7,02	496,8	168060

NOEtop large panel with integral bracing system, with NOEform facing


fFacing butt jointed, 5300 mm 4-part, 3x tongue and groove, 3310 and 2650 mm 2-part, 1x tongue and groove

	Description	Width mm	Height mm	Surface m ²	Weight approx. kg	Part No.
	NOEtop large panel (with cantilever)	5300	2650	14,05	932,5	168051
		3310	2650	8,77	589,9	168052
	With predrilled and bushed tie bar holes, with 21 mm NOEform facing, formwork facing with tongue and groove, galvanised	2650	2650	7,02	478,7	168053
	NOEtop large panels (compatible with NOE Top 2000)	5300	2650	14,05	941,4	168049
		3310	2650	8,77	598,7	168033
	with predrilled and bushed tie bar holes, with 21 mm NOEform facing, formwork facing with tongue and groove, galvanised hire only	2650	2650	7,02	496,8	168029

NOEtop panels with multihole horizontal stiffeners, with NOEform facing

	Description	Width mm	Height mm	Surface m ²	Weight approx. kg	Part No.
	Panels	1325	3310	4,39	252,9	160065
	3310 mm high,	1000	3310	3,31	204,8	160067
	with 21 mm NOEform facing,	750	3310	2,48	168,1	160068
	galvanised	550	3310	1,82	138,6	160070
		500	3310	1,66	131,2	160071
		450	3310	1,49	123,8	160073
		400	3310	1,32	116,4	160074
		250	3310	0,83	94,1	160075
	Panels	1325	2650	3,51	205,2	168019
	2650 mm high,	1000	2650	2,65	166,2	168209
	with 21 mm NOEform facing,	750	2650	1,99	136,3	168309
	galvanised	550	2650	1,46	112,1	168609
		500	2650	1,33	106,1	168409
		450	2650	1,19	100,1	168749
		400	2650	1,06	94,1	168909
		250	2650	0,66	76,0	168509
	Panels	1325	1325	1,76	111,6	169009
	1325 mm high,	1000	1325	1,33	90,3	169209
	with 21 mm NOEform facing,	750	1325	0,99	74,1	169309
	galvanised	550	1325	0,73	61,0	169609
		500	1325	0,66	57,7	169409
		450	1325	0,59	54,5	169749
		400	1325	0,53	51,2	169909
		250	1325	0,33	41,0	169509
	Panels*	1325	660	0,88	63,2	163019
	660 mm high,	1000	660	0,66	51,1	163209
	with 21 mm NOEform facing,	750	660	0,50	41,9	163309
	galvanised *** = purchase only,	550	660	0,36	34,2	163609
	not for hire**	500	660	0,33	32,3	163409
		450	660	0,30	30,5	163749
		400	660	0,26	28,6	163909
		250	660	0,17	22,9	163509

NOEtop multifunction panel, with NOEform facing


	Description	Width mm	Height mm	Surface m ²	Weight approx. kg	Part No.
	NOEtop multifunction panel	1325	3310	4,39	334,3	168022
	with 21 mm NOEform facing,	1325	2650	3,51	259,7	168020
	galvanised	1325	1325	1,76	138,2	168021

NOEtop Alu panels, with NOEform facing

purchase only, not for hire

	Description	Width mm	Height mm	Surface m ²	Weight approx. kg	Part No.
	NOEtop Alu panels	900	3310	2,98	83,7	167278
	3310 mm high, with 15 mm	883	3310	2,92	82,5	167280
	NOEform facing, powder-coated	750	3310	2,48	73,8	167282
	RAL 6033	550	3310	1,82	60,5	167284
		500	3310	1,66	57,2	167286
		450	3310	1,49	53,9	167288
		400	3310	1,32	50,5	167290
		300	3310	0,99	43,8	167292
		250	3310	0,83	40,7	167294
		200	3310	0,66	37,3	167296
	NOEtop Alu panels	1000	2650	2,65	67,9	167321
	2650 mm high, with 15 mm	900	2650	2,39	65,0	167320
	NOEform facing, powder-coated	883	2650	2,34	64,2	167322
	RAL 6033	750	2650	1,99	57,2	167324
		550	2650	1,46	46,3	167326
		500	2650	1,33	44,2	167328
		450	2650	1,19	41,7	167330
		400	2650	1,06	39,0	167332
		300	2650	0,80	33,9	167334
		250	2650	0,66	31,3	167336
		200	2650	0,53	28,7	167338
	NOEtop Alu panels	1325	1325	1,76	53,3	167378
	1325 mm high, with 15 mm	1000	1325	1,33	44,0	167380
	NOEform facing, powder-coated	900	1325	1,19	35,5	167381
	RAL 6033	883	1325	1,17	34,4	167340
		750	1325	0,99	31,1	167382
		550	1325	0,73	25,3	167384
		500	1325	0,66	23,9	167385
		450	1325	0,60	22,5	167387
		400	1325	0,53	21,0	167388
		300	1325	0,40	20,0	479945
		250	1325	0,33	16,7	167389
		200	1325	0,27	15,2	167390

NOEtop corner solutions, with NOEform facing

	Description	Width mm	Height mm	Surface m ²	Weight approx. kg	Part No.
	External corner panels 1000	1000	3310	3,31	267,0	160076
	with 21 mm NOEform facing,	1000	2650	2,65	214,2	167009
	galvanised	1000	1325	1,33	113,7	167019
	(660) = purchase only	1000	(660)	0,66	54,6	163009
	External corner panels 750	750	3310	2,48	169,1	160077
	with 21 mm NOEform facing	750	2650	1,99	137,4	167010
	(660) = purchase only	750	1325	0,99	71,0	167020
		750	(660)	0,50	50,6	163010
	Multi-claw galvanised				3,5	164030
	Tie rod Ø 15 mm part no. 67 ... with length in mm added, galvanised				1,4	670950
	Waling plate with wing nut bearing area 140x100 mm, galvanised	140			1,4	691700
	90° internal corner	250	3310	1,66	125,3	160078
	with 4° stripping play and stop for easy erection and stripping, with	250	2650	1,33	102,8	167209
	21 mm NOEform facing, with	250	1325	0,66	60,9	167219
	galvanised (660) = purchase only	250	(660)	0,33	36,0	167249
	Aluminium external corner angle	110	3310		25,3	164065
	90°	110	2650		16,9	164064
	aluminium	110	1325		8,4	164063
	(660) = purchase only	110	(660)		4,2	164061




	Description	Width mm	Height mm	Surface m ²	Weight approx. kg	Part No.
	External corner angle 90°	110	3310		61,0	164045
	steel, galvanised	110	2650		50,1	164044
	(660) = purchase only	110	1325		25,4	164043
		110	(660)		13,0	164042
	Adjustable internal corner	300	3310	1,99	158,8	164003
	usable as an internal corner of	300	2650	1,59	133,0	164002
	60-180°, with durably elastic,	300	1325	0,80	76,8	164001
	soiling-resistant PU strip in the corner zone, galvanised (660) = purchase only	300	(660)	0,40	47,4	164000
	Adjustable external corner	112,5	3310	0,75	99,0	164008
	usable as an external corner of	112,5	2650	0,60	80,5	164007
	60-180°, with durably elastic,	112,5	1325	0,30	43,5	164006
	soiling-resistant PU strip in the corner zone, galvanised (660) = purchase only	112,5	(660)	0,15	21,8	164005
	Aluminium corner chamfer strips with plastic insert		3310		6,1	913021
			2650		4,9	913022
	for adjustable NOEtop internal		1325		2,5	913023
	and external corners, fastening requires countersunk bolts, Part No. 365135.		660		1,5	913024
	Adjustable NOEtop internal corner					
	height 3310 mm 32 bolts					
	height 2650 mm 26 bolts					
	height 1325 mm 16 bolts					
	height 660 mm 10 bolts					
	Adjustable NOEtop external corner					
	height 3310 mm 32 bolts					
	height 2650 mm 28 bolts					
	height 1325 mm 18 bolts					
	height 660 mm 10 bolts hire only					


NOEtop Alu corner solutions, with NOEform facing

purchase only, not for hire



	Description	Width mm	Height mm	Surface m ²	Weight approx. kg	Part No.
	NOEtop Alu external corner panels	883	2650	2,34	70,7	167363
	with 15 mm NOEform facing, powder-coated RAL 6033	883	1325	1,17	36,5	167366
	NOEtop Alu 90° internal corner	250	2650	1,33	43,3	167372
	with 15 mm NOEform facing, powder-coated RAL 6033	250	1325	0,66	23,7	167376

NOEtop clamps

	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
	NOE Toplock for panel connections and longitudinal compensations up to 42 mm, permissible tensile load 15 kN, galvanised				3,7	137976
	NOE Toplock X				4,3	137960
	NOE Toplock H for panel connections and longitudinal compensations up to 100 mm, permissible tensile load 20 kN, galvanised				4,4	137970
	NOE Toplock adapter NOEtop / NOEtop R clamps to connect NOEtop and NOEtop R, galvanised				4,4	137979
	Alignment clamp for use on large areas of formwork to create butt joints capable of transferring bending moments, galvanised				19,8	135309
	Adjustable wedge clamp For infinitely adjustable compensation piece 0-250 mm, permissible tensile load 12 kN, galvanised Hire only				5,5	136209
	Adjustable wedge clamp For infinitely adjustable compensation piece 0-120 mm, permissible tensile load 8 kN, galvanised, Hire only				4,5	136200
	Wedge clamp For the quick connection of any arrangement of panels, permissible tensile load 15 kN, galvanised, Hire only				3,9	138090

	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
	Bolt M 18x160 with nut and 4 washers, galvanised Hire only! For purchase see price list for formwork and scaffold accessories.				0,5	318900
	Toplock for the quick butted connection of any arrangement of panels, compensation up to 30 mm, permissible tensile load 20 kN, galvanised, Hire only				3,7	137990
	Top Adjustable lock for infinitely adjustable compensation piece 0-135 mm, permissible tensile load 20 kN, galvanised, hire only				5,2	137985
	NOEtop stop-end support for Ø 15 mm tie rods, galvanised				0,7	164032
	NOEtop stop-end support for Ø 15 mm tie rods, galvanised				2,1	164036
	Stop-end clamp Usable up to a wall thickness of 365 mm, galvanised, for hire only				9,9	137830
	Extension channel 1000 mm long, GR 35, for aligning formwork at compensation panels and timber compensation pieces, galvanised	1000			15,5	135208
	Waling plate with wing nut bearing area 140x100 mm, galvanised	100	140		1,4	691700


NOEtop longitudinal compensation

	Description	Width mm	Height mm	Surface m ²	Weight approx. kg	Part No.
	Compensation channel 410 mm long, galvanised				9,4	135109
	Extension channel 1000 mm long, GR 35, for aligning formwork at compensation panels and timber compensation pieces, galvanised				15,5	135208
	Alignment channel 1425 mm long, galvanised				21,5	135210
	NOEtop4 alignment channel				24,5	850039
	Extension clamp for on-site extensions using formwork boards up to max. 200 mm, galvanised Can not be used with crane hook. Instead use 2x ring bolts M 16 (821110), 2x safety nuts M 16 (373013) and spacer washer for M 16 (314600).				3,2	137850

Bolts

	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
	Countersunk bolt M 8x30 DIN 7991, 8.8, galvanised, packaging unit 200 No.				2,0	365132
	Safety nut M 8 DIN 985, 8.0, galvanised, packaging unit 1000 No.				5,1	373004


NOEtop stripping corners

	Description	Width mm	Height mm	Surface m ²	Weight approx. kg	Part No.
	NOEtop stripping corner	300	3310	1,99	209,5	137768
	20 mm stripping play both sides,	300	2650	1,59	175,0	137762
	the forms are connected each	300	1325	0,80	87,5	137761
	side up to 2650 mm high by 3 NOE Toplocks (Part No. 137976) and up to 3310 mm high by 4 NOE Toplocks, alternatively they can be connected each side by 2 bolts M18x160 (Part No. 318900), for the extensions 2 bolts M16x40 (Part No. 313400) are required, galvanised Operating the NOEtop stripping corner requires at least 1 NOE lever arm. Observe the AuV (assembly and use instructions) for the NOEtop stripping corner.					
	NOE lever arm for stripping the NOEtop stripping corner, galvanised				3,9	398202
	Lever head galvanized				5,9	924950
	Magnet set for stripping corners		35		1,1	694981
	a magnet set consists of 4 cast-in magnets and one retrieval magnet, brass housing, retrieval magnet with internal thread M 6 attachment force 450 N for 25 mm Ø, 700 N for 32 mm Ø		40		1,2	694982
	Bolt M 18x160 with nut and 4 washers, galvanised Hire only! For purchase see price list for formwork and scaffold accessories.				0,5	318900
	Bolt M 16x40 with nut and washer, galvanised Hire only! For purchase see price list for formwork and scaffold accessories.				0,1	313400

	Description	Width mm	Height mm	Surface m ²	Weight approx. kg	Part No.
	Prop support for providing horizontal support to Europrops and NOEprops on shaft formwork, galvanised. 1 hammerhead bolt with handle (Part No. 319338) is required for attaching.	70	150		1,8	890845
	Hammer-head bolt with handle integrated Sprint nut 230 mm long, clamp length 125 mm, permissible tensile load =18.8 kN, galvanised				1,2	319338
	Hammer-head bolt with handle Integrated Sprint nut 330 mm long, clamp length 205 mm, permissible tensile load = 18.8 kN, galvanised				1,2	319339
	Hammer-head bolt with handle KL 230	230			1,3	319343
	Waling plate for hammer-head bolt 319343	120	10		1,6	319350

Tie rod Ø 15 mm

Rods, core Ø 15 mm, external Ø 17 mm, permissible tensile load 90 kN (in acc. with DIN 18216).

	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
	Tie rod Ø 15 mm capped, galvanised	950			1,4	670950
	Waling plate with wing nut bearing area 140x100 mm, galvanised	100	140		1,4	691700
	Sprint nut galvanised	80	80	60	0,7	680580
	Hexagonal nut 60 with standard tie rod internal thread galvanised	60			0,3	681000
	Hexagonal nut 30 with standard tie rod internal thread galvanised	30			0,1	680900
	NOEtop EinsA Fixlager Support plate on the positioning side of the formwork, use with large panels NOEtop with integrated reinforcement, allows unilateral clamping with Schwupp tension rod Ø 15mm, galvanized	168	120		2,7	680045
	NOE EinsA magnetic bearings Magnetization / grade N35 NiCuNi coating Holding force approx. 35 kg Max. Operating temperature 80 ° C	182	119	133	2,8	680060
	NOEtop EinsA Distance compensation				0,8	680052

Tie rod Ø 20 mm

Not weldable! Observe approval document information! Core Ø 20 mm, external Ø 22.5 mm
permissible tensile load 150 kN (in acc. with DIN 18216),

	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
	Tie rod Ø 20 mm	2500			6,4	672509
	galvanised	1750			4,6	671759
		1500			3,8	671509
		1250			3,2	671259
		950			2,4	670959


Tie rod nut for tie rods Ø 20 mm

	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
	Waling plate with wing nut galvanised	140	110		1,1	691600
	Tying nut Ø 20 mm Galvanised				0,5	680009
	Waling plate Ø 20 mm P = 160 kN, smooth bearing area, galvanised	150	100		2,2	691519

Watertight tie rod Ø 20 mm

	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
	Coupler nut Ø 20 mm, SW 36, permissible tensile load 160 kN	140			0,7	682220
	Tie cone Ø 20 mm, complete cone 2-part, permissible tensile force 90 kN (in acc. with DIN 18216), minimum wall thickness 300 mm				0,5	686910
	Tie cone Ø 20 mm, steel insert				0,5	686911
	Tie cone conical plastic shell				0,1	686901
						

NOEtop scaffold




	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
	Top walkway bracket usable with end-on and side-on panels, each Top walkway bracket requires 1 handrail tube (Part No. 111403), without nail core, galvanised		1000		12,4	552204
	Nailing core for walkway brackets made from recycled plastic	1000	40	40	1,4	556004
	NOEtop clamp support handrail tube allows a guard rail to be attached to provide anti-fall protection on the opposite side of the formwork, max. guard rail post inclination 14°, Plug (T.-Nr. 890834), galvanised, is required to attach the guard rail tube				3,1	552214
	Handrail tube 1380 H 1380 mm high, tube Ø 33.7 mm, galvanised			1380	5,0	111403
	Handrail tube 1060 1060 mm high, tube Ø 33.7 mm, galvanised **hire only **			1060	4,0	111400
	LG-W 200 plug 9 mm galvanized				0,1	890834

	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
	Hinged scaffold steel		2650	1730	183,2	552241
	for suspending from NOEtop edge profiles. With rubber plate to protect the edge profile. Galvanised. Related side railing: Concreting scaffold steel end guard rail Part no. 552250		1325	1730	133,6	552243
	Hinged scaffold steel with hatch for suspending from NOEtop edge profiles. With rubber plate to protect the edge profile. Galvanised. Related side railing: Concreting scaffold end guard rail Part no. 552250		2650	1730	183,5	552240
	Hinged scaffold steel External corner platform left and right. Galvanised. 2 concreting scaffold steel connectors, part no. 552251 + 2 spring pins, part no. 555990 are required for connection to the platform				50,0	552267
	Hinged scaffold steel connector For connecting external corner platforms to the platform. 2 spring pins, part no. 555990, are required for each connector	500			1,2	552251
	Hinged scaffold steel platform extension galvanised		1547		20,2	552268
	End guardrail for hinged scaffold steel				17,0	552250



	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
	Hinged scaffold		2650	1265	173,9	552210
	for suspending from NOE top edge profiles. Suspension from "on-side" top-hat profiles requires 2 suspension heads per concreting scaffold, Part No. 556924. These must be ordered separately. Related side railing: Concreting scaffold end guard rail Part no. 552218 Steel components galvanised, timber components impregnated		1325	1265	113,4	552211
	Hinged scaffold with hatch for suspending from NOE top edge profiles. Suspension from "on-side" Top-hat profiles require 2 suspension heads per concreting scaffold, Part No. 556924. These must be ordered separately. Related side railing: Concreting scaffold end guard rail Part no. 552218 Steel components galvanised, timber components impregnated	1265	2650		250,3	552212
	Suspension head for hinged concreting scaffold for suspending from the edge profile, fastening requires 3 bolts M 12x90 with 3 safety nuts M 12.				0,8	556926
	Suspension head for hinged concreting scaffold for suspending in the hat profile, fastening requires 3 bolts M 12x90 with safety nuts.				0,4	556924
	Bolt M 12x90 DIN 601 Hire only! For purchase see price list for formwork and scaffold accessories.				0,2	311600
	Safety nut M 12 DIN 985, 8.0, galvanised, packaging unit 200 No.				3,4	373008


	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
	Rubber plate	1255			1,4	556007
	to protect the edge profile of the panels (replacement part for the folding concreting scaffold)	2580			2,9	556008
	Hexagonal bolt M 8x80 DIN 931, 8.8, galvanised, packaging unit 200 No.				7,1	360078
	Hexagonal nut M 8 DIN 934, 8.0, galvanised, packaging unit 1000 No.				4,7	370016
	Washer shape A 8.4 DIN 125, galvanised, packaging unit 1000 No.				2,1	380018
	NOEtop S ladder support with step galvanised	850	150	266	9,4	550023

NOEtop scaffold platform with ladder ascent



	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
	NOEtop scaffold platform with hatch	2600	885		67,4	550010
		1300	885		47,3	550012
	NOEtop scaffold platform galvanised	2600	885		58,4	550014
	LSS ladder 2800		450	1015	2,7	126764
	incl. Ribbed plugs aluminium		450	1855	4,9	126763
			450	2415	6,3	126762
			450	2695	7,0	126761
			450	2975	7,7	126760
	Ladder support with step for NOEtop and NOEalu L scaffold platforms, steel, galvanised For connection, a hammer-head bolt with handle 319338 is required				8,3	550024
	Adapter for attaching handrail tubes to NOEtop scaffold platforms				1,0	550025
	NOEtop S ladder support with step galvanised	850	150	266	9,4	550023
	Handrail tube 1380 H 1380 mm high, tube Ø 33.7 mm, galvanised			1380	5,0	111403
	Handrail tube 1060 1060 mm high, tube Ø 33.7 mm, galvanised **hire only **			1060	4,0	111400

	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
	Guardrail post tube 1600 1600 mm high, for guardrail holder Ø 33.7 mm, galvanised			1600	8,2	111401
	Guard rail tube 1880 GR 3 wedges (Part No. 507012) are required per guard rail tube, galvanised used with CS frame grillage	150	50	1880	8,0	507011
	Guard rail tube 1380 GR 2 wedges (Part No. 507012) are required per guard rail tube, galvanised used with CS frame grillage	150	50	1380	5,8	507010
	Wedge for guard rail tube GR	230	15	52	0,3	507012
	LG-W 200 plug 9 mm galvanized				0,1	890834
	NOEsafe protective grille 2600 can be used with the railing tube part no. 507024	2600	1210	1500	19,8	507040
	NOEsafe frame grid box Capacity max. 60 protective grids Stacking height max. 2 units, galvanised	1335	1200	1200	83,0	507042
	NOEsafe railing tube 1450mm		1450		4,3	507024

	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
	NOEsafe railing bracket galvanised	175	125	150	1,3	507020
	NOEsafe grille holder fitted	100	50	112	0,4	507029
	Bolt MMS-plus 16X130 SSK Package of 10 pieces purchase only				2,4	313151
	NOE anchor cap D 15 Polyamide, FMFA approved, for tie rod Ø 15 mm Packaging Unit: 50 pieces				3,4	694901
						
	NOEtop Connection bolt 100 thread length 100 mm, galvanised				0,3	135010
	CS frame grillage 2556 used with guard rail tube 1380 GR (Part No. 507010) and guard rail tube 1880 GR (Part No.507011)	2556	25	1150	17,0	507045
	CS frame grillage 1256 used with guard rail tube 1380 GR (Part No. 507010) and guard rail tube 1880 GR (Part No. 507011)	1256	25	1150	9,0	507047

	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
	CS Barrier box capacity max. 40 frame grille, Setting grid box can be dismantled, Stacking height max. 4 pieces,galvanised				97,0	507048
	NOE top end guard rail 1 NOE top adapter end guard rail (Part No.552217), galvanised, are required for attaching to guard rail tube.	850	42	1150	14,5	552216
	Concreting scaffold end guard rail galvanised	1670	105	1130	18,1	552218
	NOE top adapter end guard rail including spring pin, galvanised	130	60	295	1,7	552217
	FORM-CLIP 6X42 (40X40) Two folded plugs are required per end guard rail, galvanised	42			0,0	555960
	Bolting pin for handrail tube for handrail tube 10601380 H, 1380 GR and 1880 GR, 1600 OD 24 mm				0,8	111402


NOEtop S (purchase only)

	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
	NOEtop S working platforms	2400			183,3	550060
	ready for attaching to formwork	2650			192,8	550061
	panel, metal parts galvanised	2000			168,3	550062
		1325			142,7	550063
		1200			138,0	550064
		750			93,3	550066
		600			53,6	550068
		450			48,0	550070
	NOEtop S front guard rails	2400	85	1325	20,6	550130
	for use on working platform	2650	85	1325	21,9	550131
	fronts, pre-attached, galvanised	2000	85	1325	18,5	550132
		1325	85	1325	14,8	550133
		1200	85	1325	14,2	550134
		750	85	1325	11,8	550136
		600	85	1325	7,1	550138
		450	85	1325	6,3	550140
	NOEtop S clamping shoe for attaching the NOEtop S working platform to the formwork panel, galvanised	270	145	720	9,5	550143
	LSS ladder 2800		450	1015	2,7	126764
	incl. Ribbed plugs aluminium		450	1855	4,9	126763
			450	2415	6,3	126762
			450	2695	7,0	126761
			450	2975	7,7	126760
	NOEtop S ladder support with step galvanised	850	150	266	9,4	550023
	NOEtop S buffer support for secure support in folded-up state	200	60	315	5,4	550142


	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
	NOEtop S compensation platform individual bracket for compensation panel				39,6	550080
	NOEtop S round steel link chain round steel link chain in acc. with DIN 5685 D = 3.5 - 28	470			0,2	555950
	NOEtop S ring bolt M 6 x 40 galvanised				0,0	555940
	NOEtop S front guard rails Gen.2	2400	85			550530
	for use on working platform	1250	85			550531
	fronts, pre-assembled, galvanised	750	85			550532
		450	85			550504
	NOEtop S clamping shoe Gen.2 for assembly of the NOEtop S working platform to the formwork panel, galvanised					550145
	NOEtop S formwork spindle Gen.2 for aligning formwork					550148
	NOEtop S support tube Gen.2					550147
	NOEtop S ladder extension Gen.2				6,1	550175

NOEtop support bracket


	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
	Bracing			2640	74,0	541024
	bracing offset 32 mm, galvanised			3300	92,0	541025
	Bracing			2640	74,5	541034
	bracing offset 40 mm, galvanised hire only			3300	95,0	541035
	Pin for tying support and head support NOEtop support bracket, galvanised				0,8	541053
	Head support galvanised, connection to the strut requires 1 pin, Part No. 541053 and 1 spring pin Part No. 913305				5,2	541036
	Spring pin Ø 5 mm galvanised				0,0	913305
	Strut	2400-			56,0	541039
	ext. length 2.40-3.70 m, galvanised	3700				
	Strut	2400-			40,0	541044
	ext. length 2.40-2.70 m, galvanised	2700				

	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
	Supporting plate each supporting plate requires: 1 bolt M 16x70 (Part No. 313800) and 1 screw base (Part No. 117240)				4,7	541041
	Bracing U 80 2500 mm long, painted	2500			55,0	543030
	Bolt M 16x70 with nut and washer, galvanised Hire only! For purchase see price list for formwork and scaffold accessories.				0,2	313800
	Screw base for tie-rod Ø 15 mm, hole Ø 17 mm, weldable, permissible. tensile load 70 kN				0,4	117240
	Tie rod Ø 15 mm capped, galvanised	2000			2,8	672000
	Sprint nut galvanised	80	80	60	0,7	680580
	Tying support additionally required: 1 pin, part no. 541053 and 1 Spring pin Ø 5 mm, part no. 913305; galvanized.				6,0	541052
	Strut connection head bearing The strut connection allows to the head bearing of the light support frame. Supports such as NOEprop, ADS and BKS. The supports can be inclined up to 20 ° to the vertical formwork.	190	190	142	3,8	541060


Anchor Ø 15 mm


	Description	Length mm	Width mm	Ø mm	Weight approx. kg	Part No.
	Waved anchor Ø 15 mm	550		15,0	0,9	542007
	Anchor Ø 15 mm	450		15,0	1,1	542005
	Anchor loop Ø 15 mm	340	230	15,0	2,2	542006
	Anchor support for smooth cone packing unit 40 pieces			15,0	20,0	541991
				20,0	20,0	541992
				26,5	20,0	541993
	Smooth cone Ø 15 mm red Ø 15.0 mm = red Packing unit 40 pieces			15,0	2,8	541994
	Stripping tool smooth cone	25	25		0,3	541998

NOE foundation ties

	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
	Tying claw a method of connecting over the top of the panel if not using the tie rod holes, galvanised				1,4	137500
	Foundation clamp for use with perforated steel strap, galvanised				1,5	137297
	NOEtop fixing claw					136701
	Perforated steel strap permissible tensile load 16 kN supplied in 50-m rolls				24,0	108031
	Dispensing and cutting trolley for efficient cutting and transporting of NOE perforated steel strap. The trolley has a clamping and cutting device for accurately, simply and safely cutting the strap to length.				21,8	108030

Accessories for special tasks

	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
	NOEtop EinsA Fixlager Support plate on the positioning side of the formwork, use with large panels NOEtop with integrated reinforcement, allows unilateral clamping with Schwupp tension rod $\varnothing$ 15mm, galvanized	168	120		2,7	680045
	NOE EinsA magnetic bearings Magnetization / grade N35 NiCuNi coating Holding force approx. 35 kg Max. Operating temperature 80 ° C	182	119	133	2,8	680060
	NOEtop EinsA Distance compensation				0,8	680052
	Tying plate for integral bracing and attached bracing, galvanised				3,0	164040
	Hammer-head bolt with handle Integrated Sprint nut 330 mm long, clamp length 205 mm, permissible tensile load = 18.8 kN, galvanised	205			1,2	319339
	Hammer-head bolt with handle integrated Sprint nut 230 mm long, clamp length 125 mm, permissible tensile load =18.8 kN, galvanised	125			1,2	319338
	Hammer-head bolt with handle KL 230		230		1,3	319343




	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
	Waling plate for hammer-head bolt 319343	180	120	10	1,6	319350
	Bolt M 18x160 with nut and 4 washers, galvanised Hire only! For purchase see price list for formwork and scaffold accessories.				0,5	318900
	Bolt M 18x100 With nut and 3 washers, galvanised Hire only! For purchase see price list for formwork and scaffold accessories.				0,4	318801
	NOEtop Connection screw 250 with tie-rod thread DW 15 mm, length 280 mm, thread length 250 mm, galvanised	285			0,5	135019
	Waling plate 80 X 55 mm, 20 mm thick, hole 24 mm, galvanised	80	55		0,6	691500
	Tilt restraint for tie rod purchase only				0,3	919036
	NOEstep for easier use of the formwork, step surface 300x335 mm, max. fitting height 1000 mm above ground, max. load 100 kg, galvanised purchase only				5,5	137570
	NOEtop stop-end support for Ø 15 mm tie rods, galvanised				0,7	164032
	NOEtop stop-end support for Ø 15 mm tie rods, galvanised				2,1	164036
	Stop-end clamp Usable up to a wall thickness of 365 mm, galvanised, for hire only				9,9	137830

Transport aids


	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
	Crane hook for NOEtop profile, with suspension chain, load 2000 kg for vertical tension, for use see operating instructions, galvanised				6,4	135905
	NOE transport hanger for NOEtop load 2000 kg				12,8	922910
	Quadruple sling ropes L = 4000 mm, P = 15 kN/strand				12,0	922900
	Lifting pin with trap. Moving single panels requires 4 lifting pins, P = 5 kN, galvanised				0,7	136808
	Anti-slip mat plastic recycles	120	120	6	0,1	990152
	Plastic storage washer II for non-displaceable stacking and storage of NOEtop/NOE Top 2000 panels				0,0	919070
	NOEbox 1180 X 780 mm, for transporting small items, galvanised	800	1180	780	78,0	697598

	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
	NOEcase 1200 x 800 mm Crane-type mesh box for transporting parts Load capacity: 1000 kg Load: 6000 kg Number of storage containers in the stack: max. 6 pieces galvanized	800	1200	1016	85,4	697591

NOE Plugs

	Description	Ø mm	Length mm	Height mm	Weight approx. kg	Part No.
	PVC plastic plugs SFL 30 for hole Ø 26 mm, to seal tie rod holes in NOEtop, NOE Top 2000 panels, NOE circular formwork panels, domed head, Ø 30 mm, colour white, packaging unit 250 No.	30,0		12	0,6	693409
	PVC plastic plugs SFL 30 with NOE-logo for hole Ø 26 mm, to seal tie rod holes in NOEtop, NOE Top 2000 panels, NOE circular formwork panels, domed head, Ø 30 mm, colour white, with NOE-logo packaging unit 250 No.	30,0			0,6	693515
	PVC plastic plugs ST 26 for hole Ø 26 mm, to seal tie rod holes in external corner panels of NOEtop and NOE Top Alu, conical, without head, colour light grey, packaging unit 60 No.	26,0		21,7	0,3	693620
	PVC plastic plugs SFL 23 for hole Ø 20 mm, to seal tie rod holes in NOEtop 60, NOE SL 2000 (panel height 1500 and 750 mm, upper row of holes), NOE Alu 2000, NOEtop Alu, NOEalu L (only for panels Part No. beginning with 4022., 4023.), with slats, domed head, Ø 23 mm, colour white packaging unit 250 No.	23,0		11	0,3	693900

NOEalu XL panels, with NOEform facing

	Description	Width mm	Height mm	Surface m ²	Weight approx. kg	Part No.
	NOEalu XLS panels with 15 mm NOEform facing	2000	2750	5,50	174,6	402443

NOEalu L panels, with NOEform facing

	Description	Width mm	Height mm	Surface m ²	Weight approx. kg	Part No.
	NOEalu L panels 2750 mm high with 15 mm NOEform facing	900	2750	2,48	54,2	402400
		750	2750	2,06	47,1	402402
		600	2750	1,65	40,0	402403
		550	2750	1,51	37,6	402404
		500	2750	1,38	35,2	402406
		450	2750	1,24	32,8	402408
		400	2750	1,10	30,5	402410
		300	2750	0,83	25,7	402412
	NOEalu L panels 1500 mm high with 15 mm NOEform facing	900	1500	1,35	31,8	402420
		600	1500	0,90	23,3	402421
		750	1500	1,13	27,6	402422
		550	1500	0,82	21,7	402423
		500	1500	0,75	20,5	402424
		450	1500	0,68	19,1	402426
		400	1500	0,60	17,7	402428
		300	1500	0,45	14,8	402430
	NOEalu L panels 1250 mm high with 15 mm NOEform facing	900	1250	1,13	27,5	402436
	NOEalu L panels 900 mm high	900	900	0,81	20,1	402450
	purchase only	750	900	0,67	17,3	402452
	with 15 mm NOEform facing,	600	900	0,54	14,7	402454
		550	900	0,49	13,8	402456
		500	900	0,45	12,9	402458
		450	900	0,40	12,0	402460
		400	900	0,36	11,1	402462
		300	900	0,27	9,4	402464

NOEalu L corner solutions, with NOEform facing





	Description	Width mm	Height mm	Surface m ²	Weight approx. kg	Part No.
	NOEalu L external corner panel	900	2750	2,48	53,8	402418
	for forming external corner and	900	1500	1,35	31,7	402434
	props up to 700x700 mm, with	900	(900)	0,81	20,7	402470
	15 mm NOEform facing (900) = purchase only					
	NOEalu L Wedge bracer galvanised				1,7	402530
	NOEtop Connection screw 250 with tie-rod thread DW 15 mm, length 280 mm, thread length 250 mm, galvanised				0,5	135019
	Waling plate with wing nut bearing area 140x100 mm, galvanised	140			1,4	691700
	NOEalu L External corner	100	2750		14,6	402666
	for clamping to NOEalu L panels,	100	1500		7,5	402664
	100 mm deep, aluminium	100	(900)		5,0	402662
	(900) = purchase only					
	NOEalu L internal corner	300	2750	1,65	41,6	402416
	Aluminium, lined with 15 mm	300	1500	0,90	23,7	402432
	NOEform	300	(900)	0,54	15,5	402468
	(900) = purchase only					
	NOEalu L adjustable internal corner	250	2750	0,69	46,1	402720
		250	1500	0,38	29,4	402724
	Usable as a 65°-180° internal corner with durably elastic, soiling-resistant PU strip in the corner zone, galvanised	250	900		23,0	402276

	Description	Width mm	Height mm	Surface m ²	Weight approx. kg	Part No.
	NOEalu L adjustable external corner	174	900		15,3	402313
	Usable as a 65°-180° external corner with durably elastic, soiling-resistant PU strip in the corner zone, galvanised	174	2750	0,48	38,3	402722
		174	1500	0,26	18,8	402726

Longitudinal compensation


	Description	Width mm	Height mm	Surface m ²	Weight approx. kg	Part No.
	Compensation channel 410 mm long, galvanised				9,4	135109
	Extension channel 1000 mm long, GR 35, for aligning formwork at compensation panels and timber compensation pieces, galvanised				15,5	135208
	Alignment channel 1425 mm long, galvanised				21,5	135210




NOEalu L Clamps



	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
	NOE Alulock for infinitely adjustable compensation piece up to 100 mm as well as horizontal and vertical panel connection, permissible tensile load 10 kN				3,4	402512 402525
	NOEalu L Crane hook For NOEalu L profile, with suspension chain, load 1000 kg for vertical tension, for use see operating instructions, galvanised	130	153	415	4,1	402621
	NOEalu L Crane hook Hire only!	130	153	220	3,8	402620
	Adjustable wedge clamp for infinitely adjustable compensation piece up to 250 mm, galvanised, for hire only, not for purchase				4,4	106445
	NOEalu L / NOEtop R 275 adapter clamp For connecting NOEalu L formwork with NOEtop R 275 circular formwork compensation up to 40 mm				5,0	402527
	Adjustment clamp NOEtop / NOEalu L for connecting NOEalu L / NOEtop panels, galvanised				4,3	402526

Concreting scaffold


	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
	NOEalu L walkway bracket Used as formwork scaffold for hanging off panels, max. stair width 750 mm, each walkway bracket requires 1 guard rail tube, Part No. 111400, without nail core, galvanised		750		13,6	552202
	Light walkway bracket Used as formwork scaffold for hanging off panels, max. stair width 750 mm, nailing strip, galvanised Hire only		750		8,7	552207
	Nailing core for walkway brackets made from recycled plastic	750	40	40	1,0	556003
	NOEalu L overfall guard galvanised for handrail tube 1600 (part no. 111401)				4,0	553212
	Handrail tube 1380 H 1380 mm high, tube Ø 33.7 mm, galvanised			1380	5,0	111403
	Handrail tube 1060 1060 mm high, tube Ø 33.7 mm, galvanised **hire only **			1060	4,0	111400
	Guard rail tube 1380 GR 2 wedges (Part No. 507012) are required per guard rail tube, galvanised used with CS frame grillage	150	50	1380	5,8	507010

	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
	Guardrail post tube 1600 1600 mm high, for guardrail holder Ø 33.7 mm, galvanised			1600	8,2	111401
	Wedge for guard rail tube GR	230	15	52	0,3	507012
	NOEsafe protective grille 2600 can be used with the railing tube part no. 507024	2600	1210	1500	19,8	507040
	NOEsafe frame grid box Capacity max. 60 protective grids Stacking height max. 2 units, galvanised	1335	1200	1200	83,0	507042
	NOEsafe railing tube 1450mm		1450		4,3	507024
	NOEsafe railing bracket galvanised	175	125	150	1,3	507020
	NOEsafe grille holder fitted	100	50	112	0,4	507029



	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
	Bolt MMS-plus 16X130 SSK Package of 10 pieces purchase only				2,4	313151
	NOE anchor cap D 15 Polyamide, FMFA approved, for tie rod Ø 15 mm Packaging Unit: 50 pieces				3,4	694901
						
	NOEtop Connection bolt 100 thread length 100 mm, galvanised				0,3	135010
	CS frame grillage 2556 used with guard rail tube 1380 GR (Part No. 507010) and guard rail tube 1880 GR (Part No.507011)	2556	25	1150	17,0	507045
	CS frame grillage 1256 used with guard rail tube 1380 GR (Part No. 507010) and guard rail tube 1880 GR (Part No. 507011)	1256	25	1150	9,0	507047
	CS Barrier box capacity max. 40 frame grille, Setting grid box can be dismantled, Stacking height max. 4 pieces,galvanised				97,0	507048
	LG-W 200 plug 9 mm galvanized				0,1	890834

	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
	NOEalu L Aluminium platform with hatch for laying on walkway bracket, antislip embossed plywood, aluminum frame for Alu XLS panels in conjunction with 2x walkway bracket 552202	2000	650		6,3	402710
	LSS ladder 2800		450	1015	2,7	126764
	incl. Ribbed plugs aluminium		450	1855	4,9	126763
			450	2415	6,3	126762
			450	2695	7,0	126761
			450	2975	7,7	126760
	Ladder support with step for NOEtop and NOEalu L scaffold platforms, steel, galvanised For connection, a hammer-head bolt with handle 319338 is required				8,3	550024
	NOEalu L end guard rail galvanised	850	42	1250	12,7	553213
	FORM-CLIP 6X42 (40X40) Two folded plugs are required per end guard rail, galvanised	42			0,0	555960

Accessories for special tasks


	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
	NOEalu L Tying claw galvanised				0,5	402540
	NOEalu L Foundation clamp for use with perforated steel strap, galvanised				1,1	402500
	Perforated steel strap permissible tensile load 16 kN supplied in 50-m rolls				24,0	108031
	Dispensing and cutting trolley for efficient cutting and transporting of NOE perforated steel strap. The trolley has a clamping and cutting device for accurately, simply and safely cutting the strap to length.				21,8	108030
	NOEalu L fixing claw					402502

NOE Plugs

	Description	Ø mm	Length mm	Height mm	Weight approx. kg	Part No.
	PVC plastic plugs SFL 25 for hole Ø 22 mm, to seal tie rod holes in NOElight, NOE SL, NOE SL 2000, NOEalu L (only for panels Part No. beginning with 4024..), and holes in external corner panels of NOE Top 2000, NOEtop 2000 light and NOE SL 2000, colour grey, packaging unit 250 No.	25,0		11,5	0,5	693500
	PVC plastic plugs SFL 32 for hole Ø 28 mm, to seal tie rod holes in external corner panels of NOElight, NOEalu L and NOE Alu 2000, with fins, domed head, colour corn-yellow, packing unit 250 No.	32,0		12	0,8	693408

Tie rod Ø 15 mm

Rods, core Ø 15 mm, external Ø 17 mm, permissible tensile load 90 kN (in acc. with DIN 18216).

	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
	Tie rod Ø 15 mm capped, galvanised	950			1,4	670950
	Waling plate with wing nut bearing area 140x100 mm, galvanised	100	140		1,4	691700
	Sprint nut galvanised	80	80	60	0,7	680580
	Hexagonal nut 60 with standard tie rod internal thread galvanised	60			0,3	681000
	Hexagonal nut 30 with standard tie rod internal thread galvanised	30			0,1	680900
	Waterstop Ø 65 mm, permissible tensile force 90 kN Each waterstop requires 2 waterstop connection couplers, Part No. 682203	112			0,6	682202
	Waterstop coupler 2 pieces are required per waterstop coupler material PE				0,0	682203


Transport aids

	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
	NOEbox 1180 X 780 mm, for transporting small items, galvanised	800	1180	780	78,0	697598
	NOEcase 1200 x 800 mm Crane-type mesh box for transporting parts Load capacity: 1000 kg Load: 6000 kg Number of storage containers in the stack: max. 6 pieces galvanized	800	1200	1016	85,4	697591

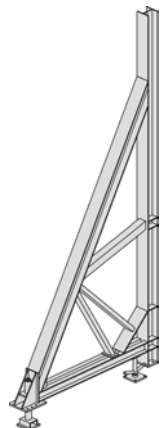

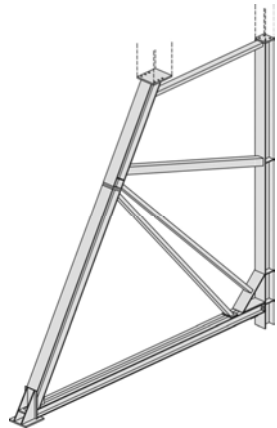
NOE HBF support bracket




	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
	NOE HBF end piece galvanised			1500	74,9	540905
	NOE HBF standard galvanised			3950	466,3	540900
	NOE HBF extension 1 galvanised			2105	370,6	540910
	NOE HBF extension 2 galvanised			2095	480,8	540915


NOE HBF accessories

	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
	NOE HBF spindle front spindle travel 110-305 mm, galvanised 1 NOE HBF connection bolt (Part No. 540928) is required				13,1	540920
	NOE HBF spindle rear spindle travel 105-275 mm, galvanised				30,9	540922
	NOE HBF connection bolt Ø 45 mm, for each strut, end piece and extension one bolt is required, galvanised				0,4	540928
	NOE support bracket bracing 2250 2250 mm, galvanised	2500			137,4	541029
	Hammer-head bolt 380 mm long, clamp length 320 mm, permissible tensile load 18.8 kN, galvanised	380			0,6	319315



NOE support bracket heavy-duty

	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
	Support bracket extension 2 bolts with nut and washer M 16x50 8.8 (Part No. 313500) are required for assembly, painted			500	21,6	541020
	Support bracket incl. spindles, painted			3650	282,0	541000
	Support bracket extension without spindles, spindles from the support bracket, Part No. 541000, can be used, 10 bolts with nut and washer M 16x50 8.8 (Part No. 313500) are required for assembly, painted			1600	211,4	541010
	Support bracket extension large 2-part, without spindle, spindles from the support bracket, Part No. 541000) can be used. The following items are required for assembly: 22 bolts with nut and washer M 16x50 8.8 (Part No. 313500) and 6 conical washers M 16 (Part No. 389011), painted.			3180	391,4	541011
	Support for walkway bracket galvanised				4,4	543060

	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
	Bolt M 16x50 8.8 with nut and washer, galvanised Hire only! For purchase see price list for formwork and scaffold accessories.				0,1	313500
	NOE support bracket bracing 2250 2250 mm, galvanised	2500			137,4	541029
	bracing U 160 galvanised Hire only	2250			107,0	541030
	Connection bow for fastening of NOEtop panels fastened to the hat profile by hammer- head bolt with handle (Part No. 319338), fastened to the Z profile with bolt M 16x30 (Part No. 313200) and washer (Part No. 314600), painted				3,8	541033
	Hammer-head bolt with handle integrated Sprint nut 230 mm long, clamp length 125 mm, permissible tensile load =18.8 kN, galvanised	125			1,2	319338
	Hammer-head bolt with handle KL 230		230		1,3	319343
	Waling plate for hammer-head bolt 319343	180	120	10	1,6	319350
 	Bolt M 16x30 with nut and washer, galvanised Hire only! For purchase see price list for formwork and scaffold accessories.				0,1	313200
	Spacer washer for M 16 Ø 56 mm, hole Ø 17, mm, 5 mm thick, DIN 440, galvanised Hire only! For purchase see price list for formwork and scaffold accessories.				0,0	314600

	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
	Clamp plate for fastening NOE Combi 20 girder, 1 bolt M 16x40 (Part No. 313400) with nut and washer, galvanised, is required				0,4	541190
	wedge disk M16 DIN 435 galvanised					389011
	Bolt M 16x40 with nut and washer, galvanised Hire only! For purchase see price list for formwork and scaffold accessories.				0,1	313400
	Spindle Tr 60/9 single, painted	150	150	480	14,0	541050
	Spindle M 36 single, painted	150	150	295	6,0	541040


Internal corner construction

	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
	Corner bracing painted	606	606		29,1	541031
	Bracing galvanised	500			34,6	541032
	Compensation channel 410 mm long, galvanised	410			9,4	135109



	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
	Screw base for tie-rod Ø 15 mm, hole Ø 17 mm, weldable, permissible. tensile load 70 kN				0,4	117240
	Bolt M 16x70 with nut and washer, galvanised Hire only! For purchase see price list for formwork and scaffold accessories.				0,2	313800
	Hammer-head bolt with handle Integrated Sprint nut 330 mm long, clamp length 205 mm, permissible tensile load = 18.8 kN, galvanised	205			1,2	319339
	Tie rod Ø 15 mm capped, galvanised	300			0,4	670300
	Hammer-head bolt 380 mm long, clamp length 320 mm, permissible tensile load 18.8 kN, galvanised	380			0,6	319315
	Hammer-head bolt with handle KL 230		230		1,3	319343
	Waling plate for hammer-head bolt 319343	180	120	10	1,6	319350
	Sprint nut galvanised	80	80	60	0,7	680580

NOEtop support bracket

	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
	Bracing			2640	74,0	541024
	bracing offset 32 mm, galvanised			3300	92,0	541025
	Bracing			2640	74,5	541034
	bracing offset 40 mm, galvanised hire only			3300	95,0	541035
	Head support galvanised, connection to the strut requires 1 pin, Part No. 541053 and 1 spring pin Part No. 913305				5,2	541036
	Strut	2400-			56,0	541039
	ext. length 2.40-3.70 m, galvanised	3700				
	Strut	2400-			40,0	541044
	ext. length 2.40-2.70 m, galvanised	2700				



	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
	Supporting plate each supporting plate requires: 1 bolt M 16x70 (Part No. 313800) and 1 screw base (Part No. 117240)				4,7	541041
	Bracing U 80 2500 mm long, painted	2500			55,0	543030
	Bolt M 16x70 with nut and washer, galvanised Hire only! For purchase see price list for formwork and scaffold accessories.				0,2	313800
	Screw base for tie-rod Ø 15 mm, hole Ø 17 mm, weldable, permissible. tensile load 70 kN				0,4	117240
	Tie rod Ø 15 mm capped, galvanised	2000			2,8	672000
	Sprint nut galvanised	80	80	60	0,7	680580
	Tying support additionally required: 1 pin, part no. 541053 and 1 Spring pin Ø 5 mm, part no. 913305; galvanized.				6,0	541052
	Pin for tying support and head support NOEtop support bracket, galvanised				0,8	541053
	Spring pin Ø 5 mm galvanised				0,0	913305
	Shelf bracket 68cm assembled with foot sprint	510	200	686	9,0	530031
	Double headed earth nail 25 x 400 mm	476	50	50	2,0	530032

Anchor Ø 15 mm

	Description	Length mm	Width mm	Ø mm	Weight approx. kg	Part No.
	Anchoring support packing unit 50 pieces			15,0	20,0	542011
	Anchor support for smooth cone packing unit 40 pieces			15,0	20,0	541991
	Smooth cone Ø 15 mm red Ø 15.0 mm = red Packing unit 40 pieces			15,0	2,8	541994
	Stripping tool smooth cone	25	25		0,3	541998
	Sprint nut galvanised	80	80		0,7	680580
	Waling plate with wing nut bearing area 140x100 mm, galvanised	100	140		1,4	691700
	Waling plate pressed, hole Ø 20 mm, galvanised	100	140		0,9	691800
	Tie rod Ø 15 mm capped, galvanised	950		15,0	1,4	670950
	Tie rod coupler nut Ø 15 mm A/F size 30, permissible tensile force 90 kN, galvanised	105			0,5	684000
	Waved anchor Ø 15 mm	550		15,0	0,9	542007
	Anchor Ø 15 mm	450		15,0	1,1	542005
	Anchor loop Ø 15 mm	340	230	15,0	2,2	542006
	Rock bolt Ø 15 for subsequent set of anchorages in concrete			15,0	0,4	541092

Support bracket anchor Ø 20 mm

Permissible load 160 kN

	Description	Length mm	Width mm	Ø mm	Weight approx. kg	Part No.
	Anchoring support packing unit 40 pieces			20,0	16,0	542012
	Anchor support for smooth cone packing unit 40 pieces			20,0	20,0	541992
	Smooth cone Ø 20 mm yellow Ø 20.0 mm = yellow Packing unit 40 pieces			20,0	2,8	541995
	Stripping tool smooth cone	25	25		0,3	541998
	Tying nut Ø 20 mm Galvanised				0,5	680009
	Waling plate Ø 20 mm P = 160 kN, smooth bearing area, galvanised	150	100		2,2	691519
	Waling plate with wing nut galvanised	140	110		1,1	691600
	Round calotte plate DW20, D130 mm			130,0	1,8	691601
	Coupler nut Ø 20 mm, SW 36, permissible tensile load 160 kN	140			0,7	682220
	Tie rod Ø 20 mm galvanised	950		20,0	2,4	670959
	Waved anchor Ø 20 mm	700		20,0	2,0	542008
	Support bracket Anchor loop Ø 20 mm					542014

Anchor Ø 26.5 mm

	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
	Anchoring support packing unit 40 pieces				16,0	542013
	Anchor support for smooth cone packing unit 40 pieces				20,0	541993
	Smooth cone Ø 26.5 mm white Ø 26.5 mm = white Packing unit 40 pieces				2,8	541996
	Stripping tool smooth cone	25	25	400	0,3	541998
	Tie rod Ø 26.5 mm galvanised	950			4,3	660951
	Waved anchor Ø 26.5 mm 220 kN/rod end, galvanised	800			3,6	542009
	Anchor loop Ø 26.5 mm 280 kN/rod end, galvanised	800			8,7	542010
	Tie rod coupler nut Ø 26.5 mm with tie rod thread, SW 46, load 300 kN, galvanised	150			1,4	682230
	Tying nut Ø 26.5 mm load 260 kN, galvanised				0,9	680010
	Waling plate bearing area 150x150 mm, hole Ø 32 mm, load 300 kN	150	150	35	5,7	691510

Associated products

	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
	Coupler 48/48 EN 74-1, swivelling, galvanized				1,3	510300
	Coupler 48/48 rigid EN 74-1, rigid, galvanized				1,3	510310
	Bolted coupler 48/M 16 EN 74-2, galvanized				0,8	514200
	Scaffold tube	6000			30,4	506000
	48.3 X 3.25 mm, DIN EN 39,	5500			24,2	505500
	galvanised	5000			22,0	505000
		4500			19,8	504500
		4000			17,6	504000
		3500			15,4	503500
		3000			13,2	503000
		2500			11,0	502500
		2000			8,8	502000
		1500			6,6	501500
		1000			4,4	501000

NOE stabilizers and push-pull braces

Description	Length mm	Width mm	Height mm	Weight kg / m ²	Part No.
-------------	--------------	-------------	--------------	-------------------------------	----------

Stabilizers and push-pull braces NOEtop

Individual parts

Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
 NOEtop stabilizer connector galvanised				3,0	697032
 Hinge Ø 60 mm for fastening to the formwork, each panel requires a hammer- head bolt with handle.				0,8	697012
 Push/pull brace Push/pull 2.77- 5.00 m ext. length 2770-5000 mm load: 29.5-6.1 kN	2770- 5000			25,7	697028
 Push/pull brace Push/pull 2.10- 3.65 m ext. length 2100-3650 load: 19.7- 6.3 kN	2100- 3650			19,1	697027
 Push/pull brace Push/pull 1.00- 1.51 m ext. length 1000-1510 mm load: 19.7 kN	1000- 1510			9,4	697026

	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
	Raking prop 6.40-10.30 m ext. length 6400-10300 mm load: 10300 30-13.5 kN galvanised	6400-			102,0	697036
	Push-pull prop 5.00-7.50 m Extension 5000- 7500 mm Load: 20-11.1 kN	5000- 7500			60,8	697133
	Bottom bearing stabilizer AB 300 galvanised				4,6	557246
	Supporting plate for push/pull brace/raking props/stabilizers				3,8	697014
	L-pin Ø 16 yellow passivated galvanised				0,3	697010
	Spring pin Ø 4 mm galvanised				0,0	913304
	Hammer-head bolt with handle integrated Sprint nut 230 mm long, clamp length 125 mm, permissible tensile load =18.8 kN, galvanised	125			1,2	319338
	Hammer-head bolt with handle KL 230		230		1,3	319343
	Waling plate for hammer-head bolt 319343	180	120	10	1,6	319350
	Pallet for deck props load 1750 kg, galvanised	835	1520	1020	64,0	697599

	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
	NOEtop4 Safety Bolt For heavy-duty attachment of stabilisers and alignment rails to NOEtop4. 1 L-pin, part no. 697010 + 1 spring pin, part no. 913304 required for securing. galvanised	310			0,7	850014

Stabilizer NOEalu L

Individual parts


	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
	Hinge Ø 60 mm for fastening to the formwork, each panel requires a hammer- head bolt with handle.				0,8	697012
	Prop push/pull 1.75-3.10 m Load capacity: 15-8 KN, galvanised	1750- 3100			17,2	697044
	Prop push/pull 1.00-1.20 m ext. length 1000-1200 mm, Load capacity: 15 KN galvanised	1000- 1200			8,4	697045
	Supporting plate for push/pull brace/raking props/stabilizers				3,8	697014
	L-pin Ø 16 yellow passivated galvanised				0,3	697010
	Spring pin Ø 4 mm galvanised				0,0	913304

RSK stabilizers

Individual parts

	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
	NOEtop stabilizer connector galvanised				3,0	697032
	Hinge Ø 60 mm for fastening to the formwork, each panel requires a hammer- head bolt with handle.				0,8	697012
	Strut RSK 8 ext. length 6.20-7.60 m, load: 38-21.2 kN				69,0	697146
	Strut RSK 6 ext. length 4.60-6.00 m, load: 24.6-12.8 kN				35,0	697145
	Supporting plate for push/pull brace/raking props/stabilizers				3,8	697014
	L-pin Ø 16 yellow passivated galvanized				0,3	697010
	Spring pin Ø 4 mm galvanised				0,0	913304


BKS supports

	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
	Spindle ext. length 1150-1850 mm, incl. foot element (for fastening 4 No. M16x70 Part No. 313800)			1150- 1850	50,0	697130
	intermediate piece 600 per butt joint 4 No. bolts M 16x70 (Part No. 313800)			600	27,7	697136
	Spacer block 2400 per butt joint 4 No. bolts M 16x70 (Part No. 313800)			2400	49,4	697138
	Spacer block 3700 per butt joint 4 No. bolts M 16x70 (Part No. 313800)			3700	71,3	697140
	Head plates hinge end joint for fastening 4 No. M 16x70 (Part No. 313800)			175	10,4	697132
	Combi 20 hinge end joint fastening to the panel requires 2 hammer-head bolts Part No. 319338, painted				19,0	540210
	Coupler piece for BKS stabilizer purchase only				6,3	697134
	Bolt M 16x70 with nut and washer, galvanised Hire only! For purchase see price list for formwork and scaffold accessories.				0,2	313800
	Hammer-head bolt with handle integrated Sprint nut 230 mm long, clamp length 125 mm, permissible tensile load =18.8 kN, galvanised	125			1,2	319338

	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
	Hammer-head bolt with handle KL 230		230		1,3	319343
	Waling plate for hammer-head bolt 319343	180	120	10	1,6	319350
	Strut connection head bearing The strut connection allows to the head bearing of the light support frame. Supports such as NOEprop, ADS and BKS. The supports can be inclined up to 20 ° to the vertical formwork.	190	190	142	3,8	541060
	Head support galvanised, connection to the strut requires 1 pin, Part No. 541053 and 1 spring pin Part No. 913305				5,2	541036

NOEtop R 275 circular formwork

Completely assembled out of galvanised steel parts, with NOEform facing fitted. Radii infinitely adjustable, from 2750 mm. Initial radius set at factory. The radius set at the factory must be checked by site staff and readjusted if necessary. A wooden template for the internal or external radius is required for this.




	Description	Width mm	Height mm	Surface m ²	Weight approx. kg	Part No.
	External unit	2500	3000	7,50	545,6	351000
	With 21 mm NOEform facing,	2500	1500	3,75	341,8	351010
	smallest adjustable radius 4000 mm	2500	750	1,88	220,8	351020
	External unit	1270	3000	3,81	335,1	351030
	With 18 mm NOEform facing	1270	1500	1,91	209,6	351040
		1270	750	0,95	115,7	351050
	Internal unit	2380	3000	7,14	542,0	351100
	with 21 mm NOEform facing;	2380	1500	3,57	339,4	351110
	smallest adjustable radius 4000 mm	2380	750	1,79	219,6	351120
	Internal unit	1230	3000	3,69	334,1	351130
	With 18 mm NOEform facing	1230	1500	1,85	209,2	351140
		1230	750	0,92	115,5	351150

Wooden template


purchase only

	Description	Length mm	Width mm	Surface m ²	Weight approx. kg	Part No.
	Wooden template for external radius With NOEtop R 275 and NOE R 250, please inform us of the radius when ordering.				7,0	352221
	Wooden gauge for internal radius With NOEtop R 275 and NOE R 250, please inform us of the radius when ordering.				7,0	352220

NOEtop clamps

	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
	NOE Toplock for panel connections and longitudinal compensations up to 42 mm, permissible tensile load 15 kN, galvanised				3,7	137976
	Top Adjustable lock for infinitely adjustable compensation piece 0-135 mm, permissible tensile load 20 kN, galvanised, hire only				5,2	137985
	Adapter NOE Toplock for connection of NOE R 110 and NOEtop R 275 panels, length adjustment up to 42 mm, galvanized				4,4	137978
	NOE Toplock adapter NOEtop R 275 / NOE R 250 clamps to connect NOEtop R 275 and NOE R 250 circular formwork				4,4	137977
	NOEalu L / NOEtop R 275 adapter clamp For connecting NOEalu L formwork with NOEtop R 275 circular formwork compensation up to 40 mm				5,0	402527
	NOE Toplock X				4,3	137960

NOEtop R 275 extensions


	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
	NOEtop R 275 extension clamp For NOEtop R 275 circular formwork galvanised				10,5	352210
	NOEtop R 275 extension bar For extensions up to 250 mm requires 2 bolts M 16x30 (Part No. 313200)				3,2	352212
	Bolt M 16x30 with nut and washer, galvanised Hire only! For purchase see price list for formwork and scaffold accessories.				0,1	313200
	Extension clamp for on-site extensions using formwork boards up to max. 200 mm, galvanised Can not be used with crane hook. Instead use 2x ring bolts M 16 (821110), 2x safety nuts M 16 (373013) and spacer washer for M 16 (314600).				3,2	137850

Stop-end form


	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
	Stop-end support with fastening screw and screw base, each stop-end support requires 1 tie rod and 1 waling plate with wing nut				1,9	350390
	Alignment channel 1425 mm long, galvanised	1425			21,5	135210
	Spreader bar galvanised	750			23,0	350330

Tie rod Ø 15 mm

Rods, core Ø 15 mm, external Ø 17 mm, permissible tensile load 90 kN (in acc. with DIN 18216).





	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
	Waling plate with wing nut bearing area 140x100 mm, galvanised	100	140		1,4	691700
	Tie rod Ø 15 mm	1500			2,1	671500
	capped, galvanised	300			0,4	670300
	Sprint nut galvanised	80	80	60	0,7	680580
	Compensation channel 410 mm long, galvanised	410			9,4	135109

Scaffold

	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
	Ratio concreting brackets 100 for fastening to NOEtop R 275, NOE R 250 and NOE R 110 circular formwork, stair width 1000 mm, with nailing strip, incl. pin and spring pin, galvanised				15,8	530014
	Handrail tube 1380 H 1380 mm high, tube Ø 33.7 mm, galvanised			1380	5,0	111403
	Handrail tube 1060 1060 mm high, tube Ø 33.7 mm, galvanised **hire only **			1060	4,0	111400
	LG-W 200 plug 9 mm galvanised				0,1	890834

	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
	NOEtop R Klemmhalter				3,5	552215
	allows the attachment of a railing to protect against falling on the opposite side of the formwork, max. railing inclination 14 °, for fixing the railing a fall plug (part-no. 890834) is required, for NOEtop R and NOEtop R275, galvanized					


Components for circular formwork

	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
	NOE Combi 20 girder	2975			29,8	742975
	200x60x4 mm, intermediate	1475			14,9	741475
	dimensions priced as next-longest length, longer lengths on request, galvanised	725			7,3	740725
	Cross waler for external formwork for NOEtop R 275 and NOE R 250, fastened with 2 bolts M 16x30 bolts (313200), galvanised				3,8	350299
	Cross waler for NOEtop R 275 and NOE R 250, fastened with 2 bolts M 16x30 bolts (313200), galvanised				3,1	350300
	Girder end-piece NOEtop/NOE Combi 20, fastening requires 6 bolts M 16x30 (313200), galvanised				7,3	350381
	NOEtop bracket jack galvanised				2,5	350301
	Turnbuckle long, fastened with 2 M 16x100 bolts (314000), galvanised	412-530			1,6	350310
	Turnbuckle medium, fastened with 2 M 16x100 bolts (314000), galvanised	312-430			1,4	350315
	Turnbuckle short, fastened with 2 M 16x100 bolts (314000), galvanised	212-330			1,2	350320
	NOEtop R 275 connection profile galvanised	3000			38,5	350368
		1500			20,0	350369
		750			10,6	350370
	Ring bolt M 16, 1.5T, swivelling 360° swivel, loadable from all sides, load capacity label, spanner with ring bolt permanently attached, labelling of optimum load direction, load capacity: under vertical tension 4000 kg, under 90° load 1500 kg				0,3	821110

	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
	Spacer washer for M 16 Ø 56 mm, hole Ø 17, mm, 5 mm thick, DIN 440, galvanised Hire only! For purchase see price list for formwork and scaffold accessories.				0,0	314600
	Safety nut M 16 DIN 985, 8.0, galvanised, packaging unit 200 No.				6,8	373012
	Crane hook for NOEtop profile, with suspension chain, load 2000 kg for vertical tension, for use see operating instructions, galvanised				6,4	135905
	Bolt M 16x100 with nut and washer, galvanised Hire only! For purchase see price list for formwork and scaffold accessories.				0,2	314000
	Bolt M 16x80 with nut and washer, galvanised Hire only! For purchase see price list for formwork and scaffold accessories.				0,2	313900
 	Bolt M 16x30 with nut and washer, galvanised Hire only! For purchase see price list for formwork and scaffold accessories.				0,1	313200
	Disc bolt M 8x40 for fastening facing, with nut and washer, DIN 15237, galvanised				0,0	310907

	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
 	Base R 275 For stacking units, fastening requires 2 pieces M 16x30 bolts (313200)				2,4	350412
	Reinforcement for base NOEtop R 275 requires 2 bolts M 16x30 (Part No. 313200), galvanised				1,1	350413
	Dehoplast tape 25x3 mm, installed between Combi 20 rail and boarding	1000	25	3	0,1	840520



NOE Plugs

	Description	Ø mm	Length mm	Height mm	Weight approx. kg	Part No.
	PVC plastic plugs SFL 30 for hole Ø 26 mm, to seal tie rod holes in NOEtop, NOE Top 2000 panels, NOE circular formwork panels, domed head, Ø 30 mm, colour white, packaging unit 250 No.	30,0		12	0,6	693409
	PVC plastic plugs SFL 30 with NOE-logo for hole Ø 26 mm, to seal tie rod holes in NOEtop, NOE Top 2000 panels, NOE circular formwork panels, domed head, Ø 30 mm, colour white, with NOE-logo packaging unit 250 No.	30,0			0,6	693515

NOE R 110 circular formwork

Completely assembled out of galvanised or painted steel parts. Facing 2x9 mm NOEform, with NOEplast coating. Radii: from 1100 mm, infinitely adjustable. Initial radius can be set at factory. Important information: The radius set at the factory must be checked by site staff and readjusted if necessary. A wooden template for the internal or external radius is required for this.

To achieve the best concrete results, while avoiding discolouration of the concrete and damage to the formwork, you should oil the NOE R 110 circular formwork with NOE special release agent.

	Description	Width mm	Height mm	Surface m ²	Weight approx. kg	Part No.
	R 110 external unit	711	3000	2,13	206,0	440301
		711	1500	1,08	114,0	440302
		711	750	0,53	58,0	440303
	R 110 internal unit	617	3000	1,85	193,0	440307
		617	1500	0,93	105,0	440308
		617	750	0,46	54,0	440309

Wooden template



purchase only

	Description	Length mm	Width mm	Surface m ²	Weight approx. kg	Part No.
	Wooden template for external radius NOE R 110 Please inform us of the radius when ordering.				2,5	352223
	Wooden template for internal radius NOE R 110 Please inform us of the radius when ordering.				2,5	352222

Release agent

	Description	Content litre	Width mm	Height mm	Weight approx. kg	Part No.
	NOE special release agent	200			193,4	569710
	stripping agent, ideal for	30			27,5	569720
	NOEplast and NOEliner structural matrices or for plastic formwork, e.g. NOE R 110 circular formwork	5			4,6	569730

NOE R 110 element connection

	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
	Wedge plate for the quick connection of individual elements, galvanised				0,6	102520
	Wedge lock for longitudinal compensation of 0-140 mm, galvanised				4,3	350000
	Wing head bolt tie rod thread, 200 mm long, clamp length 160 mm, galvanised	200			0,4	135009
	Hexagonal nut 30 with standard tie rod internal thread galvanised	30			0,1	680900
	Adapter NOE Toplock for connection of NOE R 110 and NOEtop R 275 panels, length adjustment up to 42 mm, galvanized				4,4	137978

Stop-end form


	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
	Stop-end support with fastening screw and screw base, each stop-end support requires 1 tie rod and 1 waling plate with wing nut				1,9	350390
	Alignment channel 1425 mm long, galvanised	1425			21,5	135210

Tie rod Ø 15 mm


Rods, core Ø 15 mm, external Ø 17 mm, permissible tensile load 90 kN (in acc. with DIN 18216).

	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
	Tie rod Ø 15 mm	1500			2,1	671500
	capped, galvanised	300			0,4	670300
	Waling plate with wing nut bearing area 140x100 mm, galvanised	100	140		1,4	691700
	Sprint nut galvanised	80	80	60	0,7	680580
	Compensation channel 410 mm long, galvanised	410			9,4	135109



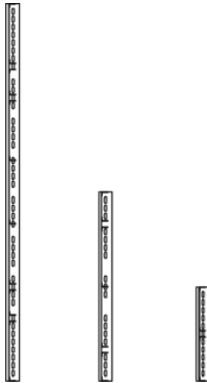
Scaffold

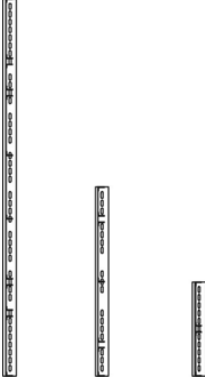

	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
	Ratio concreting brackets 100 for fastening to NOEtop R 275, NOE R 250 and NOE R 110 circular formwork, stair width 1000 mm, with nailing strip, incl. pin and spring pin, galvanised				15,8	530014
	Handrail tube 1380 H 1380 mm high, tube Ø 33.7 mm, galvanised			1380	5,0	111403
	Handrail tube 1060 1060 mm high, tube Ø 33.7 mm, galvanised **hire only **			1060	4,0	111400
	LG-W 200 plug 9 mm galvanised				0,1	890834

NOE Plugs

	Description	Ø mm	Length mm	Height mm	Weight approx. kg	Part No.
	PVC plastic plugs SFL 30 for hole Ø 26 mm, to seal tie rod holes in NOEtop, NOE Top 2000 panels, NOE circular formwork panels, domed head, Ø 30 mm, colour white, packaging unit 250 No.	30,0		12	0,6	693409
	PVC plastic plugs SFL 30 with NOE-logo for hole Ø 26 mm, to seal tie rod holes in NOEtop, NOE Top 2000 panels, NOE circular formwork panels, domed head, Ø 30 mm, colour white, with NOE-logo packaging unit 250 No.	30,0			0,6	693515

Components for circular formwork

	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
	Combi 20 S girder	3000			30,0	743000
	200x60x4 mm, intermediate	1500			15,0	741500
	dimensions priced as next-longest	750			7,5	740750
	length, longer lengths on request, galvanised					
	Cross waler internal unit for R 110 circular formwork, requires 2 bolts M 16x30 (Part No. 313200), galvanised				6,8	350297
	Cross waler external unit for R 110 circular formwork, requires 2 bolts M 16x30 (Part No. 313200), galvanised				10,2	350298
	Turnbuckle long, fastened with 2 M 16x100 bolts (314000), galvanised	412- 530			1,6	350310
	Turnbuckle medium, fastened with 2 M 16x100 bolts (314000), galvanised	312- 430			1,4	350315
	Turnbuckle short, fastened with 2 M 16x100 bolts (314000), galvanised	212- 330			1,2	350320
	Turnbuckle for R 110 internal unit, galvanised	204- 295			1,2	350311
	Connection angle for R 110 circular formwork external	3000			24,3	350365
	formwork units	1500			12,5	350366
	galvanised	750			6,4	350367

	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
	Connection angle for R 110	3000			24,3	350362
	circular formwork Internal	1500			12,5	350363
	formwork units	750			6,4	350364
	galvanised					
	Ring bolt M 16, 1.5T, swivelling 360° swivel, loadable from all sides, load capacity label, spanner with ring bolt permanently attached, labelling of optimum load direction, load capacity: under vertical tension 4000 kg, under 90° load 1500 kg				0,3	821110
	Spacer washer for M 16 Ø 56 mm, hole Ø 17, mm, 5 mm thick, DIN 440, galvanised Hire only! For purchase see price list for formwork and scaffold accessories.				0,0	314600
	Safety nut M 16 DIN 985, 8.0, galvanised, packaging unit 200 No.				6,8	373012
	Combi butt strap for connecting roughly butted Combi 20 girders 6 mm thick, painted	290	165	6	1,8	352200
	Multi-hole C-Profil 100x50x5 mm, multi-hole version, intermediate dimensions priced as next-longest length, longer lengths on request, lacquered	1000			6,4	261000
	Stiffener requires 4 bolts M 16x30 (Part No. 313200), galvanised				2,4	350380

	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
	Bolt M 16x100 with nut and washer, galvanised Hire only! For purchase see price list for formwork and scaffold accessories.				0,2	314000
	Bolt M 16x70 with nut and washer, galvanised Hire only! For purchase see price list for formwork and scaffold accessories.				0,2	313800
 	Bolt M 16x30 with nut and washer, galvanised Hire only! For purchase see price list for formwork and scaffold accessories.				0,1	313200
	Disc bolt M 8x40 for fastening facing, with nut and washer, DIN 15237, galvanised				0,0	310907

NOE R 250 circular formwork

Completely assembled out of galvanised or painted steel parts, with NOEform facing. Radii: infinitely adjustable. With 15 mm NOEform facing. Initial radius can be set at factory.

The radius set at the factory must be checked by site staff and readjusted if necessary. A wooden template for the internal or external radius is required for this.



	Description	Width mm	Height mm	Surface m ²	Weight approx. kg	Part No.
	External unit	2270	3000	6,81	404,0	441501
		2270	1500	3,41	238,0	441502
		2270	750	1,70	135,0	441503
	External unit	1190	3000	3,57	226,0	441504
		1190	1500	1,78	135,0	441505
		1190	750	0,89	76,0	441506
	Internal unit	2150	3000	6,45	402,0	441507
		2150	1500	3,23	238,0	441508
		2150	750	1,61	135,0	441509
	Internal unit	1190	3000	3,57	226,0	441510
		1190	1500	1,78	135,0	441511
		1190	750	0,89	76,0	441512

Wooden template

purchase only

	Description	Length mm	Width mm	Surface m ²	Weight approx. kg	Part No.
	Wooden template for external radius With NOEtop R 275 and NOE R 250, please inform us of the radius when ordering.				7,0	352221
	Wooden gauge for internal radius With NOEtop R 275 and NOE R 250, please inform us of the radius when ordering.				7,0	352220

Element connection

	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
	Wedge plate for the quick connection of individual elements, galvanised				0,6	102520
	Wedge lock for longitudinal compensation of 0-140 mm, galvanised				4,3	350000
	Wing head bolt tie rod thread, 200 mm long, clamp length 160 mm, galvanised	200			0,4	135009
	Hexagonal nut 30 with standard tie rod internal thread galvanised	30			0,1	680900
	NOE Toplock adapter NOEtop R 275 / NOE R 250 clamps to connect NOEtop R 275 and NOE R 250 circular formwork				4,4	137977

Stop-end form


	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
	Stop-end support with fastening screw and screw base, each stop-end support requires 1 tie rod and 1 waling plate with wing nut				1,9	350390
	Alignment channel 1425 mm long, galvanised	1425			21,5	135210
	Spreader bar galvanised	750			23,0	350330

Tie rod Ø 15 mm



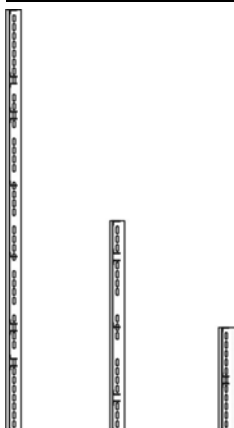
Rods, core Ø 15 mm, external Ø 17 mm, permissible tensile load 90 kN (in acc. with DIN 18216).

	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
	Waling plate with wing nut bearing area 140x100 mm, galvanised	100	140		1,4	691700
	Tie rod Ø 15 mm capped, galvanised	1500 300			2,1 0,4	671500 670300
	Sprint nut galvanised	80	80	60	0,7	680580
	Compensation channel 410 mm long, galvanised	410			9,4	135109



Scaffold

	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
	Ratio concreting brackets 100 for fastening to NOEtop R 275, NOE R 250 and NOE R 110 circular formwork, stair width 1000 mm, with nailing strip, incl. pin and spring pin, galvanised				15,8	530014
	Handrail tube 1380 H 1380 mm high, tube Ø 33.7 mm, galvanised			1380	5,0	111403
	Handrail tube 1060 1060 mm high, tube Ø 33.7 mm, galvanised **hire only **			1060	4,0	111400
	LG-W 200 plug 9 mm galvanised				0,1	890834


Components for circular formwork

	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
	Combi 20 S girder	3000			30,0	743000
	200x60x4 mm, intermediate	1500			15,0	741500
	dimensions priced as next-longest	750			7,5	740750
	length, longer lengths on request, galvanised					
	Cross waler for external formwork for NOEtop R 275 and NOE R 250, fastened with 2 bolts M 16x30 bolts (313200), galvanised				3,8	350299
	Cross waler for NOEtop R 275 and NOE R 250, fastened with 2 bolts M 16x30 bolts (313200), galvanised				3,1	350300
	Turnbuckle long, fastened with 2 M 16x100 bolts (314000), galvanised	412- 530			1,6	350310
	Turnbuckle medium, fastened with 2 M 16x100 bolts (314000), galvanised	312- 430			1,4	350315
	Turnbuckle short, fastened with 2 M 16x100 bolts (314000), galvanised	212- 330			1,2	350320
	Connection channel for R 250	3000			16,0	350340
	circular formwork	1500			8,0	350350
	painting	750			4,0	350360


	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
	Ring bolt M 16, 1.5T, swivelling 360° swivel, loadable from all sides, load capacity label, spanner with ring bolt permanently attached, labelling of optimum load direction, load capacity: under vertical tension 4000 kg, under 90° load 1500 kg				0,3	821110
	Spacer washer for M 16 Ø 56 mm, hole Ø 17, mm, 5 mm thick, DIN 440, galvanised Hire only! For purchase see price list for formwork and scaffold accessories.				0,0	314600
	Safety nut M 16 DIN 985, 8.0, galvanised, packaging unit 200 No.				6,8	373012
	Bolt M 16x100 with nut and washer, galvanised Hire only! For purchase see price list for formwork and scaffold accessories.				0,2	314000
	Bolt M 16x70 with nut and washer, galvanised Hire only! For purchase see price list for formwork and scaffold accessories.				0,2	313800
 	Bolt M 16x30 with nut and washer, galvanised Hire only! For purchase see price list for formwork and scaffold accessories.				0,1	313200
	Disc bolt M 8x40 for fastening facing, with nut and washer, DIN 15237, galvanised				0,0	310907
	Combi butt strap for connecting roughly butted Combi 20 girders 6 mm thick, painted	290	165	6	1,8	352200

	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
	Multi-hole C-Profil 100x50x5 mm, multi-hole version, intermediate dimensions priced as next-longest length, longer lengths on request, lacquered	1000			6,4	261000
 	Stiffener requires 4 bolts M 16x30 (Part No. 313200), galvanised				2,4	350380
	Stacking foot for NOE R 250, requires 2 bolts M 16x70 (Part No. 313800), galvanised				2,9	350410


NOE Plugs

	Description	Ø mm	Length mm	Height mm	Weight approx. kg	Part No.
	PVC plastic plugs SFL 30 for hole Ø 26 mm, to seal tie rod holes in NOEtop, NOE Top 2000 panels, NOE circular formwork panels, domed head, Ø 30 mm, colour white, packaging unit 250 No.	30,0		12	0,6	693409
	PVC plastic plugs SFL 30 with NOE-logo for hole Ø 26 mm, to seal tie rod holes in NOEtop, NOE Top 2000 panels, NOE circular formwork panels, domed head, Ø 30 mm, colour white, with NOE-logo packaging unit 250 No.	30,0			0,6	693515



NOEtop FS with steel facing Panels

	Description	Width mm	Height mm	Surface m ²	Weight approx. kg	Part No.
	NOEtop FS panel with steel facing	750	3500		329,7	124566
	Consisting of: Panel with 5-mm	750	2750		247,7	124564
	steel facing, locking	750	1250		122,1	124562
	plate S, compensation plate S,	750	600		62,5	124560
	connection tube, bolts, galvanised. Chamfers and pins are not included in the price.					

NOEtop FS with steel facing Accessories

	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
	NOEtop FS Sliding plate S galvanised	155	750	121	5,5	124608
	Sprint nut galvanised	80	80	60	0,7	680580
	NOEtop FS Pin D20 x 150 Ø 20 mm, with spring pin, galvanised	150			0,4	124632
	NOEtop FS locking bracket galvanised	360	80	80	2,9	124635
	NOEtop FS swivel bracket S galvanised	180	70	70	1,9	124637
	NOEtop FS crane suspension painted red	90	70	345	1,3	124639
	PVC double triangle chamfer 10x10, transparent packaging unit 25 m				3,8	841201

NOEtop FS working platform

	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
	NOEtop FS Platform 850 x 990 galvanised 1 guard rail NOEtop FS 900, Part No. 124645 is required.	990	850		64,6	124640
	NOEtop FS Platform 850 x 1575 galvanised 1 NOEtop FS guard rail 450, Part No. 124646, 1 guard rail NOEtop FS, Part No. 124645 and 2 RS platform guard rail 750, Part No. 126721 are required.	1575	850		96,8	124641
	NOEtop FS guard rail 900 galvanised	935	35	1160	15,0	124645
	NOEtop FS guard rail 450 galvanised	485	35	1160	10,8	124646
	RS platform guard rail 750 galvanised	785	35	1165	13,5	126721
	RS platform ladder support platform fastening to platform requires 1 bolt M 16x30 Part No. 313200 and to secure the ladder requires 1 spring pin, Part No. 555990, galvanised	75	50	146	0,6	126727

	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
	Handrail tube 1380 H 1380 mm high, tube Ø 33.7 mm, galvanised			1380	5,0	111403
	Handrail tube 1060 1060 mm high, tube Ø 33.7 mm, galvanised **hire only **			1060	4,0	111400
	Hexagonal bolt M 8x80 DIN 601, with nut Hire only! For purchase see price list for formwork and scaffold accessories.				0,0	312699
	LSS ladder extension left each ladder joint requires 1 ladder extender piece left, Part No. 126707, 1 ladder extender piece right, Part No. 126708, 2 tie rods, 600 mm long, Part No. 670600, 4 Sprint nuts, Part No. 680580			440	2,6	126707
	LSS ladder extender piece right each ladder joint requires 1 ladder extender piece left, Part No. 126707, 1 ladder extender piece right, Part No. 126708, 2 tie rods, 600 mm long, Part No. 670600, 4 Sprint nuts, Part No. 680580			440	2,6	126708
	Tie rod Ø 15 mm capped, galvanised	600			0,8	670600
	Sprint nut galvanised	80	80	60	0,7	680580

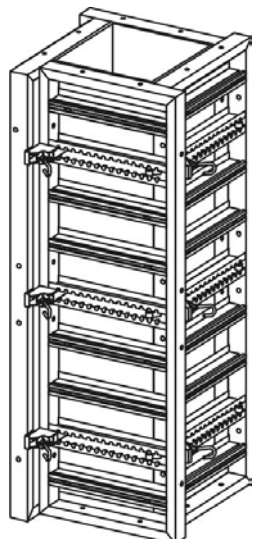
	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
	LSS ladder with back-propping Aluminium	770	450	2100	15,1	126726
	NOEtop FS ladder bracket including 3 spring pins				7,9	126705
	NOEtop FS ladder bracket including 3 spring pins to secure and 2 bolts M 12x30 for fastening the ladder adapter 126729, galvanised				5,3	126706
	RS platform ladder adapter NOE Vario 2000 column formwork Fastening to NOEtop FS or NOE Vario 2000 requires 1 hammerhead bolt with handle, Part No. 319338, galvanised	130	82	200	2,3	126729
	LSS ladder 2800		450	1015	2,7	126764
	incl. Ribbed plugs aluminium		450	1855	4,9	126763
			450	2415	6,3	126762
			450	2695	7,0	126761
			450	2975	7,7	126760

	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
	RS platform Back-propping 1590 Aluminium	800	750	1590	14,5	126725
	Prop push/pull 1.00-1.20 m ext. length 1000-1200 mm, Load capacity: 15 KN galvanised	1000- 1200			8,4	697045
	RS platform Back-propping 790 aluminium	800	750	790	8,0	126757
	Hinge Ø 60 mm for fastening to the formwork, each panel requires a hammer- head bolt with handle.				0,8	697012
	L-pin Ø 16 yellow passivated galvanized				0,3	697010
	Spring pin Ø 4 mm galvanised				0,0	913304
	Hammer-head bolt with handle integrated Sprint nut 230 mm long, clamp length 125 mm, permissible tensile load =18.8 kN, galvanised	125			1,2	319338
	Hammer-head bolt with handle KL 230		230		1,3	319343
	Waling plate for hammer-head bolt 319343	180	120	10	1,6	319350

	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
	Spring pin 12x80 mm, galvanised				0,1	555990
 	Bolt M 16x30 with nut and washer, galvanised Hire only! For purchase see price list for formwork and scaffold accessories.				0,1	313200
	Bolt M 16x100 with nut and washer, galvanised Hire only! For purchase see price list for formwork and scaffold accessories.				0,2	314000





NOE Vario 2000



For rectangular cross sections infinitely adjustable from 150-600 mm. Height in modules of 500 mm. Frame panel supplied with nailing cores in the hat profiles.

	Description	Width mm	Height mm	Surface m ²	Weight approx. kg	Part No.
	2750 mm high set consisting of: 4 frame panels (Part No. 125252) 2750 mm deep, 12 tying shoes (Part No. 126050), 12 tying units (Part No. 126060)			9,92	635,6	126062
	2500 mm high set consisting of: 4 frame panels (Part No. 125253) 2500 mm high, 12 tying shoes (Part No. 126050), 12 tying units (Part No. 126060)			9,00	499,2	126063
	1000 mm high set consisting of: 4 frame panels (Part No. 125254) 1000 mm high, 8 tying shoes (Part No. 126050), 8 tying units (Part No. 126060)			3,60	300,8	126064
	500 mm high set consisting of: 4 frame panels (Part No. 125255) 500 mm high, 4 tying shoes (Part No. 126050), 4 tying units (Part No. 126060)			1,80	164,4	126065



	Description	Width mm	Height mm	Surface m ²	Weight approx. kg	Part No.
	Frame panel	900	2750	2,48	137,6	125252
	without nail core, nail core upon request, galvanized	900	2500	2,25	118,5	125253
		900	1000	0,90	60,5	125254
		900	500	0,45	33,8	125255

NOE Vario 2000 connections

	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
	Tying shoe incl. plug, for connecting above corner, each tying shoe requires one tying unit, galvanized				5,0	126050
	Tying unit galvanized				2,1	126060
	Tying shoe extension short incl. plug, for props with 4 frame panels for edge lengths of 600-800 mm, in conjunction with the bracing extension (Part No. 126179), galvanized				6,5	126190
	Tying shoe extension incl. plug, for props with 6 frame panels for edge lengths of 600-900 mm, in connection with the belt extension (part no. 126179), galvanized				6,9	126180
	Bracing extension incl. plug				23,4	126179
	NOE Toplock for panel connections and longitudinal compensations up to 42 mm, permissible tensile load 15 kN, galvanized				3,7	137976


	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
	Toplock for the quick butted connection of any arrangement of panels, compensation up to 30 mm, permissible tensile load 20 kN, galvanised, Hire only				3,7	137990
	Top Adjustable lock for infinitely adjustable compensation piece 0-135 mm, permissible tensile load 20 kN, galvanised, hire only				5,2	137985
	NOEtop Connection screw 250 with tie-rod thread DW 15 mm, length 280 mm, thread length 250 mm, galvanised	285			0,5	135019
	Waling plate 80 X 55 mm, 20 mm thick, hole 24 mm, galvanised	80	55		0,6	691500
	Sprint nut galvanised	80	80	60	0,7	680580
	Crane hook for NOEtop profile, with suspension chain, load 2000 kg for vertical tension, for use see operating instructions, galvanised				6,4	135905

NOE Vario 2000 panel accessories

	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
	Chamfer profiles 21 for sealing and breaking of edges, chamfer width 21 mm, hard PVC			2750	0,6	840740
				2500	0,6	840730
				1000	0,2	840720
				500	0,1	840710
	Chamfer profiles 10 for sealing and breaking of edges, chamfer width 10 mm, hard PVC			2500	0,2	840630
	NOEform screw 7x21 7x21 mm, for fastening 21 mm formwork facing, galvanised packing unit 500 No.				0,0	317009

Concreting platform RS

The concreting platform can be fitted to the NOE Vario 2000 column formwork.

	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
	RS platform 875x875 complete	875	875	200	38,4	126700
	RS platform 875x1375 complete	1375	875	200	54,3	126702
	RS platform guard rail 375 galvanised	410	34	1165	10,1	126720
	RS platform guard rail 750 galvanised	785	35	1165	13,5	126721
	Handrail tube 1060 1060 mm high, tube Ø 33.7 mm, galvanised **hire only **			1060	4,0	111400
	Handrail tube 1380 H 1380 mm high, tube Ø 33.7 mm, galvanised			1380	5,0	111403
	Hexagonal bolt M 8x80 DIN 601, with nut Hire only! For purchase see price list for formwork and scaffold accessories.				0,0	312699
	LG-W 200 plug 9 mm galvanized				0,1	890834

	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
	LSS ladder extension left each ladder joint requires 1 ladder extender piece left, Part No. 126707, 1 ladder extender piece right, Part No. 126708, 2 tie rods, 600 mm long, Part No. 670600, 4 Sprint nuts, Part No. 680580			440	2,6	126707
	LSS ladder extender piece right each ladder joint requires 1 ladder extender piece left, Part No. 126707, 1 ladder extender piece right, Part No. 126708, 2 tie rods, 600 mm long, Part No. 670600, 4 Sprint nuts, Part No. 680580			440	2,6	126708
	Tie rod Ø 15 mm capped, galvanised	600			0,8	670600
	Sprint nut galvanised	80	80	60	0,7	680580
	LSS ladder with back-propping Aluminium	770	450	2100	15,1	126726
	RS platform ladder support platform fastening to platform requires 1 bolt M 16x30 Part No. 313200 and to secure the ladder requires 1 spring pin, Part No. 555990, galvanised	75	50	146	0,6	126727
	NOEtop FS ladder bracket including 3 spring pins to secure and 2 bolts M 12x30 for fastening the ladder adapter 126729, galvanised				5,3	126706


	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
	RS platform ladder adapter NOE Vario 2000 column formwork Fastening to NOEtop FS or NOE Vario 2000 requires 1 hammerhead bolt with handle, Part No. 319338, galvanised	130	82	200	2,3	126729
	LSS ladder 2800		450	3640	9,4	126742
	incl. Ribbed plugs aluminium		450	2800	7,2	126741
			450	1960	5,0	126740
	RS platform Back-propping 1590 Aluminium	800	750	1590	14,5	126725
	RS platform Back-propping 790 aluminium	800	750	790	8,0	126757
	Prop push/pull 1.00-1.20 m ext. length 1000-1200 mm, Load capacity: 15 KN galvanised	1000- 1200			8,4	697045
	Hinge Ø 60 mm for fastening to the formwork, each panel requires a hammer- head bolt with handle.				0,8	697012
	L-pin Ø 16 yellow passivated galvanized				0,3	697010
	Spring pin Ø 4 mm galvanised				0,0	913304

	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
	Hammer-head bolt with handle integrated Sprint nut 230 mm long, clamp length 125 mm, permissible tensile load =18.8 kN, galvanised	125			1,2	319338
	Hammer-head bolt with handle KL 230		230		1,3	319343
	Waling plate for hammer-head bolt 319343	180	120	10	1,6	319350
	Spring pin 12x80 mm, galvanised				0,1	555990
 	Bolt M 16x30 with nut and washer, galvanised Hire only! For purchase see price list for formwork and scaffold accessories.				0,1	313200
	Bolt M 16x100 with nut and washer, galvanised Hire only! For purchase see price list for formwork and scaffold accessories.				0,2	314000

Hex-head bolt DIN 933

	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
	Hexagonal bolt M 16x30 DIN 933, 8.8, galvanised, packaging unit 50 No.				3,8	362340
	Hexagonal bolt M 16x100 DIN 933, 8.8, galvanised, packaging unit 25 No.				4,3	362364
	Hexagonal nut M 16 DIN 934, 8.0, galvanised, packaging unit 200 No.				6,0	370024
	Washer shape A 17 DIN 125, galvanised, packaging unit 250 No.				2,8	380026

Bracing

	Description	Length mm	Width mm	Surface m ²	Weight approx. kg	Part No.
	Drophead 360 mm high, drop 170 mm, load 48 kN, yellow galvanised Fastened to NOEprop prop with 2 bolts M 16x40, Euro- or steel tube prop with 2 bolts M 10x40			0,01	8,0	112520
	Bolt M 16x40 with nut and washer, galvanised Hire only! For purchase see price list for formwork and scaffold accessories.				0,1	313400
	Bolt M 10x40 with nut and washer Hire only! For purchase see price list for formwork and scaffold accessories.				0,0	311100
	NOEdeck head piece 38 mm For positioning props under longitudinal girders				0,1	115443

Longitudinal girders

Aluminium, 160 mm high, (length given between centres of deck props),
powder-coated on request


* = not for purchase, only for hire

	Description	Length mm	Width mm	Surface m ²	Weight approx. kg	Part No.
	Aluminium longitudinal girder	2400		0,13	23,3	115402
	Aluminium, 160 mm deep,	2100		0,12	20,3	115401
	(length given between centres of	1555		0,09	14,7	115407
	deck props)	1500		0,08	13,8	115400
	NOEdeck Aluminium longitudinal	1555			11,7	115404
	girder Gen.2	2100			15,8	115409
	Aluminium, 220 mm high, (length given between centres of deck props), powder-coated	2400			18,8	115425


Panels with NOEform facing

	Description	Length mm	Width mm	Surface m ²	Weight approx. kg	Part No.
	Aluminium deck panel 1500 mm	1500	900	1,35	22,3	115312
	Aluminium, with NOEform facing	1500	600	0,90	16,7	115322
		1500	450	0,68	14,7	115332
	Aluminium deck panel 900 mm*	900	900	0,81	14,7	115342
	Aluminium, with NOEform facing	900	600	0,54	11,0	115352
		900	450	0,41	9,4	115362


Cross beam

	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
	Aluminium cross beam	1500			4,6	115414
	Formwork facing supported on aluminium cross beams and longitudinal girders, with integral nailing core	900			2,8	115410
	Cross beam, wood 1500	1500	nur Miete		8,6	116150



Compensation piece

	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
	Aluminium compensation girder for supporting 21 mm thick facing	1500			4,7	115416
	between aluminium longitudinal girders, with integral nailing core, purchase only	900			3,0	115412
	Compensation bridge 75-650 mm, positioned between 2 panels or 2 longitudinal girders as a tension and compression connection, galvanised				9,0	112900

Accessories longitudinal girders

	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
	Longitudinal girder adapter for perpendicular suspension of aluminium longitudinal girders in aluminium longitudinal girders, painted				4,3	115430
	Spanner bolt R 12x35				0,1	319341




Connections

	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
	NOEdeck panel connector galvanised				0,6	115396
	Girder clamp For the connection of longitudinal girders with NOE Combi 10 or NOE Combi 20 girders, galvanised				1,9	113100

Accessories

	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
	Handrail post attachment for attaching to longitudinal girder, fastened at the handrail tube with a bolt M 8x80 (Part No. 312699), galvanised				3,4	114920
	LG-W 200 plug 9 mm galvanized				0,1	890834
	Handrail tube 1060 1060 mm high, tube Ø 33.7 mm, galvanised **hire only **			1060	4,0	111400
	Handrail tube 1380 H 1380 mm high, tube Ø 33.7 mm, galvanised			1380	5,0	111403
	Guardrail post tube 1600 1600 mm high, for guardrail holder Ø 33.7 mm, galvanised			1600	8,2	111401

	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
	Guard rail tube 1880 GR 3 wedges (Part No. 507012) are required per guard rail tube, galvanised used with CS frame grillage	150	50	1880	8,0	507011
	Guard rail tube 1380 GR 2 wedges (Part No. 507012) are required per guard rail tube, galvanised used with CS frame grillage	150	50	1380	5,8	507010
	Wedge for guard rail tube GR	230	15	52	0,3	507012
	NOEsafe protective grille 2600 can be used with the railing tube part no. 507024	2600	1210	1500	19,8	507040
	NOEsafe frame grid box Capacity max. 60 protective grids Stacking height max. 2 units, galvanised	1335	1200	1200	83,0	507042
	NOEsafe railing tube 1450mm		1450		4,3	507024
	NOEsafe railing bracket galvanised	175	125	150	1,3	507020
	NOEsafe grille holder fitted	100	50	112	0,4	507029

	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
	Bolt MMS-plus 16X130 SSK Package of 10 pieces purchase only				2,4	313151
	CS frame grillage 2556 used with guard rail tube 1380 GR (Part No. 507010) and guard rail tube 1880 GR (Part No.507011)	2556	25	1150	17,0	507045
	CS frame grillage 1256 used with guard rail tube 1380 GR (Part No. 507010) and guard rail tube 1880 GR (Part No. 507011)	1256	25	1150	9,0	507047
	CS Barrier box capacity max. 40 frame grille, Setting grid box can be dismantled, Stacking height max. 4 pieces,galvanised				97,0	507048
	Bolting pin for handrail tube for handrail tube 10601380 H, 1380 GR and 1880 GR, 1600 OD 24 mm				0,8	111402
	NOE anchor cap D 15 Polyamide, FMPPA approved, for tie rod Ø 15 mm Packaging Unit: 50 pieces				3,4	694901
	NOEtop Connection bolt 100 thread length 100 mm, galvanised				0,3	135010
	NOE plug D 15 Polyamide Packaging Unit: 50 pieces				0,1	694904

	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
	Belt with ratchet 2.5 T ratchet belt with snap hook, belt width 50 mm, in acc. with DIN EN 12195-2, Length 8000 mm (7500 + 500 mm), Only for lashing, not for lifting loads	8000			3,4	990013

Transport aids

	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
	Transport pallet for panels up to 750 mm width, for 10 panels, painted				53,0	113300
	Transport pallet for panels up to 900 mm width, up to 10 panels, painted				57,0	113310
	Travelling device for moving the transport pallet, permissible load 7.5 kN, painted				8,0	890450

NOEsafe anchorage mast

Fall-arrest system for working on deck formwork or near a precipitous edge. The NOEsafe anchorage mast can be used on all formwork liners available on the market. Conforms to DIN EN 795:2012 Type E and certified by an external testing institute (DEKRA). Complies with the regulations of the national occupational accident insurance bodies Suva (CH), BGGau (D) and BauV (AT).

	Description	Ø mm	Width mm	Height mm	Weight approx. kg	Part No.
	NOEsafe anchorage mast on demand Mobile anchorage mast for safe working conditions in a fall danger zone Transport dimensions: L 2250, W 2080, H 1350 mm	2250, 0			450,0	.
	NOEsafe anchor mast inspection book on demand Assembly and operating manual as well as test sheets for daily functional testing on the construction site		210	40	1,0	..

Accessories for NOEsafe anchorage mast (purchase only)

	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
	NOEsafe self-retracting lifeline 9 m Up to 9 m working radius				3,8	922960
	NOEsafe self-retracting lifeline 6 m Up to 6 m working radius				3,5	922961

	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
  	NOEsafe safety harness	280	400	80	1,5	922962
	NOEsafe carrying case	420	155	305	1,5	922963
	NOEsafe PPE kit 9 m Personal protective equipment kit consisting of: 1 NOEsafe self- retracting lifeline 9 m (Part No. 922960), 1 NOEsafe safety harness (Part No. 922962), 1 NOEsafe carrying case (Part No. 922963)	420	155	305	6,8	922964
	NOEsafe PPE kit 6 m Personal protective equipment kit consisting of: 1 NOEsafe self- retracting lifeline 6 m (Part No. 922961), 1 NOEsafe safety harness (Part No. 922962), 1 NOEsafe carrying case (Part No. 922963)	420	155	305	6,3	922965

H 20 timber beam

	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
	H 20 timber beam	5900			26,9	110590
	special lengths on request	4900			22,3	110490
		3900			17,8	110390
		3300			15,0	110330
		2900			13,2	110290
		2500			11,4	110250

Panels

	Description	Length mm	Width mm	Surface m²	Weight approx. kg	Part No.
	Three-ply boards 21 mm thick	2500	500	1,25	12,5	275200
		2000	500	1,00	10,0	275100
		1500	500	0,75	7,5	275000
	Three-ply boards with steel edge, 21 mm thick	2500	500	1,25	12,5	275201

Bracing

	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
	Fork head galvanised				4,1	110715
	Fork head				2,6	110714
	Spring pin 12x80 mm, galvanised				0,1	555990

	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
	Fork claw				1,2	110710

NOE H20 beam panel

	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
	NOE beam angle 300 galvanised				6,0	110800
	NOE beam extension 600 galvanised				6,0	110810
	Beam clamp 300 V 300 mm, galvanised	350	400	140	7,4	110900
	Beam extension 600 V 600 mm, galvanised	180	600	120	4,5	110910

Accessories

	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
	Handrail clamp 1.00 m clamping range 50 to 400 mm, range of application up to 40 m above ground, max. spacing 2.00 m, galvanised, Hire only!				7,2	900050
	Guard rail clamp 1.40 m clamping range 30-820 mm, galvanised				14,2	900052
	Girder fork For H 20 beam, painted				3,0	110730
	Tie stirrup H 20 for connecting H 20 timber beams to cross waler (steel), yellow galvanised				0,9	110215
	Wedge clamp for connecting crossing H 20 timber beams, clamping range 80 mm, galvanised				0,8	110214
	Screw nail fix for connecting H 20 timber beams to NOE Combi 20, galvanised fastening to NOE Combi 20 girders with bolts M 16x30 (Part No. 313200),				0,4	110690

	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
 	Bolt M 16x30 with nut and washer, galvanised Hire only! For purchase see price list for formwork and scaffold accessories.				0,1	313200
	Belt with ratchet 2.5 T ratchet belt with snap hook, belt width 50 mm, in acc. with DIN EN 12195-2, Length 8000 mm (7500 + 500 mm), Only for lashing, not for lifting loads	8000			3,4	990013
	Combi console	131	597	898	8,2	552223
	Shuttering rail	120	78	845	4,2	552224 552233

NOEsafe anchorage mast

Fall-arrest system for working on deck formwork or near a precipitous edge. The NOEsafe anchorage mast can be used on all formwork liners available on the market. Conforms to DIN EN 795:2012 Type E and certified by an external testing institute (DEKRA). Complies with the regulations of the national occupational accident insurance bodies Suva (CH), BGGau (D) and BauV (AT).


	Description	Ø mm	Width mm	Height mm	Weight approx. kg	Part No.
	NOEsafe anchorage mast on demand Mobile anchorage mast for safe working conditions in a fall danger zone Transport dimensions: L 2250, W 2080, H 1350 mm	2250, 0			450,0	.
	NOEsafe anchor mast inspection book on demand Assembly and operating manual as well as test sheets for daily functional testing on the construction site		210	40	1,0	..

Accessories for NOEsafe anchorage mast (purchase only)



	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
	NOEsafe self-retracting lifeline 9 m Up to 9 m working radius				3,8	922960
	NOEsafe self-retracting lifeline 6 m Up to 6 m working radius				3,5	922961

	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
  	NOEsafe safety harness	280	400	80	1,5	922962
	NOEsafe carrying case	420	155	305	1,5	922963
	NOEsafe PPE kit 9 m Personal protective equipment kit consisting of: 1 NOEsafe self- retracting lifeline 9 m (Part No. 922960), 1 NOEsafe safety harness (Part No. 922962), 1 NOEsafe carrying case (Part No. 922963)	420	155	305	6,8	922964
	NOEsafe PPE kit 6 m Personal protective equipment kit consisting of: 1 NOEsafe self- retracting lifeline 6 m (Part No. 922961), 1 NOEsafe safety harness (Part No. 922962), 1 NOEsafe carrying case (Part No. 922963)	420	155	305	6,3	922965


NOEtable deck table

	Description	Length mm	Width mm	Surface m ²	Weight approx. kg	Part No.
	Standard deck table	5000	2500	12,50	607,0	699050
	with NOE H20 / NOE Combi 20	5000	2000	10,00	500,0	699030
	boarding supports, NOE Combi 20	4000	2500	10,00	510,0	699040
	cross waler, 21 mm rental facing,	4000	2000	8,00	425,0	699020
	4 crane hooks					
	For fastening are required					
	4 NOEtable swivelling head (Part					
	no. 699150)					
	32 Bolt M 16x30 (Part no.					
	313200)					
	4 Deck prop with min. 30 kN					
	Capacity					

Swivelling head



	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
	NOEtable swivelling head for use as a folding and lockable support attachment integrated into the deck table, only for deck tables with NOE Combi 20 primary beam (e.g. NOE standard deck tables), transport height of a deck table incl. retracted prop approx. 42 cm, loading max. 30 kN, required prop length: clear void height - 28 cm, galvanised Not usable with NOE ADS or NOEprop props				18,5	699150
	Adapter for NOEprop deck prop for use with NOEprop props / ADS props NOEtable swivelling head. 4 No. bolts M 16x40 with nut and washer, Part No. 313400 are needed. Galvanised	170	160		3,1	699010
	Bolt M 16x40 with nut and washer, galvanised Hire only! For purchase see price list for formwork and scaffold accessories.				0,1	313400

Fixing head

	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
	Fixing head for deck table for simple clamping of props to NOE standard deck table, load max. 30 kN, required prop length: clear void height - 48 cm, galvanised				16,2	699200

Deck table accessories for NOE standard deck table

	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
	Deck table tying support for tying deck tables with tie rod and Sprint nut, galvanised				1,4	922480
	Guard rail post tube 1500 mm high, tube Ø 48.3 mm, painted	1500			6,6	111500
	Guard rail post tube 1200 mm high, tube Ø 48.3 mm, rail height 1130 mm	1200			10,6	559100
	Guard rail tube holder for deck table for guard rail post tube Ø 48.3 mm, for fastening to NOE Combi 20 girders. Fastening requires 2 bolts M 16x100 (part. no. 314000), galvanised				1,8	111411
	Bolt M 16x100 with nut and washer, galvanised Hire only! For purchase see price list for formwork and scaffold accessories.				0,2	314000
	LG-W 200 plug 9 mm galvanised				0,1	890834




	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
	Crane hook for deck table for fastening to NOE Combi 20 facing support girders, galvanised For fastening are required: 1 crane hook support (Part No. 350201) 1 bolt M 16x100 (Part No. 31400) 1 safety nut M 16 (Part No. 373013) 2 bolts M 10x30 (Part No. 313200)				0,6	350200
	Crane hook support for NOE Combi 20 girder, galvanised installation requires an additional hole Ø 17 mm to be drilled				1,9	350201
	Crane suspension, retractable 2 No. bolts M16x40 (Part No. 362344 are needed to fasten it in place. Purchase only	340	110	165	5,8	350205
	Hexagonal bolt M 16x40 DIN 933, 8.8, galvanised, packaging unit 50 No.				4,5	362344
	Washer shape A 17 DIN 125, galvanised, packaging unit 250 No.				2,8	380026
	Hexagonal nut M 16 DIN 934, 8.0, galvanised, packaging unit 200 No.				6,0	370024
	Guard rail tube holder right for guard rail tubes Ø 33,7 mm two bolts M 16 x 30 (Part no. 313200) are required to attach it purchase only	390	105	270	2,9	111412
	Bolting plate for guardrail tube Ø 33.7 mm, painted to screw on 2x M16x30 (part no. 313200) are needed	380			2,1	111410

	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
	Guard rail tube holder left for guard rail tubes Ø 33,7 mm two bolts M 16 x 30 (Part no. 313200) are required to attach it purchase only	390	105	270	2,9	111413
	Handrail tube 1380 H 1380 mm high, tube Ø 33.7 mm, galvanised			1380	5,0	111403
	Screw nail fix for connecting H 20 timber beams to NOE Combi 20, galvanised fastening to NOE Combi 20 girders with bolts M 16x30 (Part No. 313200),				0,4	110690
	Bolt M 16x100 with nut and washer, galvanised Hire only! For purchase see price list for formwork and scaffold accessories.				0,2	314000
	Bolt M 16x30 with nut and washer, galvanised Hire only! For purchase see price list for formwork and scaffold accessories.				0,1	313200
	Safety nut M 16 DIN 985, 8.0, galvanised, packaging unit 200 No.				6,8	373012
	Wedge clamp for connecting crossing H 20 timber beams, clamping range 80 mm, galvanised				0,8	110214
	Suspension hinged bracket scaffold on the deck table				9,1	469654

Associated products

	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
	Blade clamp for Ø 48-76 mm, galvanised Part No. 110722 = purchase only, Part No. 449600 = hire only				1,1	110722
	Belt with ratchet 2.5 T ratchet belt with snap hook, belt width 50 mm, in acc. with DIN EN 12195-2, Length 8000 mm (7500 + 500 mm), Only for lashing, not for lifting loads	8000			3,4	990013

Travelling device

	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
	Table lifting fork 5000 permissible load 1000 kg				564,0	449990
	Table lifting fork 8000 permissible load 1750 kg				1536,0	449991
	Deck table bracket load 24 kN, adjustment range 260 mm, painted				10,8	922500
	Sling rope for moving the deck table, quadruplicate, each 10 kN, L1 = 800 mm, L2 = 8500 mm purchase only				25,1	922700
	Chain hoist for moving deck table, 15 kN, 375-1500 mm				11,0	922800

	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
	NOEtable transfer truck	981	954	1980	98,0	867120
	Longitudinal girder	250	50	2500	18,0	867121
	AR Cross-beam	240	48	948	6,8	867122
	LG-W 200 plug 9 mm galvanized				0,1	890834
	AR standard with spigot	2000 3000 4000			9,3 15,5 18,1	868003 868005 868006
	AR O locking bar steel	900 2070			4,0 7,0	868104 868110
	AR diagonal brace steel	2200 2810			7,4 8,9	868218 868205

Countersunk screw

	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
	Countersunk bolt M 8x35 DIN 7991, 8.8, galvanised, packaging unit 200 No.				2,3	365134
	Hexagonal nut M 8 DIN 934, 8.0, galvanised, packaging unit 1000 No.				4,7	370016
	Washer shape A 8.4 DIN 125, galvanised, packaging unit 1000 No.				2,1	380018

NOE H20 Lifter

	Description	Length mm	Width mm	Height mm	Surface m ²	Weight kg / m ²	Part No.
	NOE H20 Lifter For secure mounting of several H20 girders. At least 2 modular rails, part no. 867202 and 2 anti- tilt devices, part no. 867201 are required. 1 H20 suspension fork, part no. 110730, is required for operation and adjustment.	2736	1098	295		103,2	867200
	NOE H20 Lifter anti-tilt device for bracing H20 girders	2348	106	80		8,6	867201
	NOE H20 Lifter modular rail	2323	100	100		17,7	867202
	Girder fork For H 20 beam, painted					3,0	110730

Euro-props BD

in acc. with EN 1065, with test mark, external thread, galvanized

	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
	Euro-props BC 25 load 36,1-20,0 kN, dotted orange	1500- 2500			13,6	697725

Euro-props CD

in acc. with EN 1065, with test mark, external thread, galvanized

	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
	Euro-props CD 30 load 36,1-20,6 kN, dotted yellow	1800- 3000			17,4	697730
	Euro-props CD 30 load 36,1-20,0 kN, dotted red	2000- 3500			20,1	697735
	Euro-props CD 40 load 36,1-20,0 kN, dotted blue	2300- 4000			25,1	697740
	Euro-props CD 55 load 36,1-20,0 kN, dotted green	3000- 5500			36,8	697755

Euro-props D

in acc. with EN 1065, with test mark, external thread, load 20 kN, galvanised


	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
	Steel tube deck prop following the approach in DIN 4424 Marking: violet hatching	1350- 2250			14,0	697422
	Euro-prop D 25 bright orange marking	1700- 2500			14,0	697525
	Euro-prop D 30 bright yellow marking	1800- 3000			15,1	697530
	Euro-prop D 35 bright red marking	2100- 3500			21,0	697535
	Euro-prop D 55 Use fork head 890560	3100- 5500			34,5	697550

Euro-props E

in acc. with EN 1065, with test mark, external thread, load 30 kN, galvanised


Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
Steel tube deck prop Design follows DIN 4424, marking: orange hatching	850- 1450			10,1	697401
Euro-prop E 25 violet marking	1700- 2500			16,0	697425
Euro-prop E 30 magenta marking	1800- 3000			19,8	697430
Euro-prop E 35 orange marking	2100- 3500			22,0	697435
Euro-prop E 40 black marking	2350- 4000			28,1	697440

Euro-prop accessories

	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
	Prop folding tripod 48-80 with clip fastening suitable for all commonly available props of 48- 80 mm Ø, galvanised, for hire only, not for purchase				10,5	900070
	Folding tripod 48-80 with clip fastening usable with all commonly available props of 48- 80 mm Ø, galvanised				12,6	900072
	Blade clamp for Ø 48-76 mm, galvanised Part No. 110722 = purchase only, Part No. 449600 = hire only				1,1	110722
	Folding tripod 85-120 with clip fastening usable with all commonly available props of 85- 120 mm Ø, galvanised				13,5	900073
	Folding tripod claw as replacement part for folding tripod 85-120 Part No. 900073, galvanised				4,8	900075
	Folding tripod claw as replacement part for folding tripod 48-80 Part No. 900072, galvanised				3,2	900074
	Belt with ratchet 2.5 T ratchet belt with snap hook, belt width 50 mm, in acc. with DIN EN 12195-2, Length 8000 mm (7500 + 500 mm), Only for lashing, not for lifting loads	8000			3,4	990013
	Pallet for deck props load 1750 kg, galvanised	835	1520	1020	64,0	697599

NOEprop

	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
	NOEprop 580 (D 55) extendible: 4000-5800 mm permissible load 80.5-22.2 kN Technical Approval Z - 8,312 - 918	4000- 5800			34,3	697553
	NOEprop 400 (E 40) extendible: 2200-4000 mm permissible load 161.6-34.1 kN Technical Approval Z - 8,312 - 918	2200- 4000			26,3	697552
	NOEprop 300 (T 30) extendible: 1900-3000 mm permissible load 160.6-63.9 kN Technical Approval Z - 8,312 - 918	1900- 3000			20,7	697551
	NOEprop adapter each butt joint requires 4 bolts M 16x50 8.8 DIN 933 with washer and nut (Part No. 313500)	3600 1800			17,2 9,2	697558 697559
	Bolt M 16x50 8.8 with nut and washer, galvanised Hire only! For purchase see price list for formwork and scaffold accessories.				0,1	313500

	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
	Adapter for NOEprop deck prop for use with NOEprop props / ADS props NOEtable swivelling head. 4 No. bolts M 16x40 with nut and washer, Part No. 313400 are needed. Galvanised	170	160		3,1	699010
	Bolt M 16x40 with nut and washer, galvanised Hire only! For purchase see price list for formwork and scaffold accessories.				0,1	313400
	Strut connection head bearing The strut connection allows to the head bearing of the light support frame. Supports such as NOEprop, ADS and BKS. The supports can be inclined up to 20 ° to the vertical formwork.	190	190	142	3,8	541060

NOEprop frame with NOEclamp

	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
	NOEprop frame with NOEclamp		2400	955	16,8	890886
	NOEprop frame with NOEclamp		2100	955	15,8	890890
	NOEprop frame with NOEclamp		1555	955	12,8	890885
	NOEprop frame with NOEclamp		955	777	9,5	890883

NOEprop frame without NOEclamp

to attach the support frame for supporting frame 4 NOEclamp, part no. 890850 needed

	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
	NOEprop frame without NOEclamp		2400	955	12,8	890871
	NOEprop frame without clamp		2100	955	11,8	890870
	NOEprop frame without NOEclamp		1555	955	9,5	890865
	NOEprop frame without NOEclamp		955	777	7,4	890863
	NOEprop installation frame	2100	750	12,9		890896
	4 NOEclamps, part no. 890854, are required for connection to NOEprop props	1555	955	7,8		890897
	NOEclamp for NOEprop installation frame				1,1	890854

NOEprop supplementary parts

	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
	NOEclamp If the NOEclamp be held captive to the support frame, each support frame for 4 NOEclamp following material is required: 4 NOEprop spring pin (part. no. 890852) 4 Cylindrical bolt M 8x50 (part. no. 369000) 4 Washer 10.5 (part. no. 389002) 8 Washer shape A 8.4 (part. no. 380018) 4 Hexagonal nut M 8 (part. no. 370016)				0,8	890850
	NOEprop spring pin				0,0	890852

Cylindrical bolts



	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
	Cylindrical bolt M 8x50 DIN 7984, 8.8, galvanised, packaging unit 200 No.				4,4	369000
	Washer 10.5 DIN 433, galvanised, packaging unit 1000 No.				1,0	389002
	Washer shape A 8.4 DIN 125, galvanised, packaging unit 1000 No.				2,1	380018
	Hexagonal nut M 8 DIN 934, 8.0, galvanised, packaging unit 1000 No.				4,7	370016

NOEprop accessories


	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
	Folding tripod 85-120 with clip fastening usable with all commonly available props of 85- 120 mm Ø, galvanised				13,5	900073
	NOEprop spanner galvanized				3,2	391900
	Fork head galvanised				4,1	110715
	Pallet for NOEprop props				68,0	697597

NOE ADS deck prop

aluminium, deck prop), Approval No. Z-8,312-826, prop class E, load 30 kN for extended lengths up to 5000 mm not for purchase, **only for hire**

	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
	ADS prop A extendible: 1950-2750 mm	1950- 2760			18,4	697510
	ADS prop B extendible: 2750-5000 mm	2750- 5000			28,6	697511
	Plate for aluminium prop without safety spring				2,4	890980
	Safety spring for plate for aluminium prop				0,1	912400

NOE ADS prop accessories

	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
	ADS folding tripod galvanised				15,4	890951
	ADS Telescopic tripod for ADS prop, galvanised for hire only				23,0	890950

Euro-props E with attached drophead

incl. 2 attachment bolts M 10x40 Part No. 311100

Description	Length mm	Height mm	Surface m ²	Weight approx. kg	Part No.
Euro-prop E 25 with attached drophead extendible: 1700-2500 mm + 360 mm			0,01	22,8	447425
Euro-prop E 30 with attached drophead extendible: 1800-3000 mm + 360 mm			0,01	26,6	447430
Euro-prop E 35 with attached drophead extendible: 2100-3500 mm + 360 mm			0,01	31,5	447435
Euro-prop E 40 with attached drophead extendible: 2350-4000 mm + 360 mm			0,01	34,9	447440

NOEprop with attached drophead

incl. 2 attachment bolts M 16x40 (Part No. 313400)





Description	Length mm	Height mm	Surface m ²	Weight kg / m ²	Part No.
NOEprop 580 (D55) with attached drophead extendible: 4000 - 5800 mm + 360 mm		5800	0,01	42,8	447553
NOEprop 400 (E40) with attached drophead extendible: 2200 - 4000 mm + 360 mm		4000	0,01	34,8	447552
NOEprop 300 (T30) with attached drophead extendible: 1900 - 3000 mm + 360 mm		3000	0,01	29,2	447551

ADS props with attached drophead






incl. 2 attachment bolts M 16x40 (Part No. 313400)

Description	Length mm	Height mm	Surface m ²	Weight approx. kg	Part No.
Prop A with attached drophead extendible: 1950-2760 mm + 360 mm			0,01	25,4	447510
Prop B with attached drophead extendible: 2750-5000 mm + 360 mm,			0,01	35,6	447511

NOE AB 300 working platform


	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
	Working platform 6000 mm completely assembled, incl. 3 brackets, support tube, boarding (coated, 60 mm thick), guard rail (steel frame element), steel parts galvanised	6000	2200		1030,0	557250
	Working platform 4000 mm completely assembled, incl. 2 brackets, support tube, boarding (coated, 60 mm thick), guard rail (steel frame element), steel parts galvanised	4000	2200		652,0	557252
	Working platform with hatch 4000 mm with hatch to lower platform, attachment of an external corner or extension possible, completely assembled, steel parts galvanised, incl. 2 brackets, support tube, boarding (coated, 60 mm thick), guard rail (steel frame element), steel parts galvanised	4000	2200		758,0	557254
	Extension left only for working platform with hatch, extension 200-500 mm in 50-mm module		200-500		39,3	557270
	Extension right only for working platform with hatch, extension 200-500 mm in 50-mm module		200-500		39,3	557268
	Boarding for extension pine 21 mm, indicate extension length when ordering				55,6	557272

NOE AB 300 corner solutions


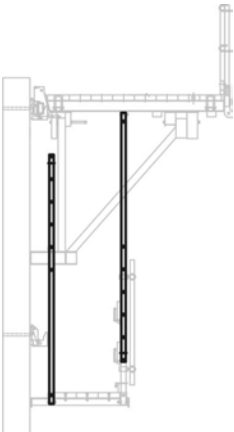

	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
	Internal corner working platform 6000 mm used as left or right internal corner, completely assembled, steel parts galvanised, incl. 3 brackets, support tube, Boarding (coated, 60 mm thick), Guard rail 4000 mm long (steel frame element)	6000	2200		970,0	557266
	External corner working platform 4000 mm an external corner left or right can be attached completely assembled, incl. 2 brackets, support tube, boarding (coated, 60 mm thick), guard rail (steel frame element), steel parts galvanised	4000	2200		720,0	557256
	External corner unit can be inserted into a working platform for external corner 4000 mm (Part No. 557256), Working platform with hatch 4000 mm (Part No. 557254), usable as left or right, steel parts galvanised, consisting of: 1 steel boarding 1 slot-in tube 1650 mm 1 slot-in tube 2050 mm are additionally required: 3 spring pins (Part No. 555990), 1 guard rail I (Part No. 557222), 2 guard rails II (Part No. 557223)	1400	1400		115,0	557262
	Guard rail I for external corner unit can be inserted into external corner unit, galvanised				20,4	557222
	Guard rail II for external corner unit can be inserted into external corner unit, each external corner unit requires 2 No., galvanised				20,9	557223
	Spring pin 12x80 mm, galvanised				0,1	555990

	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
	Bottom bearing stabilizer AB 300 galvanised				4,6	557246
	Bottom support adapter plate AB300 galvanised				3,6	557276

NOE AB 300 connecting platform




	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
	Connecting platform for bridging up to 1000 mm, incl. guard rail, steel parts galvanised	1800	1845		186,6	557264



Lower platform

	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
	Lower platform completely assembled, with boarding, steel parts galvanised purchase only	6000 4000	970 970		314,0 186,0	557260 557258
	Suspension tube for connecting the lower platform with the working platform, galvanised purchase only	4500 2750			19,7 12,0	557215 557214
	guard rail galvanised purchase only	1765			8,7	557221



	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
	Hexagonal bolt M 16x100 DIN 931, 8.8, galvanised, packaging unit 25 No.				4,7	360264
	Hexagonal nut M 16 DIN 934, 8.0, galvanised, packaging unit 200 No.				6,0	370024
	Washer shape A 17 DIN 125, galvanised, packaging unit 250 No.				2,8	380026
	Bolt M 16x100 with nut and washer, galvanised Hire only! For purchase see price list for formwork and scaffold accessories.				0,2	314000
	Bolt M 16x80 with nut and washer, galvanised Hire only! For purchase see price list for formwork and scaffold accessories.				0,2	313900
	Bolt M 16x60 10.9 With nut Hire only! For purchase see price list for formwork and scaffold accessories.				0,2	313600
	Scaffold tube	6000			30,4	506000
	48.3 X 3.25 mm, DIN EN 39, galvanised	5500			24,2	505500
		5000			22,0	505000
		4500			19,8	504500
		4000			17,6	504000
		3500			15,4	503500
		3000			13,2	503000
		2500			11,0	502500
		2000			8,8	502000
		1500			6,6	501500
		1000			4,4	501000
	Coupler 48/60 EN 74-2, swivelling, galvanised				1,8	510600
	Guard rail board	6000			27,6	557225
		4000			18,3	557224
	Board	6000			10,4	557227
		4000			6,9	557226

NOE AB 300 suspension hook

	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
	Suspension hook I for anchor bolt, scaffold bolt M 36, tie cone, galvanised				14,1	557217
	Anchor bolt M 36x430 for bolt M 36				4,2	811900
	Bolt M 36x60 8.8 galvanised				0,5	318200
	Plastic tube Ø 42 mm	lfm			0,5	692910
	Plug SFL 42 black packaging unit 250 No.				1,3	693910
	Nail plate for anchor bolt M 36 reusable, steel, unscrewing the nail plate requires a half-inch ratchet spanner, square 13/13				0,3	811992
	Socket M 36 wrench, SW 46, 1" drive				0,6	811911
	Square insert M 36 for socket M 36 Part No. 811911 for releasing screw anchor, Part No. 811900				0,7	811905
	Scaffold bolt M 36	400			5,6	461907
	with waling plate 100x100x20	350			5,0	312680
	and hexagonal nut,	300			5,0	312670
	length = wall thickness,	250			4,2	312660
	other dimensions on request	240			4,2	312650
		220			4,2	312640
		200			4,2	312630
		180			4,2	312620
		150			4,2	312610

	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
	Tie cone cone 2-part, permissible tensile force 90 kN (in acc. with DIN 18216), Minimum wall thickness 300 mm	110			0,6	686900
	Tie rod Ø 15 mm part no. 67 ... with length in mm added, galvanised				1,47/m	67
	Tie rod Ø 15 mm part no. 76 ... with length in mm added, ungalvanised				1,47/m	76
	Counterplate lost installation part				1,9	557213
	Sprint nut galvanised	80	80	60	0,7	680580
	Steel cone For use as removable cone				1,5	557212
	Bolt Tr 26x55 SW 55, galvanised	60			0,6	822400
	Nail plate for tie cone with tie rod thread, Ø 15 mm, for tie cone (Part No. 686900)				0,0	811991
	Spanner for nailing plat e for nail plate with tie cone (Part No. 811991)				0,4	466712

NOE retracting device (purchase only)

	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
	Support tube for panel galvanised		100	3012	39,2	557234
	Runner galvanised	1620	340		52,5	557243
	Wheel flange plate galvanised	50	122	170	1,3	557241
	Wheel flange roller				0,1	557244
	Bottom spindle mount galvanised	150	80	76	3,3	557237
	Spindle galvanised	54	54	310	3,3	557238
	Guide roller		45		0,2	557245
	Front safety fastening galvanised	195	340	140	4,1	557239
	Back fixing galvanised	270	62	60	1,2	557233
	Bolts for AB 300 clamp pocket and AB 300 spindle pocket	190			0,6	557232

	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
	Fastening bow for NOEtop galvanised	401	138	172,5	3,5	557242

Hex-head bolt DIN 933

	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
	Hexagonal bolt M 16x40 DIN 933, 8.8, galvanised, packaging unit 50 No.				4,5	362344

Hex-head bolt DIN 931

	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
	Hexagonal bolt M 20x100 DIN 931, 8.8, galvanised, packaging unit 25 No.				7,6	360366
	Hexagonal bolt M 20x120 DIN 931, 8.8, galvanised, packaging unit 25 No.				8,8	360370
	Hexagonal bolt M 20x140 DIN 931, 8.8, galvanised, packaging unit 25 No.				10,0	360374

Hexagonal nuts

	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
	Hexagonal nut M 16 DIN 934, 8.0, galvanised, packaging unit 200 No.				6,0	370024



Safety nut

	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
	Safety nut M 20 DIN 985, 8.0, galvanised, packaging unit 100 No.				6,5	373016



Plain washer


	Description	Ø mm	Width mm	Height mm	Weight approx. kg	Part No.
	Washer shape A 17 DIN 125, galvanised, packaging unit 250 No.	17,0			2,8	380026
	Washer shape A 21 DIN 125, galvanised, packaging unit 250 No.	21,0			4,3	380030
	Shaft safety ring A 15 DIN 471, galvanised, packaging unit 1000 No.				1,0	389004

Safety device for wind loads


	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
	Fork each fastening requires 2 No and 2 bolts M 24x160 (Part No. 318100)	210	70		2,4	557219
	Bolt M 24x160 grade 10.9, with nut and washer, each connection point requires 2 No., black				0,7	318100
	Tension tying spindle each fastening requires 1 No., and 4 hexagonal nuts (Part No. 680900)				9,8	557208
	Hexagonal nut 30 with standard tie rod internal thread galvanised	30			0,1	680900
	Tie rod Ø 15 mm part no. 67 ... with length in mm added, galvanised	400			1,47/m 0,6	67 670400
	Belt with ratchet 2.5 T ratchet belt with snap hook, belt width 50 mm, in acc. with DIN EN 12195-2, Length 8000 mm (7500 + 500 mm), Only for lashing, not for lifting loads	8000			3,4	990013

Accessories

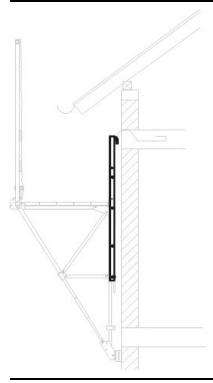
	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
	Handrail clamp 1.00 m clamping range 50 to 400 mm, range of application up to 40 m above ground, max. spacing 2.00 m, galvanised, Hire only!				7,2	900050
	Guard rail clamp 1.40 m clamping range 30-820 mm, galvanised				14,2	900052
	Guard rail extension for protection net incl. spring pins 12x80 mm (Part no. 555900), a 6000 mm long platform requires 3 extensions, for a 4000 mm long platform 2 extensions are required, galvanised				13,3	557220
	Safety net	10000	2000		7,3	556190
	with continuous edge rope and integral belt quick-release fastener at a distance of 1000 mm, mesh size 100x100 mm, approved by BG Bau.	5000	2000		3,7	556180
	purchase only					
	Scaffold tube	6000			30,4	506000
	48.3 X 3.25 mm, DIN EN 39, galvanised	4000			17,6	504000
	Wedge clamping collar for inserting into the guard rail extension, for fastening scaffold tubes, galvanised				1,1	556170


	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
	Formwork safety restraint for beam formwork if a travelling device is not used, complete, incl. bolt per climbing bracket for safety in windy conditions by connecting the wall formwork to the climbing bracket				2,8	557216
	Tube spanner SW 55 for scaffold bolt M 36, hexagonal bolt M 36x60, bolt Tr 26				1,2	390355
	Tube spanner SW 36 for bolt Tr 26x5				0,7	390350
	Pipe-head shaped key SW 32 for tie cone SW 32 (Part No. 686900)				1,6	394901
	Key for steel cone for the removal of steel cones (Part No. 557212) and nail plates (Part No. 811991)				1,2	811920
	Open spanner SW 36 for i=tightening/releasing the M 24 bolts providing wind restraint				0,4	390900
	Bottom bearing stabilizer AB 300 galvanised				4,6	557246
	Bottom support adapter plate AB300 galvanised				3,6	557276

Scaffold units

	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
	Scaffold units	5000	1400		393,0	556950
	completely assembled in acc.	4000	1400		293,0	556940
	with AuV NOE hinged walkway	3500	1400		273,0	556935
	bracket scaffold, steel parts	3000	1400		250,0	556930
	galvanised	2500	1400		225,0	556925
		2000	1400		210,0	452325
	Bracket corner left completely assembled in acc. with AuV NOE hinged walkway bracket scaffold, steel parts	2800	1400		329,0	556917
	Bracket corner right completely assembled in acc. with AuV NOE hinged walkway bracket scaffold, steel parts	2800	1400		329,0	556918
	Corner unit unassembled, consisting of: 2 folding brackets 1 coupling piece Boarding frame with installed boards 2 guard rails 2 board holders 11 guard rail boards and all assembly and connection parts, steel parts galvanised. Each corner unit also requires 6 flat-headed bolts M 8x130 with nut and washer	375	375		300,0	556999

Hinged NOE walkway bracket scaffold accessories



	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
	Bridging platform for covering the openings between scaffold units, each bridging platform requires 4 guard rail holders	3000	1220		125,0	556915
	Guard rail holder for bridging platform, guard rail boards inserted on site, galvanised				2,8	556916
	Mounting extension for 460 or 910 mm deeper suspension of scaffold units at projecting roofs, galvanised				34,7	556160
	Base extension for use at building openings. From suspension point to base point extendible from 2650 mm up to 4050 mm, incl. 5 hexagonal bolts M 12x90, each bracket requires 1 extension, self-locking, galvanised				41,6	556110
	Bolt M 12x90 DIN 601 Hire only! For purchase see price list for formwork and scaffold accessories.				0,2	311600
	Guard rail extension for roof work. Each bracket requires 2 guard rail extensions. 4 spring pins are required per bracket if the extension with the long leg in used below, galvanised				15,1	556100

	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
	Spring pin 12x80 mm, galvanised				0,1	555990
	Safety net with continuous edge rope and integral belt quick-release fastener at a distance of 1000 mm, mesh size 100x100 mm, approved by BG Bau.	10000 5000	2000 2000		7,3 3,7	556190 556180
	purchase only					
	Scaffold tube 48.3 X 3.25 mm, DIN EN 39, galvanised	5500 5000 4500 4000 3500 3000 2500 2000 1500 1000			24,2 22,0 19,8 17,6 15,4 13,2 11,0 8,8 6,6 4,4	505500 505000 504500 504000 503500 503000 502500 502000 501500 501000
	Coupler 48/48 EN 74-1, swivelling, galvanised				1,3	510300
	Coupler 48/60 EN 74-2, swivelling, galvanised				1,8	510600
	Wedge clamping collar for inserting into the guard rail extension, for fastening scaffold tubes, galvanised				1,1	556170
	Handrail clamp 1.00 m clamping range 50 to 400 mm, range of application up to 40 m above ground, max. spacing 2.00 m, galvanised, Hire only!				7,2	900050
	Guard rail clamp 1.40 m clamping range 30-820 mm, galvanised				14,2	900052

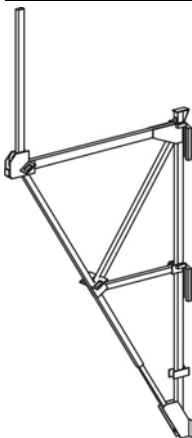
Flat-headed bolt

	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
	Flat-headed bolt M 8x130 DIN 603, 4.6, galvanised, packaging unit 100 No				6,2	364112
	Hexagonal nut M 8 DIN 934, 8.0, galvanised, packaging unit 1000 No.				4,7	370016
	Washer shape A 8.4 DIN 125, galvanised, packaging unit 1000 No.				2,1	380018

Anchor


	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
	Suspension hook Ø 10/100 BST 420 S, for suspending the walkway bracket scaffold, ungalvanised, 2 No. are required for each suspension point				1,2	556140
	Suspension shoe for suspension of walkway bracket scaffold, hole Ø 32 mm, anchorage in the deck slab or concrete wall, galvanised.				7,1	556120
	Scaffold bolt M 27	350			3,2	312570
	incl. hexagonal nut, length to suit	300			3,2	312560
	wall thickness, galvanised.	250			3,1	312550
		240			3,2	312540
		220			2,8	312530
		200			2,8	312520
		180			2,8	312510
		150			2,8	312500
	Spacer washer for M 27 Ø 30/50 mm, 4 mm thick, DIN 126, galvanised Hire only! For purchase see price list for formwork and scaffold accessories.				0,1	317700
 	Anchor sleeve Ø 26.5 for DYWIDAG bolts, in acc. with approval No. Z-21.6-1744, galvanised	220			0,1	810252
 	Anchor bolt Ø 26.5 for anchor sleeve Ø 26.5 mm, clamp length 200 mm, SW 46, in acc. with approval No. Z-21.6- 1744, galvanised	230			1,4	810254
	PVC plastic plugs for hole Ø 28 mm, anchor cap for sealing anchor bolt holes of the anchor sleeve Ø 26.5 mm, Part No. 810252, with fins, domed head, Ø 32 mm, colour mousy grey [693406]=50 pieces			12	0,1	693406
	Tube spanner SW 41/46 for anchor bolt Ø 26.5 mm				0,8	394500

Walkway bracket scaffold, individual parts

	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
	Folding bracket single, galvanised				51,0	556000
	Clip required if the folding bracket is used singly. Each bracket requires 1 clip, galvanised				0,2	911500
	Spring pin 12x80 mm, galvanised				0,1	555990


LG-W 200 column

with pipe connector, screwed

	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
	LG-W 200 column		1090	1500	23,6	890815
	connection of the column at each		1090	1360	23,0	890813
	rod by 2 LG-W 200 plugs (Part No.		1090	750	16,3	890811
	890834)					

LG-W 200 column

without pipe connector

	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
	LG-W 200 column		1090	1500	21,8	890814
	connection of the column at each		1090	1360	22,1	890812
	rod by tube connector (Part No.		1090	750	14,5	890810
	890828) and 2 LG-W 200 plugs (Part No. 890834)					


LG-W 200 diagonals

	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
	LG-W 200 diagonal	1600			5,4	890818
		1200			4,3	890816
	LG-W 200 stiffening		1090		3,8	890822
	LG-W 200 diagonal		1540		5,9	890826

LG-W 200 Head / foot spindle

	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
	LG-W 200 head spindle 160 Max. spindle extension 250 mm				7,5	890830
	LG-W 200 base spindle Max. spindle extension 250 mm				6,8	890831

LG-W 200 accessories

	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
	LG-W 200 tube connector				0,9	890828
	LG-W 200 bolt M 10x60 With nut and washer Hire only! For purchase see price list for formwork and scaffold accessories				0,0	890835
	LG-W 200 plug 9 mm galvanized				0,1	890834
	LG-W 200 Mounting base for shoring	580	1090		9,0	890840
	Belt with ratchet 2.5 T ratchet belt with snap hook, belt width 50 mm, in acc. with DIN EN 12195-2, Length 8000 mm (7500 + 500 mm), Only for lashing, not for lifting loads	8000			3,4	990013

	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
	LG-W 200 ladder	1650	430	135	4,5	890819
	LG-W 200 Transfer truck Transfer truck for LG-W 200 towers, painted the 890803 fork mount is also required	1800	1850	1280	225,0	890802
	LG-W 200 Fork mount	1600	1160	1140	91,0	890803

NOE AR mobile scaffold

	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
	FG castor 7 kN, braked				7,8	868450
	AR collar				1,4	868030
	AR collar long				2,2	868031
	AR standard with spigot	4000			18,1	868006
		3000			15,5	868005
		2500			13,5	868004
		2000			9,3	868003
		1000			6,4	868001
	AR O locking bar steel	2070			7,0	868110
		1090			4,0	868106
	AR diagonal brace steel	2810			8,9	868205
		2250			7,0	868202
	AR O toe board	2070	150		4,3	868164
		1090	150		2,5	868161
	wood					
	AR O steel deck steel	2070	320		16,0	868305
	AR O access deck	2070	610		17,7	868336
	Aluminium					
	AR lynch pin for tubes Ø 12 mm				0,1	868021

	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
	AR platform access ladder 7 rungs				8,7	868340
	AR spindle fixture with wedge head				2,0	868044
	Scaffold tube 48.3 X 3.25 mm, DIN EN 39, galvanised	2500			11,0	502500
	Coupler 48/48 EN 74-1, swivelling, galvanized				1,3	510300

NOE AR modular stair tower

	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
	AR base spindle 60 Solid, no adjuster, max. spindle travel 410 mm				6,7	868043
	AR TG spindle holder				0,8	868055
	AR standard Standard LW, steel, 2.21 m with 5 rosettes	2210			10,0	868015
	AR O locking bar steel	2570			8,5	868111
		1400			5,0	868108
	AR diagonal brace steel	3180			9,5	868206
		2400			7,5	868203
	AR steps Aluminium, steps class B in acc. with EN 12811-1 O-version 2.0 kN/m², riser 220 mm	2570	640	2000	29,2	868420
	AR stair internal guard-rail Steel, galvanised Rules for dog-leg stairs			2000	13,5	868425
				1500	11,5	868427

	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
	AR lynch pin for tubes Ø 12 mm				0,1	868021
	AR O steel deck steel	2570	320		18,9	868306
	AR standard with spigot	1000			6,4	868001
	AR guard rail posts For continuous protection at the top of the stairs			1300	6,1	868430
	AR O locking bar As continuous protection at the top of the stairs with wedge head and U-fork	1900			7,8	868431
	AR crane eye				3,5	868451
	ZB scaffold anchor	950			3,7	868441
	Scaffold tube 48.3 X 3.25 mm, DIN EN 39, galvanised	3500			15,4	503500
	Coupler 48/48 EN 74-1, swivelling, galvanized				1,3	510300
	Coupler 48/48 rigid EN 74-1, rigid, galvanized				1,3	510310
	Scaffold eye bolt 12x120 mm				0,0	868445
	Dowel Fi S14 ROE 100 25 No				0,4	868446

NOE AR site stair tower 200

	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
	AR base spindle 80				4,9	868041
	Reinforced					
	AR collar				1,4	868030
	AR collar long				2,2	868031
	AR spindle fixture with wedge head				2,0	868044
	AR standard	4000			18,1	868006
	with spigot	2000			9,3	868003
		1000			6,4	868001
	AR lynch pin for tubes Ø 12 mm				0,1	868021
	AR O locking bar steel	2570			8,5	868111
		1090			4,0	868106
	AR O locking bar	1090			9,0	868410
	To cover gap in deck					


	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
	AR diagonal brace	3180			9,5	868206
	steel	2250			7,0	868202
	AR O stair stringer 200 10 steps				28,4	868400
	AR O steel deck steel	1090	320		9,4	868301
	AR crane eye				3,5	868451
	ZB scaffold anchor	950			3,7	868441
	Coupler 48/48 EN 74-1, swivelling, galvanized				1,3	510300
	Coupler 48/48 rigid EN 74-1, rigid, galvanized				1,3	510310
	Scaffold eye bolt 12x120 mm				0,0	868445
	Dowel Fi S14 ROE 100 25 No				0,4	868446

NOE AR framework for NOEtable transfer truck

	Description	Length mm	Width mm	Height mm	Weight kg / m ²	Part No.
	AR standard	2000			9,3	868003
	with spigot	3000			15,5	868005
		4000			18,1	868006
	ARO locking bar steel	900			4,0	868104
		2070			7,0	868110
	AR diagonal brace steel	2200			7,4	868218
		2810			8,9	868205
	Longitudinal girder	250	50	2500	18,0	867121
	AR Cross-beam	240	48	948	6,8	867122
	LG-W 200 plug 9 mm galvanized				0,1	890834



Tie rod Ø 15 mm


Rods, core Ø 15 mm, external Ø 17 mm, permissible tensile load 90 kN (in acc. with DIN 18216).

	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
	Tie rod Ø 15 mm ungalvanised	500			0,7	760500
		600			0,8	760600
		750			1,1	760750
		950			1,3	760950
		1000			1,4	761000
		1250			1,8	761250
		1500			2,1	761500
		1750			2,5	761750
		2000			2,8	762000
		2250			3,2	762250
		2500			3,5	762500
		2750			3,9	762750
		3000			4,2	763000
		3250			4,6	763250
		3500			4,9	763500
		3750			5,3	763750
		4000			5,6	764000
		4250			6,0	764250
		4500			6,3	764500
		4750			6,7	764750
		5000			7,0	765000
		5250			7,4	765250
		5500			7,7	765500
		5750			8,1	765750
		6000			8,4	766000
		6250			8,8	766250
		6500			9,1	766500
		6750			9,5	766750
		7000			9,8	767000
		7250			10,2	767250
		7500			10,5	767500



	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
	Tie rod Ø 15 mm	300			0,4	670300
	capped, galvanised	400			0,6	670400
		500			0,7	670500
		600			0,8	670600
		750			1,1	670750
		950			1,4	670950
		1000			1,4	671000
		1250			1,8	671250
		1500			2,1	671500
		1750			2,5	671750
		2000			2,8	672000
		2250			3,2	672250
		2500			3,5	672500
		2750			3,9	672750
		3000			4,2	673000
		3250			4,6	673250
		3500			4,9	673500
		3750			5,3	673750
		4000			5,7	674000
		4250			6,0	674250
		4500			6,4	674500
		4750			6,7	674750
		5000			7,1	675000
		5250			7,4	675250
		5500			7,8	675500
		5750			8,1	675750
	Rod with tie rod thread and end plate	1000	80	15	2,9	117242

Tie rod nut for tie rods Ø 15 mm

	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
	NOEtop EinsA Fixlager Support plate on the positioning side of the formwork, use with large panels NOEtop with integrated reinforcement, allows unilateral clamping with Schwupp tension rod Ø 15mm, galvanized	168	120		2,7	680045
	NOE EinsA magnetic bearings Magnetization / grade N35 NiCuNi coating Holding force approx. 35 kg Max. Operating temperature 80 ° C	182	119	133	2,8	680060
	NOEtop EinsA Distance compensation				0,8	680052
	Sprint nut galvanised	80	80	60	0,7	680580
	Plate nut Ø 130 mm, galvanized				0,9	680590
	Hexagonal nut 60 with standard tie rod internal thread galvanized	60			0,3	681000
	Hexagonal nut 30 with standard tie rod internal thread galvanized	30			0,1	680900
	Waling plate with wing nut bearing area 140x100 mm, galvanized	100	140		1,4	691700
	Waling plate hole Ø 32 mm, forged, galvanized,	200	140		1,7	691200
	Waling plate pressed, hole Ø 20 mm, galvanized	120	120		1,1	691400

	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
	Square nut weldable	60			0,3	681300
	Tie rod coupler nut Ø 15 mm A/F size 30, permissible tensile force 90 kN, galvanised	105			0,5	684000
	Screw base for tie-rod Ø 15 mm, hole Ø 17 mm, weldable, permissible. tensile load 70 kN				0,4	117240
	Triangle tying plate permissible tensile force 64 kN				3,1	682500


Cones for tie rods Ø 15 mm

	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
	Tie cone cone 2-part, permissible tensile force 90 kN (in acc. with DIN 18216), Minimum wall thickness 300 mm	110			0,6	686900
	Tie cone conical plastic shell				0,1	686901
						
	Tie cone steel insert				0,6	686902
	Nail plate for tie cone with tie rod thread, Ø 15 mm, for tie cone (Part No. 686900)				0,0	811991
	Waterstop Ø 65 mm, permissible tensile force 90 kN Each waterstop requires 2 waterstop connection couplers, Part No. 682203	112			0,6	682202
	Waterstop coupler 2 pieces are required per waterstop coupler material PE				0,0	682203

Formwork joint tape


	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
	PU formwork joint tape PU, 19 x 6 mm, 10 m roll	10000	19	6	0,1	840492

Tools for tie rod Ø 15 mm

	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
	Spanner SW 30				0,5	394300
	Extension tube for spanner, SW 30	600			1,1	394400
	Pipe-head shaped key SW 32 for tie cone SW 32 (Part No. 686900)				1,6	394901
	Key for steel cone for the removal of steel cones (Part No. 557212) and nail plates (Part No. 811991)				1,2	811920
	Spanner for nailing plate for nail plate with tie cone (Part No. 811991)				0,4	466712

Tie rod Ø 20 mm

Not weldable! Observe approval document information! Core Ø 20 mm, external Ø 22.5 mm
permissible tensile load 150 kN (in acc. with DIN 18216),

	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
	Tie rod Ø 20 mm	2500			6,4	672509
	galvanised	1750			4,6	671759
		1500			3,8	671509
		1250			3,2	671259
		950			2,4	670959

Tie rod nut for tie rods Ø 20 mm

	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
	Waling plate with wing nut galvanised	140	110		1,1	691600
	Tying nut Ø 20 mm Galvanised				0,5	680009

Watertight tie rod Ø 20 mm


	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
	Coupler nut Ø 20 mm, SW 36, permissible tensile load 160 kN	140			0,7	682220
	Tie cone Ø 20 mm, complete cone 2-part, permissible tensile force 90 kN (in acc. with DIN 18216), minimum wall thickness 300 mm				0,5	686910
	Tie cone Ø 20 mm, steel insert				0,5	686911
	Tie cone conical plastic shell				0,1	686901

Tie rod Ø 26.5 mm





Core Ø 26.5 mm, external Ø 30.0 mm, rolled, weldable, load 280 kN

	Description	Length mm	Width mm	Height mm	Part No.	Weight approx. kg
	Tie rod Ø 26.5 mm galvanised	950			660951	4,3




Tie rod nut for tie rods Ø 26.5 mm





	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
	Tie rod coupler nut Ø 26.5 mm with tie rod thread, SW 46, load 300 kN, galvanised	150			1,4	682230
	Tying nut Ø 26.5 mm load 260 kN, galvanised				0,9	680010
	Waling plate bearing area 150x150 mm, hole Ø 32 mm, load 300 kN	150	150	35	5,7	691510





Tie rod accessories

	Description	Ø mm	Length mm	Width mm	Weight approx. kg	Part No.
	NOE FixCone consisting of a support cone and a centring cone for plastic tube with internal Ø 22 mm Packaging unit 250 No.				2,9	693810
	Corner tie plate for tie rod Ø 15 mm, for tying external corners, painted, attachment for example with M 16x30 [313200]				1,9	926110
	Plastic tubes circular internal Ø 42 mm	42,0	3000		1,5	692012
	Plastic tubes circular internal Ø 34 mm	34,0	2000		1,0	692002
	Plastic tubes circular internal Ø 26 mm	26,0	2000		0,7	692801
	Support cone 26 mm for plastic tube with internal Ø 26 mm [694211]=250 pieces	26,0			1,3	694211
	Plastic tubes circular internal Ø 22 mm	22,0	2000		0,6	692004
	Support cone 22 mm for plastic tube with internal Ø 22 mm [694212]=250 pieces	22,0			1,5	694212
	Plastic tubes circular internal Ø 20 mm	20,0	2000		0,6	692000
	Plastic tubes internal Ø 20 mm	20,0	2000		0,5	692006
	Support cone 20 mm for plastic tube with internal Ø 20 mm, [694210]=250 pieces	20,0			1,3	694210


NOE Plugs

	Description	Ø mm	Length mm	Height mm	Weight approx. kg	Part No.
	PVC plastic plug ST 20 for hole Ø 20 mm, for sealing sleeves, conical, without head, colour dark grey, packaging unit 250 No.	20,0		20	0,5	693800
	PVC plastic plug ST 22 for hole Ø 22 mm, for sealing sleeves, conical, without head, colour dark grey, packaging unit 250 No.	22,0		20	0,8	693400
	PVC plastic plugs ST 26 for hole Ø 26 mm, to seal tie rod holes in external corner panels of NOEtop and NOE Top Alu, conical, without head, colour light grey, packaging unit 60 No.	26,0		21,7	0,3	693620
	PVC plastic plugs ST 32 for hole Ø 32 mm, for sealing sleeves, conical, without head, colour grey, packaging unit 250 No.	32,0		26	1,3	693700
	PVC plastic plugs ST 34 for hole Ø 34 mm, for sealing sleeves, conical, without head, colour grey, packaging unit 250 No.	34,0		23,8	1,3	693200


	Description	Ø mm	Length mm	Height mm	Weight approx. kg	Part No.
	PVC plastic plugs SFL 23 for hole Ø 20 mm, to seal tie rod holes in NOEtop 60, NOE SL 2000 (panel height 1500 and 750 mm, upper row of holes), NOE Alu 2000, NOEtop Alu, NOEalu L (only for panels Part No. beginning with 4022., 4023..), with slats, domed head, Ø 23 mm, colour white packaging unit 250 No.	23,0		11	0,3	693900
	PVC plastic plugs SFL 25 for hole Ø 22 mm, to seal tie rod holes in NOElight, NOE SL, NOE SL 2000, NOEalu L (only for panels Part No. beginning with 4024..), and holes in external corner panels of NOE Top 2000, NOEtop 2000 light and NOE SL 2000, colour grey, packaging unit 250 No.	25,0		11,5	0,5	693500
	PVC plastic plugs SFL 30 for hole Ø 26 mm, to seal tie rod holes in NOEtop, NOE Top 2000 panels, NOE circular formwork panels, domed head, Ø 30 mm, colour white, packaging unit 250 No.	30,0		12	0,6	693409
	PVC plastic plugs SFL 30 with NOE-logo for hole Ø 26 mm, to seal tie rod holes in NOEtop, NOE Top 2000 panels, NOE circular formwork panels, domed head, Ø 30 mm, colour white, with NOE-logo packaging unit 250 No.	30,0			0,6	693515

	PVC plastic plugs for hole Ø 28 mm, anchor cap for sealing anchor bolt holes of the anchor sleeve Ø 26.5 mm, Part No. 810252, with fins, domed head, Ø 32 mm, colour mousy grey [693406]=50 pieces	32,0	12	0,1	693406
	PVC plastic plugs SFL 32 for hole Ø 28 mm, to seal tie rod holes in external corner panels of NOElight, NOEalu L and NOE Alu 2000, with fins, domed head, colour corn-yellow, packing unit 250 No.	32,0	12	0,8	693408
	PVC plastic plugs M 16 for sealing M 16 screw sockets, domed head, Ø 16 mm, colour light grey, Packing unit 250 pieces.	16,0		0,3	829100
	PVC plastic plug 17 mm for hole Ø 17 mm, for sealing tie rod holes, domed head, Ø 17 mm, colour light grey, packaging unit 250 No.	17,0	14	0,3	330600
	PVC plastic plugs Tr 26x5 for sealing Tr 26x5 screw sockets, flat head, Ø 29.5 mm, colour grey, packaging unit 250 No.	23,2	12	0,5	829000
	PVC plastic plugs for sealing Tr 26x5 screw sockets, flat head, Ø 34 mm, colour grey, packaging unit 250 No.	23,2	12	2,5	829010

NOE anchor sleeve installation parts

	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
 	NOE anchor cap D 15 Polyamide, FMFA approved, for tie rod Ø 15 mm Packaging Unit: 50 pieces				3,4	694901
	NOE nailing plate D 15 Polyamide Packaging Unit: 50 pieces				0,4	694903
	NOE nailing plug D 15 Polyamide Packaging Unit: 50 pieces				0,2	694902
	NOE plug D 15 Polyamide Packaging Unit: 50 pieces				0,1	694904
	NOEtop Connection bolt 100 thread length 100 mm, galvanised				0,3	135010

Anchor cap Ø 26.5 mm

	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
	Anchor sleeve Ø 26.5 for DYWIDAG bolts, in acc. with approval No. Z-21.6-1744, galvanised	220			0,1	810252
	Anchor bolt Ø 26.5 for anchor sleeve Ø 26.5 mm, clamp length 200 mm, SW 46, in acc. with approval No. Z-21.6- 1744, galvanised	230			1,4	810254
	PVC plastic plugs for hole Ø 28 mm, anchor cap for sealing anchor bolt holes of the anchor sleeve Ø 26.5 mm, Part No. 810252, with fins, domed head, Ø 32 mm, colour mousy grey [693406]=50 pieces			12	0,1	693406
	Tube spanner SW 41/46 for anchor bolt Ø 26.5 mm				0,8	394500

Suspension M 16

	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
	Ring bolt M 16, 1.5T, swivelling 360° swivel, loadable from all sides, load capacity label, spanner with ring bolt permanently attached, labelling of optimum load direction, load capacity: under vertical tension 4000 kg, under 90° load 1500 kg				0,3	821110

Safety nut

	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
	Safety nut M 16 DIN 985, 8.0, galvanised, packaging unit 200 No.				6,8	373012
	Washer shape A 17 DIN 125, galvanised, packaging unit 250 No.				2,8	380026



NOE Plugs


	Description	Ø mm	Length mm	Height mm	Weight approx. kg	Part No.
 	PVC plastic plugs M 16 for sealing M 16 screw sockets, domed head, Ø 16 mm, colour light grey, Packing unit 250 pieces.	16,0			0,3	829100

Stop end

	Description	Length mm	Width mm	Height mm	Weight kg / m ²	Part No.
	Shelf bracket 68cm assembled with foot sprint	510	200	686	9,0	530031
	Double headed earth nail 25 x 400 mm	476	50	50	2,0	530032

Anchor bolts

	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
	Anchor bolt M 24x280 for bolt M 24, reusable, galvanised.				1,1	811800
	Nail plate for anchor bolt M 24 GRP, conditionally reusable. Removal of the nail plate requires a square spanner 18/18.				0,0	811970
	Socket M 24 wrench SW 32, 1" drive				0,4	811811
	Square insert M 24 for socket M 24 Part No. 811811 for releasing screw anchor, Part No. 811800)				0,2	811805
	Anchor bolt M 36x430 for bolt M 36				4,2	811900

	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
	Nail plate for anchor bolt M 36 reusable, steel, unscrewing the nail plate requires a half-inch ratchet spanner, square 13/13				0,3	811992
	Socket M 36 wrench, SW 46, 1" drive				0,6	811911
	Square insert M 36 for socket M 36 Part No. 811911 for releasing screw anchor, Part No. 811900				0,7	811905

Bracing


	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
	Support spindle extendible 360-550 mm, load 70 kN, painted			360-550	9,5	697400
	Levelling jack 0-200 mm, load max. 10 kN, galvanised				5,0	350170
	Belt with ratchet 2.5 T ratchet belt with snap hook, belt width 50 mm, in acc. with DIN EN 12195-2, Length 8000 mm (7500 + 500 mm), Only for lashing, not for lifting loads	8000			3,4	990013
	Crane hook bow clear width 100 mm, load max. 9.0 kN, galvanised				1,3	330500


Cavity wall concreting bracket

	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
	Cavity wall concreting bracket for suspending on the internal or external sides of cavity walls, galvanised				13,2	552213
	PVC installation kit for cavity wall concreting bracket for placing onto the suspension pin, with special cap. Lost component, another must be placed on the pin before each use.				0,1	810060
	Cavity wall clip				3,2 5,0	552229 552232
	Shuttering rail	120	78	845	4,2	552224 552233

NOE guard rail

	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
	Handrail clamp 1.00 m clamping range 50 to 400 mm, range of application up to 40 m above ground, max. spacing 2.00 m, galvanised, Hire only!				7,2	900050
	Guard rail clamp 1.40 m clamping range 30-820 mm, galvanised				14,2	900052
	Handrail tube 1380 H 1380 mm high, tube Ø 33.7 mm, galvanised			1380	5,0	111403
	Handrail tube 1060 1060 mm high, tube Ø 33.7 mm, galvanised **hire only **			1060	4,0	111400
	LG-W 200 plug 9 mm galvanized				0,1	890834
	Bolting pin for handrail tube for handrail tube 1060/1380 H, 1380 GR and 1880 GR, 1600 OD 24 mm				0,8	111402
	NOE anchor cap D 15 Polyamide, FMPPA approved, for tie rod Ø 15 mm Packaging Unit: 50 pieces				3,4	694901



	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
	NOEsafe protective grille 2600 can be used with the railing tube part no. 507024	2600	1210	1500	19,8	507040
	NOEsafe railing tube 1450mm		1450		4,3	507024
	NOEsafe railing bracket galvanised	175	125	150	1,3	507020
	NOEsafe grille holder fitted	100	50	112	0,4	507029

Associated products

	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
	Scaffold tube	6000			30,4	506000
	48.3 X 3.25 mm, DIN EN 39, galvanised	5500			24,2	505500
		5000			22,0	505000
		4500			19,8	504500
		4000			17,6	504000
		3500			15,4	503500
		3000			13,2	503000
		2500			11,0	502500
		2000			8,8	502000
		1500			6,6	501500
		1000			4,4	501000
	Coupler 48/48 EN 74-1, swivelling, galvanized				1,3	510300
	Coupler 48/48 rigid EN 74-1, rigid, galvanized				1,3	510310
	Coupler 48/60 EN 74-2, swivelling, galvanized				1,8	510600
	Coupler 48/76 EN 74-2, swivelling, galvanized				2,2	510800
	Welded coupler 48mm EN 74-2				0,7	514000
	Welded coupler 60mm EN 74-2				1,1	514500
	Bolted coupler 48/M 16 EN 74-2, galvanized				0,8	514200
	Blade clamp for Ø 48-76 mm, galvanised Part No. 110722 = purchase only, Part No. 449600 = hire only				1,1	110722

Concreting spout

	Description	Length mm	Width mm	Height mm	Weight kg / m ²	Part No.
	NOEtec quick-release coupling 4,5"	210	160	40	2,1	615160
		250	240	250	6,8	615166
	NOEtec lip seal for quick-release coupling 4,5"	2415	450	60	0,0	615161
	NOEtec connection plate for concreting socket on NOEalu L galvanised	400	50	320	6,0	615162
	NOEtec compensation plate for concreting socket on NOEalu L galvanised	250	8	250	2,0	615163
	NOEtec connection plate for concreting socket NOEtop	410	50	380	9,2	615164
	NOEtec impact damper IW 100 4,5"	320	170	205	12,1	615165
	NOEtec concreting spout 642 mm with IW 100 impact damper 4,5"	250	240	250	6,8	615166
	NOEtec IW 100 concrete ejector 4,5"	126	126	1000	4,0	615167

Transport and Storage Container

	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
	NOEbox 1180 X 780 mm, for transporting small items, galvanised	800	1180	780	78,0	697598
	NOEcase 1200 x 800 mm Crane-type mesh box for transporting parts Load capacity: 1000 kg Load: 6000 kg Number of storage containers in the stack: max. 6 pieces galvanised	800	1200	1016	85,4	697591
	Pallet for deck props load 1750 kg, galvanised	835	1520	1020	64,0	697599
	Pallet for NOEprop props				68,0	697597

Hex-head bolt DIN 931

	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
	Hexagonal bolt M 8x40 DIN 931, 8.8, galvanised, packaging unit 200 No.				4,1	360064
	Hexagonal bolt M 8x80 DIN 931, 8.8, galvanised, packaging unit 200 No.				7,1	360078
	Hexagonal bolt M 8x100 DIN 931, 8.8, galvanised, packaging unit 100 No.				4,4	360086
	Hexagonal bolt M 12x60 DIN 931, 8.8, galvanised, packaging unit 100 No.				6,7	360162
	Hexagonal bolt M 12x85 DIN 931, 8.8, galvanised, packaging unit 50 No.				4,4	360170
	Hexagonal bolt M 12x90 DIN 931, 8.8, galvanised, packaging unit 50 No.				4,6	360172
	Hexagonal bolt M 16x50 DIN 931, 8.8, black, packaging unit 50 No.				5,4	361248
	Hexagonal bolt M 16x70 DIN 931, 8.8, galvanised, packaging unit 25 No.				3,5	360256

	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
	Hexagonal bolt M 16x80 DIN 931, 8.8, galvanised, packaging unit 25 No.				3,9	360258
	Hexagonal bolt M 16x90 DIN 931, 8.8, galvanised, packaging unit 25 No.				4,3	360262
	Hexagonal bolt M 16x100 DIN 931, 8.8, galvanised, packaging unit 25 No.				4,7	360264
	Hexagonal bolt M 16x120 DIN 931, 8.8, galvanised, packaging unit 25 No.				5,5	360268
	Hexagonal bolt M 16x140 DIN 931, 8.8, galvanised, packaging unit 25 No.				6,2	360272
	Hexagonal bolt M 18x100 DIN 931, 8.8, galvanised, packaging unit 25 No.				6,0	360334
	Hexagonal bolt M 18x160 DIN 931, 8.8, galvanised, packaging unit 25 No.				8,9	360346

	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
	Hexagonal bolt M 20x80 DIN 931, 8.8, galvanised, packaging unit 25 No.				6,4	360362
	Hexagonal bolt M 20x100 DIN 931, 8.8, galvanised, packaging unit 25 No.				7,6	360366
	Hexagonal bolt M 20x140 DIN 931, 8.8, galvanised, packaging unit 25 No.				10,0	360374
	Hexagonal bolt M 24x140 DIN 931, 8.8, galvanised, packaging unit 10 No.				6,0	360468
	Hexagonal bolt M 30x90 DIN 931, 8.8, galvanised, packaging unit 10 No.				7,1	360544
	Hexagonal bolt M 30x140 DIN 931, 8.8, galvanised, packaging unit 10 No.				9,8	360554
	Hexagonal bolt M 30x180 DIN 931, 8.8, galvanised, packaging unit 10 No.				12,0	360560
	Hexagonal bolt M 30x190 DIN 931, 8.8, galvanised, packaging unit 5 No.				6,3	360562

	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
	Hexagonal bolt M 30x200 DIN 931, 8.8, galvanised, packaging unit 5 No.				6,6	360564
	Hexagonal bolt M 30x260 DIN 931, 8.8, galvanised, packaging unit 5 No.				8,2	360572
	Hexagonal bolt M 30x400 DIN 931, 8.8, galvanised, packaging unit 5 No.				12,1	360586

Hex-head bolt DIN 933

	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
	Hexagonal bolt M 4x14 DIN 933, 8.8, galvanised, packaging unit 500 No.				1,0	362024
	Hexagonal bolt M 4x16 DIN 933, 8.8, galvanised, packaging unit 500 No.				1,1	362026
	Hexagonal bolt M 6x16 DIN 933, 8.8, galvanised, packaging unit 500 No.				2,6	362090
	Hexagonal bolt M 6x20 DIN 933, 8.8, galvanised, packaging unit 500 No.				2,9	362094
	Hexagonal bolt M 8x80 DIN 933, 8.8, galvanised, packaging unit 200 No.				6,3	362166
	Hexagonal bolt M 10x40 DIN 933, 8.8, galvanised, packaging unit 100 No.				3,4	362202
	Hexagonal bolt M 12x25 DIN 933, 8.8, galvanised, packaging unit 100 No.				3,4	362250
	Hexagonal bolt M 12x30 DIN 933, 8.8, galvanised, packaging unit 100 No.				3,8	362254

	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
	Hexagonal bolt M 12x70 DIN 933, 8.8, galvanised, packaging unit 50 No.				3,3	362270
	Hexagonal bolt M 16x30 DIN 933, 8.8, galvanised, packaging unit 50 No.				3,8	362340
	Hexagonal bolt M 16x40 DIN 933, 8.8, galvanised, packaging unit 50 No.				4,5	362344
	Hexagonal bolt M 16x50 DIN 933, 8.8, galvanised, packaging unit 50 No.				5,2	362348
	Hexagonal bolt M 16x70 DIN 933, 8.8, galvanised, packaging unit 25 No.				3,3	362356
	Hexagonal bolt M 16x80 DIN 933, 8.8, galvanised, packaging unit 25 No.				3,6	362358
	Hexagonal bolt M 16x100 DIN 933, 8.8, galvanised, packaging unit 25 No.				4,3	362364
	Hexagonal bolt M 16x140 DIN 933, 8.8, galvanised, packaging unit 25 No.				5,6	362372

Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
Hexagonal bolt M 16x160 DIN 933, 8.8, galvanised, packaging unit 25 No.				6,3	362376
Hexagonal bolt M 16x180 DIN 933, 8.8, galvanised, packaging unit 25 No.				6,9	362380
Hexagonal bolt M 20x80 DIN 933, 8.8, galvanised, packaging unit 25 No.				6,0	362438
Hexagonal bolt M 24x40 DIN 933, 8.8, galvanised, packaging unit 25 No.				6,1	362478
Hexagonal bolt M 24x50 DIN 933, 8.8, galvanised, packaging unit 25 No.				6,9	362482
Hexagonal bolt M 24x70 DIN 933, 8.8, galvanised, packaging unit 25 No.				8,4	362490
Hexagonal bolt M 24x80 DIN 933, 8.8, galvanised, packaging unit 25 No.				9,1	362494
Hexagonal bolt M 30x55 DIN 933, 8.8, galvanised, packaging unit 10 No.				5,2	362546
Hexagonal bolt M 36x80 DIN 933, 8.8, black, packaging unit 5 No.				5,0	363597

Flat-headed bolt

	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
	Flat-headed bolt M 8x35 DIN 603, 4.6, galvanised, packaging unit 200 No.				4,8	364082
	Flat-headed bolt M 8x50 DIN 603, 4.6, galvanised, packaging unit 200 No				6,0	364088
	Flat-headed bolt M 8x70 DIN 603, 4.6, galvanised, packaging unit 200 No				7,5	364096
	Flat-headed bolt M 8x100 DIN 603, 4.6, galvanised, packaging unit 100 No				5,0	364106
	Flat-headed bolt M 8x130 DIN 603, 4.6, galvanised, packaging unit 100 No				6,2	364112
	Flat-headed bolt M 12x65 DIN 603, 4.6, galvanised, packaging unit 50 No				4,5	364206
	Flat-headed bolt M 12x160 DIN 603, 4.6, galvanised, packaging unit 25 No				4,4	364228
	Flat-headed bolt M 12x240 DIN 603, 4.6, galvanised, packaging unit 25 No.				6,2	364240
	Flat-headed bolt M 16x100 DIN 603, 4.6, galvanised, packaging unit 25 No.				5,7	364274
	Flat-headed bolt M 16x120 DIN 603, 4.6, galvanised, packaging unit 25 No.				6,5	364278

	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
	Flat-headed bolt M 16x140 DIN 603, 4.6, galvanised, packaging unit 25 No.				7,3	364282
	Flat-headed bolt M 16x160 DIN 603, 4.6, galvanised, packaging unit 25 No.				8,1	364286
	Flat-headed bolt M 16x180 DIN 603, 4.6, galvanised, packaging unit 25 No.				8,9	364290
	Flat-headed bolt M 16x200 DIN 603, 4.6, galvanised, packaging unit 25 No.				9,7	364294
	Flat-headed bolt M 16x240 DIN 603, 4.6, galvanised, packaging unit 25 No.				11,3	364298
	Flat-headed bolt M 16x280 DIN 603, 4.6, galvanised, packaging unit 25 No.				12,9	364302
	Flat-headed bolt M 16x300 DIN 603, 4.6, galvanised, packaging unit 25 No.				13,7	364304

Countersunk screw

	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
	Countersunk bolt M 6x20 DIN 7991, 8.8, galvanised, packaging unit 500 No.				2,2	365088
	Countersunk bolt M 8x16 DIN 7991, 8.8, galvanised, packaging unit 200 No.				1,3	365124
	Countersunk bolt M 8x30 DIN 7991, 8.8, galvanised, packaging unit 200 No.				2,0	365132
	Countersunk bolt M 8x35 DIN 7991, 8.8, galvanised, packaging unit 200 No.				2,3	365134
	Countersunk bolt M 8x45 DIN 7991, 8.8, galvanised, packaging unit 200 No.				3,0	365138
	Countersunk bolt M 8x60 DIN 7991, 8.8, galvanised, packaging unit 200 No.				4,5	365144
	Countersunk bolt M 8x90 DIN 7991, 8.8, galvanised, packaging unit 100 No.				3,5	365152
	Countersunk bolt M 10x30 DIN 7991, 8.8, galvanised, packaging unit 200 No.				3,3	365168
	Countersunk bolt M 12x50 DIN 7991, 8.8, galvanised, packaging unit 100 No.				4,3	365210
	Countersunk bolt M 16x35 DIN 7991, 8.8, galvanised, packaging unit 50 No.				2,9	365232

Cylindrical bolts

	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
	Cylindrical bolt M 8x50 DIN 7984, 8.8, galvanised, packaging unit 200 No.				4,4	369000
	Hexagon socket head cap bolt M 10x100 DIN 912, 8.8, galvanised, packaging unit 100 No.				7,1	366266
	Hexagon socket head cap bolt M 12x40 DIN 912, 8.8, galvanised, packaging unit 100 No.				4,7	366296
	Hexagon socket head cap bolt M 10x50 DIN 6912, 8.8, galvanised, packaging unit 100 No.				3,5	367132
	Hexagon socket head cap bolt M 10x60 DIN 6912, 8.8, galvanised, packaging unit 100 No.				4,0	367136
	Hexagon socket head cap bolt M 16x30 DIN 6912, 8.8, galvanised, packaging unit 100 No.				6,3	367172
	Hexagon socket head cap bolt M 16x40 DIN 6912, 8.8, galvanised, packaging unit 100 No.				7,9	367176
	Hexagon socket head cap bolt M 16x65 DIN 912, 8.8, galvanised, packaging unit 50 No.				6,5	366402
	Hexagon socket head cap bolt M 24 DIN 912, 8.8, galvanised, packaging unit 25 No.				7,0	366474

Hex-head wood screws

	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
	Hex-head wood screw M 8x60 for fastening timber piece, DIN 571, galvanised, packaging unit 200 No.				4,2	369002

Hexagonal nuts

	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
	Hexagonal nut M 8 DIN 934, 8.0, galvanised, packaging unit 1000 No.				4,7	370016
	Hexagonal nut M 10 DIN 934, 8.0, galvanised, packaging unit 500 No.				5,1	370018
	Hexagonal nut M 12 DIN 934, 8.0, galvanised, packaging unit 200 No.				3,0	370020
	Hexagonal nut M 16 DIN 934, 8.0, galvanised, packaging unit 200 No.				6,0	370024
	Safety nut M 16 DIN 985, 8.0, galvanised, packaging unit 1 No.				0,0	373013
	Hexagonal nut M 18 DIN 934, 8.0, galvanised, packaging unit 100 No.				4,3	370026
	Hexagonal nut M 20 DIN 934, 8.0, galvanised, packaging unit 100 No.				5,5	370028
	Hexagonal nut M 24 DIN 934, 8.0, galvanised, packaging unit 50 No.				5,5	370032

	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
	Hexagonal nut M 27 DIN 934, 8.0, galvanised, packaging unit 25 No.				4,1	370034
	Hexagonal nut M 30 DIN 934, 8.0, galvanised, packaging unit 25 No.				5,6	370036
	Hexagonal nut M 36 DIN 934, 8.0, galvanised, packaging unit 20 No.				7,9	370040

Safety nut

	Description	Length mm	Width mm	Height mm	Weight approx. kg	Part No.
	Safety nut M 4 DIN 985, galvanised, packaging unit 1000 No.				1,0	372002
	Safety nut M 8 DIN 985, 8.0, galvanised, packaging unit 1000 No.				5,1	373004
	Safety nut M 12 DIN 985, 8.0, galvanised, packaging unit 200 No.				3,4	373008
	Safety nut M 16 DIN 985, 8.0, galvanised, packaging unit 200 No.				6,8	373012
	Safety nut M 20 DIN 985, 8.0, galvanised, packaging unit 100 No.				6,5	373016

Plain washer

	Description	Ø mm	Width mm	Height mm	Weight approx. kg	Part No.
	Washer shape A 6.4 DIN 125, black, packaging unit 1000 No.	6,4			1,1	381014
	Washer shape A 8.4 DIN 125, galvanised, packaging unit 1000 No.	8,4			2,1	380018
	Washer shape A 10.5 DIN 125, galvanised, packaging unit 500 No.	10,5			2,0	380020
	Washer 10.5 DIN 433, galvanised, packaging unit 1000 No.	10,5			1,0	389002
	Washer shape A 13 DIN 125, galvanised, packaging unit 500 No.	13,0			3,1	380022
	Washer shape A 15 DIN 125, black, packaging unit 250 No.	15,0			2,2	381024
	Washer shape A 17 DIN 125, galvanised, packaging unit 250 No.	17,0			2,8	380026
	Washer shape A 17 DIN 125, black, packaging unit 250 No.	17,0			2,8	381026
	Washer shape A 19 DIN 125, galvanised, packaging unit 250 No.	19,0			2,9	380028
	Washer shape A 21 DIN 125, galvanised, packaging unit 250 No.	21,0			4,3	380030
	Washer shape A 25 DIN 125, galvanised, packaging unit 100 No.	25,0			3,2	380034
	Washer shape A 28 DIN 125, galvanised, packaging unit 50 No.	28,0			2,1	380036

	Description	Ø mm	Width mm	Height mm	Weight approx. kg	Part No.
	Washer shape A 31 DIN 125, galvanised, packaging unit 50 No.	31,0			2,7	380038

Lock washers

	Description	Ø mm	Width mm	Height mm	Weight approx. kg	Part No.
	Shaft safety ring A 15 DIN 471, galvanised, packaging unit 1000 No.				1,0	389004

Year Numbers

	Description	Mat size A approx. mm	Mat size B approx. mm	Mat strength approx. mm	Weight approx. kg	Part No.
	Jahreszahl In acc. with guideline drawing - Year 1 - of the German Federal/State Expert Committee on Bridge and Construction Engineering BMV Dpt. StB. Please indicate the year number when ordering! The last two digits of part no. indicate the year.	455	255	20	2,2	569000

Description

1000 mm high set.....	108
2500 mm high set.....	108
2750 mm high set.....	108
500 mm high set.....	108
90° internal corner	3, 20, 22
Adapter for attaching handrail tubes	34
Adapter for NOEprop deck prop	132, 145
Adjustable external corner	21
Adjustable internal corner	21
Adjustable wedge clamp	23, 51
Adjustment clamp NOEtop / NOEalu L.....	51
ADS folding tripod	151
ADS prop A	150
ADS prop B	150
ADS Telescopic tripod	151
Alignment channel	8, 25, 50, 81, 89, 96
Alignment clamp	7, 23
Aluminium compensation girder.....	118
Aluminium corner chamfer strips with plastic insert	21
Aluminium cross beam.....	118
Aluminium deck panel 1500 mm.....	118
Aluminium deck panel 900 mm*.....	118
Aluminium external corner angle 90°	20
Aluminium longitudinal girder	117
Anchor.. 5, 16, 36, 54, 69, 122, 124, 130, 159, 171, 179, 181, 193, 194, 195, 197, 198, 200	
Anchor bolt M 24x280.....	197
Anchor bolt M 36x430.....	159, 197
Anchor bolt Ø 26.5	171, 195
Anchor loop.....	42, 68, 69, 70
Anchor loop Ø 26.5 mm	70
Anchor sleeve Ø 26.5	171, 195
Anchor support for smooth cone	42, 68, 69, 70
Anchoring support	68, 69, 70
Anti-slip mat.....	46
AR collar	176, 180
AR collar long	176, 180
AR crane eye	179, 181
AR Cross-beam	138, 182
AR diagonal brace	138, 176, 178, 181, 182
AR guard rail posts	179
AR lynch pin for tubes	176, 179, 180
AR O locking bar	138, 176, 178, 179, 180, 182
AR O steel deck	176, 179, 181
AR spindle fixture	177, 180
AR stair internal guard-rail	178
AR standard.....	138, 176, 178, 179, 180, 182
AR steps.....	178
AR TG spindle holder.....	178
Back fixing	161
Base extension	168
Base R 275.....	86
Beam clamp 300 V.....	127
Beam extension 600 V.....	127
Belt with ratchet 2.5 T.....	123, 129, 136, 143, 164, 174, 198
Blade clamp.....	136, 143, 202
Board.....	167, 176
Boarding for extension	154
Bolt M 10x40	117
Bolt M 12x90	32, 168
Bolt M 16x100	85, 94, 99, 107, 115, 133, 135, 158
Bolt M 16x30	63, 80, 85, 94, 99, 107, 115, 129, 132, 135
Bolt M 16x40	11, 26, 64, 117, 132, 145
Bolt M 16x50 8.8	63, 144
Bolt M 16x60 10.9	158

Bolt M 16x70.....	41, 65, 67, 76, 94, 99
Bolt M 16x80.....	85, 158
Bolt M 18x100.....	10, 45
Bolt M 18x160.....	10, 11, 24, 26, 45
Bolt M 24x160.....	164
Bolt M 36x60 8.8.....	159
Bolt MMS-plus 16X130 SSK	36, 54, 122
Bolt Tr 26x55.....	160
Bolted coupler 48/M 16.....	71, 202
Bolting pin for handrail tube.....	37, 122, 200
Bolting plate.....	134
Bolts	25, 161
Bottom spindle mount.....	161
Bottom support adapter plate	156, 166
Bracing 17, 40, 41, 44, 61, 63, 64, 66, 67, 109, 117, 126, 139, 198	
Bracing extension.....	109
bracing U 160	63
Bracing U 80.....	41, 67
Bracket corner left	167
Bracket corner right	167
Bridging platform.....	168
Cavity wall clip	199
Chain hoist	137
Chamfer profiles 10	111
Chamfer profiles 21	111
Clamp plate.....	64
Clip	172
Combi 20 hinge end joint.....	76
Combi 20 S girder.....	92, 98
Combi butt strap.....	93, 99
Combi console.....	129
Compensation bridge.....	118
Compensation channel	8, 25, 50, 64, 82, 90, 97
Concreting scaffold end guard rail	31, 32, 37
Connecting platform	157
Connection angle for R 110 circular formwork external formwork units	92
Connection angle for R 110 circular formwork Internal formwork units	93
Connection bow.....	63
Connection channel for R 250 circular formwork	98
Corner tie plate	190
Corner unit.....	167
Counterplate.....	160
Countersunk bolt M 10x30	214
Countersunk bolt M 12x50	214
Countersunk bolt M 16x35	214
Countersunk bolt M 6x20	214
Countersunk bolt M 8x16	214
Countersunk bolt M 8x30	25, 214
Countersunk bolt M 8x35	139, 214
Countersunk bolt M 8x45	214
Countersunk bolt M 8x60	214
Countersunk bolt M 8x90	214
Coupler 48/76	202
Coupler 48/48.....	71, 169, 177, 179, 181, 202
Coupler 48/48 rigid.....	71, 179, 181, 202
Coupler 48/60	158, 169, 202
Coupler nut	29, 69, 188
Coupler piece for BKS stabilizer	76
Crane hook.....	12, 46, 51, 85, 110, 134, 198
Crane hook bow	198
Crane hook for deck table.....	134
Crane hook support	134
Crane suspension, retractable	134

Cross beam, wood 1500	118	Folding tripod claw	143
Cross waler	84, 92, 98	Fork	126, 127, 149, 164, 175
Cross waler external unit	92	Fork claw	127
Cross waler for external formwork	84, 98	Fork head	126, 149
Cross waler internal unit	92	FORM-CLIP 6X42 (40X40)	37, 55
CS Barrier box	37, 54, 122	Formwork safety restraint	166
CS frame grillage 1256	36, 54, 122	Foundation clamp	12, 43, 56
CS frame grillage 2556	36, 54, 122	Front safety fastening	161
Cylindrical bolt M 8x50	148, 215	Girder clamp	119
Deck table bracket	137	Girder end-piece	84
Deck table tying support	133	Girder fork	128, 139
Dehoplast tape	86	guard rail	13, 30, 31, 35, 36, 37, 52, 53, 54, 55, 103, 112, 121, 122, 133, 134, 135, 154, 155, 157, 165, 167, 168, 169, 179, 200
Disc bolt M 8x40	85, 94, 99	Guard rail board	158
Dispensing and cutting trolley	43, 56	Guard rail clamp 1.40 m	128, 165, 169, 200
Double headed earth nail	67, 197	Guard rail extension	165, 168
Drophead	117	Guard rail extension for protection net	165
Euro-prop D 25	141	Guard rail I for external corner unit	155
Euro-prop D 30	141	Guard rail II for external corner unit	155
Euro-prop D 35	141	Guard rail post tube	133
Euro-prop D 55	141	Guard rail tube 1380 GR	35, 52, 121
Euro-prop E 25	142, 152	Guard rail tube 1880 GR	35, 121
Euro-prop E 25 with attached drophead	152	Guard rail tube holder for deck table	133
Euro-prop E 30	142, 152	Guard rail tube holder left	135
Euro-prop E 30 with attached drophead	152	Guard rail tube holder right	134
Euro-prop E 35	142, 152	Guardrail post tube 1600	35, 53, 120
Euro-prop E 35 with attached drophead	152	Guide roller	161
Euro-prop E 40	142, 152	H 20 timber beam	126
Euro-prop E 40 with attached drophead	152	Hammer-head bolt 9, 27, 44, 61, 63, 65, 73, 76, 77, 106, 115	
Euro-props BC 25	140	Hammer-head bolt with handle 9, 27, 44, 63, 65, 73, 76, 77, 106, 115	
Euro-props CD 30	140	Handrail clamp 1.00 m	128, 165, 169, 200
Euro-props CD 40	140	Handrail post attachment	120
Euro-props CD 55	140	Handrail tube 1060.13, 30, 34, 52, 82, 90, 97, 104, 112, 120, 200	
Extension channel	8, 24, 25, 50	Handrail tube 1380 H 13, 30, 34, 52, 82, 90, 97, 104, 112, 120, 135, 200	
Extension clamp	7, 8, 25, 80	Head plates hinge end joint	76
Extension left	154	Head support	40, 66, 77
Extension right	154	Hexagon socket head cap bolt M 10x100	215
Extension tube	187	Hexagon socket head cap bolt M 10x50	215
External corner angle 90° 150mm	4	Hexagon socket head cap bolt M 10x60	215
External corner panels 1000	20	Hexagon socket head cap bolt M 12x40	215
External corner panels 750	20	Hexagon socket head cap bolt M 16x30	215
External corner unit	155	Hexagon socket head cap bolt M 16x40	215
External corner working platform 4000 mm	155	Hexagon socket head cap bolt M 16x65	215
External unit	78, 95	Hexagon socket head cap bolt M 24	215
Fastening bow for NOEtop	162	Hexagonal bolt M 10x40	209
FG castor	176	Hexagonal bolt M 12x25	209
Fixing head for deck table	133	Hexagonal bolt M 12x30	209
Flat-headed bolt M 12x160	212	Hexagonal bolt M 12x60	205
Flat-headed bolt M 12x240	212	Hexagonal bolt M 12x70	210
Flat-headed bolt M 12x65	212	Hexagonal bolt M 12x85	205
Flat-headed bolt M 16x100	212	Hexagonal bolt M 12x90	205
Flat-headed bolt M 16x120	212	Hexagonal bolt M 16x100	116, 158, 206, 210
Flat-headed bolt M 16x140	213	Hexagonal bolt M 16x120	206
Flat-headed bolt M 16x160	213	Hexagonal bolt M 16x140	206, 210
Flat-headed bolt M 16x180	213	Hexagonal bolt M 16x160	211
Flat-headed bolt M 16x200	213	Hexagonal bolt M 16x180	211
Flat-headed bolt M 16x240	213	Hexagonal bolt M 16x30	116, 210
Flat-headed bolt M 16x280	213	Hexagonal bolt M 16x40	134, 162, 210
Flat-headed bolt M 16x300	213	Hexagonal bolt M 16x50	205, 210
Flat-headed bolt M 8x100	212	Hexagonal bolt M 16x70	205, 210
Flat-headed bolt M 8x130	170, 212	Hexagonal bolt M 16x80	206, 210
Flat-headed bolt M 8x35	212	Hexagonal bolt M 16x90	206
Flat-headed bolt M 8x50	212		
Flat-headed bolt M 8x70	212		
Folding bracket	172		
Folding tripod 48-80	143		
Folding tripod 85-120	143, 149		

Hexagonal bolt M 18x100	206	Light walkway bracket	52
Hexagonal bolt M 18x160	206	Longitudinal girder	119, 138, 182
Hexagonal bolt M 20x100	162, 207	Longitudinal girder adapter	119
Hexagonal bolt M 20x120	162	Lower platform	157
Hexagonal bolt M 20x140	162, 207	L-pin Ø 16	8, 10, 15, 73, 74, 75, 106, 114
Hexagonal bolt M 20x80	207, 211	LSS ladder 2800	34, 38, 55, 105, 114
Hexagonal bolt M 24x140	207	LSS ladder extension left	104, 113
Hexagonal bolt M 24x40	211	LSS ladder with back-propping	105, 113
Hexagonal bolt M 24x50	211	Mounting extension	168
Hexagonal bolt M 24x70	211	Multi-claw	20
Hexagonal bolt M 24x80	211	Multi-hole C-Profil	93, 100
Hexagonal bolt M 30x140	207	Nail plate for anchor bolt M 24	197
Hexagonal bolt M 30x180	207	Nail plate for anchor bolt M 36	159, 198
Hexagonal bolt M 30x190	207	Nail plate for tie cone	160, 186
Hexagonal bolt M 30x200	208	NOE Alulock	51
Hexagonal bolt M 30x260	208	NOE anchor cap D 15	16, 36, 54, 122, 194, 200
Hexagonal bolt M 30x400	208	NOE beam angle 300	127
Hexagonal bolt M 30x90	207	NOE beam extension 600	127
Hexagonal bolt M 4x14	209	NOE Combi 20 girder	64, 84, 134
Hexagonal bolt M 4x16	209	NOE EinsA magnetic bearings	28, 44, 185
Hexagonal bolt M 6x16	209	NOE FixCone	190
Hexagonal bolt M 6x20	209	NOE H20 Lifter	139
Hexagonal bolt M 8x100	205	NOE H20 Lifter anti-tilt device	139
Hexagonal bolt M 8x40	205	NOE H20 Lifter modular rail	139
Hexagonal bolt M 8x80	33, 104, 112, 205, 209	NOE HBF connection bolt	61
Hexagonal nut 30	28, 58, 89, 96, 164, 185	NOE HBF end piece	60
Hexagonal nut 60	28, 58, 185	NOE HBF extension 1	60
Hexagonal nut M 10	216	NOE HBF extension 2	60
Hexagonal nut M 12	216	NOE HBF spindle front	61
Hexagonal nut M 16	116, 134, 158, 162, 216	NOE HBF spindle rear	61
Hexagonal nut M 18	216	NOE HBF standard	60
Hexagonal nut M 20	216	NOE lever arm	11, 26
Hexagonal nut M 24	216	NOE nailing plate D 15	16, 194
Hexagonal nut M 27	217	NOE nailing plug D 15	16, 194
Hexagonal nut M 30	217	NOE plug D 15	16, 122, 194
Hexagonal nut M 36	217	NOE special release agent	88
Hexagonal nut M 8	33, 139, 148, 170, 216	NOE Toplock	7, 23, 79, 89, 96, 109
Hex-head wood screw M 8x60	216	NOE Toplock adapter NOEtop / NOEtop R	23
Hinge Ø 60 mm	72, 74, 75, 106, 114	NOE Toplock adapter NOEtop R 275 / NOE R 250	79, 96
Hinged scaffold	14, 31, 32	NOE Toplock H	7, 23
Hinged scaffold steel	31	NOE Toplock X	7, 23, 79
Hinged scaffold steel connector	31	NOE transport hanger	12, 46
Hinged scaffold steel platform extension	31	NOEalu L / NOEtop R 275 adapter clamp	51, 79
Hinged scaffold with hatch	32	NOEalu L adjustable external corner	50
intermediate piece 600	76	NOEalu L adjustable internal corner	49
Internal corner working platform 6000 mm	155	NOEalu L Aluminium platform with hatch	55
Internal unit	78, 95	NOEalu L end guard rail	55
Jahreszahl	219	NOEalu L External corner	49
Key for steel cone	166, 187	NOEalu L external corner panel	49
Ladder support with step	34, 55	NOEalu L fixing claw	56
Levelling jack	198	NOEalu L internal corner	49
Lever head	11, 26	NOEalu L overfall guard	52
LG-W 200 column	173	NOEalu L panels 1250 mm high	48
LG-W 200 bolt M 10x60	174	NOEalu L panels 1500 mm high	48
LG-W 200 column	173	NOEalu L panels 2750 mm high	48
LG-W 200 diagonal	173	NOEalu L walkway bracket	52
LG-W 200 Fork mount	175	NOEalu L Wedge bracer	49
LG-W 200 head spindle 160	174	NOEalu LTying claw	56
LG-W 200 ladder	175	NOEbox	46, 59, 204
LG-W 200 Mounting base for shoring	174	NOEcase 1200 x 800 mm	47, 59, 204
LG-W 200 plug 9 mm	13, 30, 35, 54, 82, 90, 97, 112, 120, 133, 138, 174, 182, 200	NOEclamp	146, 147, 148
LG-W 200 stiffening	173	NOEdeck Aluminium longitudinal girder Gen.2	117
LG-W 200 Transfer truck	175	NOEdeck head piece 38 mm	117
LG-W 200 tube connector	174	NOEdeck panel connector	119
Lifting pin	12, 46	NOEform screw 7x21	111
		NOEprop 300 (T 30)	144

NOEprop 300 (T30) with attached drophead	152	NOEtop S ladder support with step	33, 34, 38
NOEprop 400 (E 40)	144	NOEtop S ring bolt M 6 x 40	39
NOEprop 400 (E40) with attached drophead	152	NOEtop S round steel link chain	39
NOEprop 580 (D 55)	144	NOEtop S support tube Gen.2	39
NOEprop adapter	144	NOEtop S working platforms	38
NOEprop frame	146, 147	NOEtop scaffold platform	34
NOEprop installation frame	147	NOEtop scaffold platform with hatch	34
NOEprop spanner	149	NOEtop stabilizer connector	15, 72, 75
NOEsafe carrying case	125, 131	NOEtop stop-end support	10, 24, 45
NOEsafe frame grid box	35, 53, 121	NOEtop stripping corner	11, 26
NOEsafe PPE kit 6 m	125, 131	NOEtop4 adjustable external corner	4
NOEsafe PPE kit 9 m	125, 131	NOEtop4 adjuster nut	5
NOEsafe protective grille 2600	35, 53, 121, 201	NOEtop4 alignment channel	25
NOEsafe railing bracket	36, 53, 121, 201	NOEtop4 conical anchor rods	5
NOEsafe railing tube 1450mm	35, 53, 121, 201	NOEtop4 distance protection	5
NOEsafe safety harness	125, 131	NOEtop4 Fix Support	5
NOEsafe self-retracting lifeline 6 m	124, 125, 130, 131	NOEtop4 Hinged scaffold steel	14
NOEsafe self-retracting lifeline 9 m	124, 125, 130, 131	NOEtop4 locking pin	5
NOEstep	45	NOEtop4 PU exposed concrete cone	5
NOEtable swivelling head	132, 145	NOEtop4 Safety Bolt	5, 8, 74
NOEtable transfer truck	138, 182	NOEtop4 securing bracket	5
NOEtec compensation plate for concreting socket on NOEalu L	203	NOEtop4 spring pin	5
NOEtec concreting spout 642 mm with IW 100 impact damper	203	NOEtop4 stripping corners	11
NOEtec connection plate for concreting socket NOEtop	203	Open spanner SW 36	166
NOEtec connection plate for concreting socket on NOEalu L	203	Pallet for deck props	73, 143, 204
NOEtec impact damper IW 100	203	Pallet for NOEprop props	149, 204
NOEtec IW 100 concrete ejector	203	Panels ... 1, 2, 8, 12, 13, 17, 18, 19, 20, 22, 23, 24, 25, 28, 30, 33, 44, 46, 47, 48, 49, 50, 51, 52, 55, 57, 63, 79, 87, 89, 91, 101, 102, 108, 109, 110, 118, 123, 126, 185, 191, 192, 193	
NOEtec lip seal for quick-release coupling	203	Panels*	18
NOEtec quick-release coupling	203	Perforated steel strap	12, 43, 56
NOEtop 4 adjustable internal corner	4	Pin5, 8, 10, 15, 37, 40, 41, 66, 67, 73, 74, 75, 77, 82, 90, 97, 102, 103, 106, 107, 113, 114, 115, 122, 126, 148, 155, 169, 172, 176, 179, 180, 199, 200	
NOEtop adapter end guard rail	37	Pipe-head shaped key SW 32	166, 187
NOEtop Bolt 76	16	Plastic storage washer II	46
NOEtop bracket jack	84	Plastic tube Ø 42 mm	159
NOEtop Connection bolt 100	36, 54, 122, 194	Plastic tubes	190
NOEtop Connection screw 250	10, 45, 49, 110	Plastic tubes circular	190
NOEtop EinsA Distance compensation	28, 44, 185	Plate for aluminium prop	150
NOEtop EinsA Fixlager	28, 44, 185	Plate nut	185
NOEtop end guard rail	37	Plug SFL 42	159
NOEtop fixing claw	43	Prop A with attached drophead	153
NOEtop formwork support	16	Prop B with attached drophead	153
NOEtop FS crane suspension	102	Prop folding tripod 48-80	143
NOEtop FS guard rail 450	103	Prop support	11, 27
NOEtop FS guard rail 900	103	PU formwork joint tape	187
NOEtop FS ladder bracket	105, 113	Push/pull brace Push/pull 1.00-1.51 m	15, 72
NOEtop FS locking bracket	102	Push/pull brace Push/pull 2.10-3.65 m	15, 72
NOEtop FS panel with steel facing	102	Push/pull brace Push/pull 2.77-5.00 m	15, 72
NOEtop FS Sliding plate S	102	Push-pull prop	15, 73
NOEtop large panel (with cantilever)	17	PVC plastic plug 17 mm	193
NOEtop large panels (compatible with NOE Top 2000)	17	PVC plastic plug ST 20	191
NOEtop large panels (with cantilever)	17	PVC plastic plug ST 22	191
NOEtop multifunction panel	18	PVC plastic plugs	47, 57, 87, 91, 101, 171, 191, 192, 193, 195, 196
NOEtop R 275 connection profile	84	PVC plastic plugs M 16	193, 196
NOEtop R 275 extension bar	80	PVC plastic plugs SFL 23	47, 192
NOEtop R 275 extension clamp	80	PVC plastic plugs SFL 25	57, 192
NOEtop R Klemmhalter	83	PVC plastic plugs SFL 30	47, 87, 91, 101, 192
NOEtop S buffer support	38	PVC plastic plugs SFL 30 with NOE-logo	47, 87, 91, 101, 192
NOEtop S clamping shoe	38, 39	PVC plastic plugs SFL 32	57, 193
NOEtop S clamping shoe Gen.2	39	PVC plastic plugs ST 26	47, 191
NOEtop S compensation platform	39	PVC plastic plugs ST 32	191
NOEtop S formwork spindle Gen.2	39	PVC plastic plugs ST 34	191
NOEtop S front guard rails	38, 39		
NOEtop S front guard rails Gen.2	39		
NOEtop S ladder extension Gen.2	39		

PVC plastic plugs Tr 26x5.....	193
Quadruple sling ropes	46
R 110 external unit.....	88
R 110 internal unit.....	88, 92
Raking prop 6.40-10.30 m.....	73
Ratio concreting brackets 100.....	82, 90, 97
Reinforcement for base NOEtop R 275	86
Rock bolt Ø 15	68
Rod with tie rod thread and end plate	184
Round calotte plate.....	6, 69
RS platform 875x1375.....	112
RS platform 875x875.....	112
RS platform Back-propping 790	106, 114
RS platform guard rail 375	112
RS platform guard rail 750	103, 112
RS platform ladder adapter NOE Vario 2000 column formwork	105, 114
RS platform ladder support platform	103, 113
Rubber plate.....	33
Runner.....	161
Safety net	165, 169
Safety nut M 12.....	32, 217
Safety nut M 16.....	85, 93, 99, 135, 196, 216, 217
Safety nut M 20.....	163, 217
Safety nut M 4.....	217
Safety nut M 8.....	25, 217
Safety spring.....	150
Scaffold bolt M 27	171
Scaffold bolt M 36	159
Scaffold tube	71, 158, 165, 169, 177, 179, 202
Scaffold units.....	167
Screw base	41, 65, 67, 186
Screw nail fix	128, 135
Shaft safety ring A 15	163, 219
Shelf bracket 68cm.....	67, 197
Shuttering rail.....	129, 199
Sling rope	137
Socket M 24.....	197
Spacer block 2400	76
Spacer block 3700	76
Spacer washer for M 16	63, 85, 93, 99
Spacer washer for M 27	171
Spanner	119, 160, 187
Spanner bolt R 12x35	119
Spanner for nailing plat e.....	160, 187
Spindle. 39, 61, 62, 64, 76, 161, 164, 174, 177, 178, 180, 198	
Spindle M 36	64
Spindle Tr 60/9	64
Spreader bar.....	81, 96
Spring pin Ø 4 mm.....	8, 10, 15, 73, 74, 75, 106, 114
Spring pin Ø 5 mm.....	40, 41, 67
Sprint nut 9, 27, 28, 41, 44, 58, 63, 65, 67, 68, 73, 76, 82, 90, 97, 102, 104, 106, 110, 113, 115, 133, 160, 185	
Square insert M 24.....	197
Square insert M 36.....	159, 198
Square nut.....	186
Stacking foot	100
Standard deck table	132
Steel cone.....	160
Steel tube deck prop	141, 142
Stiffener.....	93, 100
Stop-end clamp	24, 45
Stop-end support	81, 89, 96
Stripping tool smooth cone.....	42, 68, 69, 70
Strut	40, 41, 61, 66, 75, 77, 145
Strut connection head bearing.....	41, 77, 145

Strut RSK 6	75
Strut RSK 8	75
Support bracket	62, 69
Support bracket extension.....	62
Support bracket extension large.....	62
Support cone 20 mm	190
Support cone 22 mm	190
Support cone 26 mm	190
Support for walkway bracket.....	62
Support tube for panel.....	161
Supporting plate	15, 41, 67, 73, 74, 75
Supporting plate for push/pull brace/raking props/stabilizers	15, 73, 74, 75
Suspension head for hinged concreting scaffold	32
Suspension hinged bracket scaffold on the deck table....	135
Suspension hook I	159
Suspension hook Ø 10/100	171
Suspension shoe	171
Suspension tube.....	157
Table lifting fork 5000	137
Table lifting fork 8000	137
Three-ply boards.....	126
Tie cone.....	29, 160, 186, 188
Tie cone conical plastic shell	29, 186, 188
Tie cone Ø 20 mm, complete	29, 188
Tie cone Ø 20 mm, steel insert	29, 188
Tie cone steel insert.....	186
Tie rod coupler nut Ø 15 mm.....	68, 186
Tie rod coupler nut Ø 26.5 mm.....	70, 189
Tie rod Ø 15 mm .. 20, 28, 41, 58, 65, 67, 68, 82, 90, 97, 104, 113, 160, 164, 183, 184	
Tie rod Ø 20 mm	6, 29, 69, 188
Tie rod Ø 26.5 mm	70, 189
Tie stirrup H 20	128
Tilt restraint	45
Top Adjustable lock.....	24, 79, 110
Top walkway bracket	13, 30
Toplock.....	24, 110
Transport pallet	123
Travelling device	123, 137
Triangle tying plate	186
Tube spanner SW 36	166
Tube spanner SW 41/46	171, 195
Tube spanner SW 55	166
Turnbuckle	84, 92, 98
Tying claw	12, 43
Tying nut Ø 20 mm.....	6, 29, 69, 188
Tying nut Ø 26.5 mm.....	70, 189
Tying plate	44
Tying shoe	109
Tying shoe extension	109
Tying shoe extension short	109
Tying support	41, 67
Tying unit	109
Waling plate... 6, 8, 11, 20, 24, 27, 28, 29, 45, 49, 58, 63, 65, 68, 69, 70, 73, 77, 82, 90, 97, 106, 110, 115, 185, 188, 189	
Waling plate Ø 20 mm	6
Waling plate Ø 20 mm	29, 69
Waling plate with wing nut.....	6, 29, 69, 188
Washer 10.5.....	148, 218
Washer shape A 10.5	218
Washer shape A 13	218
Washer shape A 15	218
Washer shape A 17	16, 116, 134, 158, 163, 196, 218
Washer shape A 19	218

Washer shape A 21	163, 218	113300.....	123
Washer shape A 25	218	113310.....	123
Washer shape A 28	218	114920.....	120
Washer shape A 31	219	115312.....	118
Washer shape A 6.4	218	115322.....	118
Washer shape A 8.4	33, 139, 148, 170, 218	115332.....	118
Waterstop	58, 186	115342.....	118
Waterstop coupler	58, 186	115352.....	118
Waved anchor	42, 68, 69, 70	115362.....	118
Waved anchor Ø 20 mm	69	115396.....	119
Waved anchor Ø 26.5 mm	70	115400.....	117
Wedge clamp	23, 128, 135	115401.....	117
Wedge clamping collar	165, 169	115402.....	117
wedge disk M16 DIN 435	64	115404.....	117
Wedge for guard rail tube GR	35, 53, 121	115407.....	117
Wedge lock	89, 96	115409.....	117
Wedge plate	89, 96	115410.....	118
Welded coupler 48mm	202	115412.....	118
Welded coupler 60mm	202	115414.....	118
Wheel flange plate	161	115416.....	118
Wheel flange roller	161	115425.....	117
Wing head bolt	89, 96	115430.....	119
Wooden gauge for internal radius	78, 95	115443.....	117
Wooden template for external radius	78, 88, 95	116150.....	118
Wooden template for external radius NOE R 110	88	117240.....	41, 65, 67, 186
Wooden template for internal radius NOE R 110	88	117242.....	184
Working platform 4000 mm	154	124560.....	102
Working platform 6000 mm	154	124562.....	102
Working platform with hatch 4000 mm	154, 155	124564.....	102
Part No.		124566.....	102
7, 8, 20, 25, 28, 32, 47, 57, 58, 80, 82, 90, 97, 124, 130,		124608.....	102
160, 164, 183, 192		124632.....	102
102520	89, 96	124635.....	102
106445	51	124637.....	102
108030	43, 56	124639.....	102
108031	12, 43, 56	124640.....	103
110214	128, 135	124641.....	103
110215	128	124645.....	103
110250	126	124646.....	103
110290	126	125252.....	108, 109
110330	126	125253.....	108, 109
110390	126	125254.....	108, 109
110490	126	125255.....	108, 109
110590	126	126050.....	108, 109
110690	128, 135	126060.....	108, 109
110710	127	126062.....	108
110714	126	126063.....	108
110715	126, 149	126064.....	108
110722	136, 143, 202	126065.....	108
110730	128, 139	126179.....	109
110800	127	126180.....	109
110810	127	126190.....	109
110900	127	126700.....	112
110910	127	126702.....	112
111400	13, 30, 34, 52, 82, 90, 97, 104, 112, 120, 200	126705.....	105
111401	35, 52, 53, 120	126706.....	105, 113
111402	37, 122, 200	126707.....	104, 113
111403	13, 30, 34, 52, 82, 90, 97, 104, 112, 120, 135, 200	126708.....	104, 113
111410	134	126720.....	112
111411	133	126721.....	103, 112
111412	134	126725.....	106, 114
111413	135	126726.....	105, 113
111500	133	126727.....	103, 113
112520	117	126729.....	105, 113, 114
112900	118	126740.....	114
113100	119	126741.....	114

126742	114
126757	106, 114
126760	34, 38, 55, 105
126761	34, 38, 55, 105
126762	34, 38, 55, 105
126763	34, 38, 55, 105
126764	34, 38, 55, 105
135009	89, 96
135010	36, 54, 122, 194
135019	10, 45, 49, 110
135109	8, 25, 50, 64, 82, 90, 97
135208	8, 24, 25, 50
135210	8, 25, 50, 81, 89, 96
135309	7, 23
135905	12, 46, 85, 110
136200	23
136209	23
136701	43
136808	12, 46
137297	12, 43
137500	12, 43
137570	45
137761	26
137762	26
137768	26
137812	4
137830	24, 45
137847	4
137848	4
137850	7, 8, 25, 80
137863	4
137864	4
137865	4
137868	11
137869	11
137870	11
137960	7, 23, 79
137970	7, 23
137976	7, 23, 26, 79, 109
137977	79, 96
137978	79, 89
137979	23
137985	24, 79, 110
137990	24, 110
138090	23
160065	18
160067	18
160068	18
160070	18
160071	18
160073	18
160074	18
160075	18
160076	20
160077	20
160078	20
163009	20
163010	20
163019	18
163209	18
163309	18
163409	18
163509	18
163609	18
163749	18
163909	18

164000	21
164001	21
164002	21
164003	21
164005	21
164006	21
164007	21
164008	21
164030	20
164032	10, 24, 45
164036	10, 24, 45
164040	44
164042	21
164043	21
164044	21
164045	21
164061	20
164063	20
164064	20
164065	20
164700	16
164704	16
165020	1
165022	1
165024	1
165026	1
165028	1
165030	1
165040	1
165042	1
165044	1
165046	1
165048	1
165050	1
165060	1
165062	1
165064	1
165066	1
165068	1
165070	1
165080	4
165082	4
165084	4
165090	3
165092	3
165094	3
165120	2
165122	2
165124	2
165126	2
165128	2
165130	2
165140	2
165142	2
165144	2
165146	2
165148	2
165150	2
165160	2
165162	2
165164	2
165166	2
165168	2
165170	2
165180	4
165182	4

165184.....	4	168509.....	18
165190.....	3	168609.....	18
165192.....	3	168749.....	18
165194.....	3	168909.....	18
167009.....	20	169009.....	18
167010.....	20	169209.....	18
167019.....	20	169309.....	18
167020.....	20	169409.....	18
167209.....	20	169509.....	18
167219.....	20	169609.....	18
167249.....	20	169749.....	18
167278.....	19	169909.....	18
167280.....	19	261000.....	93, 100
167282.....	19	275000.....	126
167284.....	19	275100.....	126
167286.....	19	275200.....	126
167288.....	19	275201.....	126
167290.....	19	310907.....	85, 94, 99
167292.....	19	311100.....	117, 152
167294.....	19	311600.....	32, 168
167296.....	19	312500.....	171
167320.....	19	312510.....	171
167321.....	19	312520.....	171
167322.....	19	312530.....	171
167324.....	19	312540.....	171
167326.....	19	312550.....	171
167328.....	19	312560.....	171
167330.....	19	312570.....	171
167332.....	19	312610.....	159
167334.....	19	312620.....	159
167336.....	19	312630.....	159
167338.....	19	312640.....	159
167340.....	19	312650.....	159
167363.....	22	312660.....	159
167366.....	22	312670.....	159
167372.....	22	312680.....	159
167376.....	22	312699.....	104, 112, 120
167378.....	19	313151.....	36, 54, 122
167380.....	19	313200.....	63, 80, 84, 85, 86, 92, 93, 94, 98, 99, 100, 103, 107, 113, 115, 128, 129, 132, 134, 135, 190
167381.....	19	313400.....	11, 26, 64, 117, 132, 145, 152, 153
167382.....	19	313500.....	62, 63, 144
167384.....	19	313600.....	158
167385.....	19	313800.....	41, 65, 67, 76, 94, 99, 100
167387.....	19	313900.....	85, 158
167388.....	19	314000.....	84, 85, 92, 94, 98, 99, 107, 115, 133, 135, 158
167389.....	19	314600.....	7, 8, 25, 63, 80, 85, 93, 99
167390.....	19	317009.....	111
168019.....	18	317700.....	171
168020.....	18	318100.....	164
168021.....	18	318200.....	159
168022.....	18	318801.....	10, 45
168029.....	17	318900.....	10, 11, 24, 26, 45
168033.....	17	319315.....	61, 65
168049.....	17	319338.....	9, 11, 27, 44, 63, 73, 76, 105, 106, 114, 115
168051.....	17	319339.....	9, 27, 44, 65
168052.....	17	319341.....	119
168053.....	17	319343.....	9, 11, 27, 44, 45, 63, 65, 73, 77, 106, 115
168060.....	17	319350.....	11, 27, 45, 63, 65, 73, 77, 106, 115
168061.....	17	330500.....	198
168062.....	17	330600.....	193
168065.....	17	350000.....	89, 96
168066.....	17	350170.....	198
168067.....	17	350200.....	134
168209.....	18	350201.....	134
168309.....	18	350205.....	134
168409.....	18		

350297	92	360544	207
350298	92	360554	207
350299	84, 98	360560	207
350300	84, 98	360562	207
350301	84	360564	208
350310	84, 92, 98	360572	208
350311	92	360586	208
350315	84, 92, 98	361248	205
350320	84, 92, 98	362024	209
350330	81, 96	362026	209
350340	98	362090	209
350350	98	362094	209
350360	98	362166	209
350362	93	362202	209
350363	93	362250	209
350364	93	362254	209
350365	92	362270	210
350366	92	362340	116, 210
350367	92	362344	134, 162, 210
350368	84	362348	210
350369	84	362356	210
350370	84	362358	210
350380	93, 100	362364	116, 210
350381	84	362372	210
350390	81, 89, 96	362376	211
350410	100	362380	211
350412	86	362438	211
350413	86	362478	211
351000	78	362482	211
351010	78	362490	211
351020	78	362494	211
351030	78	362546	211
351040	78	363597	211
351050	78	364082	212
351100	78	364088	212
351110	78	364096	212
351120	78	364106	212
351130	78	364112	170, 212
351140	78	364206	212
351150	78	364228	212
352200	93, 99	364240	212
352210	80	364274	212
352212	80	364278	212
352220	78, 95	364282	213
352221	78, 95	364286	213
352222	88	364290	213
352223	88	364294	213
360064	205	364298	213
360078	33, 205	364302	213
360086	205	364304	213
360162	205	365088	214
360170	205	365124	214
360172	205	365132	25, 214
360256	205	365134	139, 214
360258	206	365138	214
360262	206	365144	214
360264	158, 206	365152	214
360268	206	365168	214
360272	206	365210	214
360334	206	365232	214
360346	206	366266	215
360362	207	366296	215
360366	162, 207	366402	215
360370	162	366474	215
360374	162, 207	367132	215
360468	207	367136	215

367172.....	215	402436.....	48
367176.....	215	402443.....	48
369000.....	148, 215	402450.....	48
369002.....	216	402452.....	48
370016.....	33, 139, 148, 170, 216	402454.....	48
370018.....	216	402456.....	48
370020.....	216	402458.....	48
370024.....	116, 134, 158, 162, 216	402460.....	48
370026.....	216	402462.....	48
370028.....	216	402464.....	48
370032.....	216	402468.....	49
370034.....	217	402470.....	49
370036.....	217	402500.....	56
370040.....	217	402502.....	56
372002.....	217	402512.....	51
373004.....	25, 217	402525.....	51
373008.....	32, 217	402526.....	51
373012.....	85, 93, 99, 135, 196, 217	402527.....	51, 79
373013.....	7, 8, 25, 80, 134, 216	402530.....	49
373016.....	163, 217	402540.....	56
380018.....	33, 139, 148, 170, 218	402620.....	51
380020.....	218	402621.....	51
380022.....	218	402662.....	49
380026.....	16, 116, 134, 158, 163, 196, 218	402664.....	49
380028.....	218	402666.....	49
380030.....	163, 218	402710.....	55
380034.....	218	402720.....	49
380036.....	218	402722.....	50
380038.....	219	402724.....	49
381014.....	218	402726.....	50
381024.....	218	440301.....	88
381026.....	218	440302.....	88
389002.....	148, 218	440303.....	88
389004.....	163, 219	440307.....	88
389011.....	62, 64	440308.....	88
390350.....	166	440309.....	88
390355.....	166	441501.....	95
390900.....	166	441502.....	95
391900.....	149	441503.....	95
394300.....	187	441504.....	95
394400.....	187	441505.....	95
394500.....	171, 195	441506.....	95
394901.....	166, 187	441507.....	95
398202.....	11, 26	441508.....	95
402276.....	49	441509.....	95
402313.....	50	441510.....	95
402400.....	48	441511.....	95
402402.....	48	441512.....	95
402403.....	48	447425.....	152
402404.....	48	447430.....	152
402406.....	48	447435.....	152
402408.....	48	447440.....	152
402410.....	48	447510.....	153
402412.....	48	447511.....	153
402416.....	49	447551.....	152
402418.....	49	447552.....	152
402420.....	48	447553.....	152
402421.....	48	449990.....	137
402422.....	48	449991.....	137
402423.....	48	452325.....	167
402424.....	48	461907.....	159
402426.....	48	466712.....	160, 187
402428.....	48	469654.....	135
402430.....	48	479945.....	19
402432.....	49	501000.....	71, 158, 169, 202
402434.....	49	501500.....	71, 158, 169, 202

502000	71, 158, 169, 202
502500	71, 158, 169, 177, 202
503000	71, 158, 169, 202
503500	71, 158, 169, 179, 202
504000	71, 158, 165, 169, 202
504500	71, 158, 169, 202
505000	71, 158, 169, 202
505500	71, 158, 169, 202
506000	71, 158, 165, 202
507010	35, 36, 52, 54, 121, 122
507011	35, 36, 54, 121, 122
507012	35, 52, 53, 121
507020	36, 53, 121, 201
507024	35, 53, 121, 201
507029	36, 53, 121, 201
507040	35, 53, 121, 201
507042	35, 53, 121
507045	36, 54, 122
507047	36, 54, 122
507048	37, 54, 122
510300	71, 169, 177, 179, 181, 202
510310	71, 179, 181, 202
510600	158, 169, 202
510800	202
514000	202
514200	71, 202
514500	202
522503	14
522504	14
522545	14
530014	82, 90, 97
530031	67, 197
530032	67, 197
540210	76
540900	60
540905	60
540910	60
540915	60
540920	61
540922	61
540928	61
541000	62
541010	62
541011	62
541020	62
541024	40, 66
541025	40, 66
541029	61, 63
541030	63
541031	64
541032	64
541033	63
541034	40, 66
541035	40, 66
541036	40, 66, 77
541039	40, 66
541040	64
541041	41, 67
541044	40, 66
541050	64
541052	41, 67
541053	40, 41, 66, 67, 77
541060	41, 77, 145
541092	68
541190	64
541991	42, 68

541992	42, 69
541993	42, 70
541994	42, 68
541995	69
541996	70
541998	42, 68, 69, 70
542005	42, 68
542006	42, 68
542007	42, 68
542008	69
542009	70
542010	70
542011	68
542012	69
542013	70
542014	69
543030	41, 67
543060	62
550010	34
550012	34
550014	34
550023	33, 34, 38
550024	34, 55
550025	34
550060	38
550061	38
550062	38
550063	38
550064	38
550066	38
550068	38
550070	38
550080	39
550130	38
550131	38
550132	38
550133	38
550134	38
550136	38
550138	38
550140	38
550142	38
550143	38
550145	39
550147	39
550148	39
550175	39
550504	39
550530	39
550531	39
550532	39
552202	52, 55
552204	13, 30
552207	52
552210	32
552211	32
552212	32
552213	199
552214	13, 30
552215	83
552216	37
552217	37
552218	32, 37
552223	129
552224	129, 199
552229	199

552232.....	199	557245.....	161
552233.....	129, 199	557246.....	73, 156, 166
552240.....	31	557250.....	154
552241.....	31	557252.....	154
552243.....	31	557254.....	154, 155
552250.....	31	557256.....	155
552251.....	31	557258.....	157
552267.....	31	557260.....	157
552268.....	31	557262.....	155
553212.....	52	557264.....	157
553213.....	55	557266.....	155
555940.....	39	557268.....	154
555950.....	39	557270.....	154
555960.....	37, 55	557272.....	154
555990.....	31, 103, 107, 113, 115, 126, 155, 169, 172	557276.....	156, 166
556000.....	172	559100.....	133
556003.....	52	569000.....	219
556004.....	30	569710.....	88
556007.....	33	569720.....	88
556008.....	33	569730.....	88
556100.....	168	615160.....	203
556110.....	168	615161.....	203
556120.....	171	615162.....	203
556140.....	171	615163.....	203
556160.....	168	615164.....	203
556170.....	165, 169	615165.....	203
556180.....	165, 169	615166.....	203
556190.....	165, 169	615167.....	203
556915.....	168	660951.....	70, 189
556916.....	168	670300.....	65, 82, 90, 97, 184
556917.....	167	670400.....	164, 184
556918.....	167	670500.....	184
556924.....	32	670600.....	104, 113, 184
556925.....	167	670750.....	184
556926.....	32	670950.....	20, 28, 58, 68, 184
556930.....	167	670959.....	6, 29, 69, 188
556935.....	167	671000.....	184
556940.....	167	671250.....	184
556950.....	167	671259.....	6, 29, 188
556999.....	167	671500.....	82, 90, 97, 184
557208.....	164	671509.....	29, 188
557212.....	160, 166, 187	671750.....	184
557213.....	160	671759.....	29, 188
557214.....	157	672000.....	41, 67, 184
557215.....	157	672250.....	184
557216.....	166	672500.....	184
557217.....	159	672509.....	29, 188
557219.....	164	672750.....	184
557220.....	165	673000.....	184
557221.....	157	673250.....	184
557222.....	155	673500.....	184
557223.....	155	673750.....	184
557224.....	158	674000.....	184
557225.....	158	674250.....	184
557226.....	158	674500.....	184
557227.....	158	674750.....	184
557232.....	161	675000.....	184
557233.....	161	675250.....	184
557234.....	161	675500.....	184
557237.....	161	675750.....	184
557238.....	161	680009.....	6, 29, 69, 188
557239.....	161	680010.....	70, 189
557241.....	161	680045.....	28, 44, 185
557242.....	162	680052.....	28, 44, 185
557243.....	161	680060.....	28, 44, 185
557244.....	161		

680580 ... 9, 28, 41, 58, 65, 67, 68, 82, 90, 97, 102, 104, 110, 113, 160, 185	
680590	185
680900	28, 58, 89, 96, 164, 185
681000	28, 58, 185
681300	186
682202	58, 186
682203	58, 186
682220	29, 69, 188
682230	70, 189
682500	186
684000	68, 186
686900	160, 166, 186, 187
686901	29, 186, 188
686902	186
686910	29, 188
686911	29, 188
691200	185
691400	185
691500	45, 110
691509	6
691510	70, 189
691519	29, 69
691600	6, 29, 69, 188
691601	6, 69
691700	8, 20, 24, 28, 49, 58, 68, 82, 90, 97, 185
691800	68
692000	190
692002	190
692004	190
692006	190
692012	190
692801	190
692910	159
693200	191
693400	191
693406	171, 193, 195
693408	57, 193
693409	47, 87, 91, 101, 192
693500	57, 192
693515	47, 87, 91, 101, 192
693620	47, 191
693700	191
693800	191
693810	190
693900	47, 192
693910	159
694210	190
694211	190
694212	190
694901	16, 36, 54, 122, 194, 200
694902	16, 194
694903	16, 194
694904	16, 122, 194
694981	11, 26
694982	11, 26
697010	8, 10, 15, 73, 74, 75, 106, 114
697012	72, 74, 75, 106, 114
697014	15, 73, 74, 75
697026	15, 72
697027	15, 72
697028	15, 72
697032	15, 72, 75
697036	73
697044	74
697045	74, 106, 114

697130	76
697132	76
697133	15, 73
697134	76
697136	76
697138	76
697140	76
697145	75
697146	75
697400	198
697401	142
697422	141
697425	142
697430	142
697435	142
697440	142
697510	150
697511	150
697525	141
697530	141
697535	141
697550	141
697551	144
697552	144
697553	144
697558	144
697559	144
697591	47, 59, 204
697597	149, 204
697598	46, 59, 204
697599	73, 143, 204
697725	140
697730	140
697735	140
697740	140
697755	140
699010	132, 145
699020	132
699030	132
699040	132
699050	132
699150	132
699200	133
740725	84
740750	92, 98
741475	84
741500	92, 98
742975	84
743000	92, 98
760500	183
760600	183
760750	183
760950	183
761000	183
761250	183
761500	183
761750	183
762000	183
762250	183
762500	183
762750	183
763000	183
763250	183
763500	183
763750	183
764000	183

764250.....	183	868030.....	176, 180
764500.....	183	868031.....	176, 180
764750.....	183	868041.....	180
765000.....	183	868043.....	178
765250.....	183	868044.....	177, 180
765500.....	183	868055.....	178
765750.....	183	868104.....	138, 182
766000.....	183	868106.....	176, 180
766250.....	183	868108.....	178
766500.....	183	868110.....	138, 176, 182
766750.....	183	868111.....	178, 180
767000.....	183	868161.....	176
767250.....	183	868164.....	176
767500.....	183	868202.....	176, 181
810060.....	199	868203.....	178
810252.....	171, 193, 195	868205.....	138, 176, 182
810254.....	171, 195	868206.....	178, 181
811800.....	197	868218.....	138, 182
811805.....	197	868301.....	181
811811.....	197	868305.....	176
811900.....	159, 197, 198	868306.....	179
811905.....	159, 198	868336.....	176
811911.....	159, 198	868340.....	177
811920.....	166, 187	868400.....	181
811970.....	197	868410.....	180
811991.....	160, 166, 186, 187	868420.....	178
811992.....	159, 198	868425.....	178
821110.....	7, 8, 25, 80, 84, 93, 99, 196	868427.....	178
822400.....	160	868430.....	179
829000.....	193	868431.....	179
829010.....	193	868441.....	179, 181
829100.....	193, 196	868445.....	179, 181
840492.....	187	868446.....	179, 181
840520.....	86	868450.....	176
840630.....	111	868451.....	179, 181
840710.....	111	890450.....	123
840720.....	111	890802.....	175
840730.....	111	890803.....	175
840740.....	111	890810.....	173
841201.....	102	890811.....	173
850006.....	5	890812.....	173
850007.....	5	890813.....	173
850008.....	5	890814.....	173
850009.....	5	890815.....	173
850011.....	5	890816.....	173
850012.....	5	890818.....	173
850013.....	5	890819.....	175
850014.....	8, 74	890822.....	173
850039.....	25	890826.....	173
850050.....	3	890828.....	173, 174
850051.....	3	890830.....	174
850052.....	3	890831.....	174
850055.....	5	890834.....	13, 30, 35, 54, 82, 83, 90, 97, 112, 120, 133, 138, 173, 174, 182, 200
867120.....	138	890835.....	174
867121.....	138, 182	890840.....	174
867122.....	138, 182	890845.....	11, 27
867200.....	139	890850.....	147, 148
867201.....	139	890852.....	148
867202.....	139	890854.....	147
868001.....	176, 179, 180	890863.....	147
868003.....	138, 176, 180, 182	890865.....	147
868004.....	176	890870.....	147
868005.....	138, 176, 182	890871.....	147
868006.....	138, 176, 180, 182	890883.....	146
868015.....	178	890885.....	146
868021.....	176, 179, 180		

890886	146
890890	146
890896	147
890897	147
890950	151
890951	151
890980	150
900050	128, 165, 169, 200
900052	128, 165, 169, 200
900070	143
900072	143
900073	143, 149
900074	143
900075	143
911500	172
912400	150
913021	21
913022	21
913023	21
913024	21
913303	5
913304	8, 10, 15, 73, 74, 75, 106, 114

913305	40, 41, 66, 67, 77
919036	45
919070	46
922480	133
922500	137
922700	137
922800	137
922900	46
922910	12, 46
922960	124, 125, 130, 131
922961	124, 125, 130, 131
922962	125, 131
922963	125, 131
922964	125, 131
922965	125, 131
924950	11, 26
926110	190
928012	5
990013	123, 129, 136, 143, 164, 174, 198
990152	46



NOE-Schaltechnik
Georg Meyer-Keller GmbH + Co. KG

Kuntzestr. 72, 73079 Süssen
T + 49 7162 13-1
F + 49 7162 13-288
info@noe.de
www.noe.eu

Belgien

NOE-Bekistingtechniek N.V.
info@noe.be
www.noe.eu

Frankreich

NOE-France
info@noefrance.fr
www.noe.eu

Niederlande

NOE-Bekistingtechniek b.v.
info@noe.nl
www.noe.eu

Österreich

NOE-Schaltechnik
noe@noe-schaltechnik.at
www.noe.eu

Polen

NOE-PL Sp. Zo.o.
noe@noe.pl
www.noe.pl

Schweiz

NOE-Schaltechnik
info@noe.ch
www.noe.eu